

BLODGETT GAS CONVECTION OVEN | INSTRUCTIONS

Installation & Connection –

(To be installed in compliance with AGA & local gas regulations)

Natural/LPG Piped Connection:

- Obtain qualified installation

L.P.G Gas Bottle Connection:

- Unit must be installed in areas with adequate ventilation
- Connect to the gas bottle
- If you suspect a gas leak, check external oven connections only with soapy water or a gas leak detector. If using soapy water, bubbles should appear at the leak point.
- **CONTACT CATERALL TO FIX.**

Operation –

(Refer to Diagram 1.0)

- 1) Ensure gas supply and power supply is ON and connected.
- 2) Set thermostat to “0”. Locate the Pilot (behind hatch in lower front panel).
- 3) Push + hold the Pilot button (located above the thermostat knob).
- 4) While continuing to hold the Pilot button, light the pilot using a match or lighter (this process may take up to 10 minutes).
- 5) Once pilot lights, continue holding button for a full 15 seconds.
(NOTE: if pilot flame does not remain ignited, wait 5 minutes and start again from Step 3).
- 6) Turn convection fan ON.
- 7) Set desired thermostat temperature.
(the unit will now operate on the thermostat)
- 8) To turn unit OFF, push STOP button located above thermostat knob.
- 9) Disconnect gas + power supplies

FAN SWITCH

Manual – continuously ON

Automatic – turns OFF when doors open

LIGHT SWITCH – controls lights

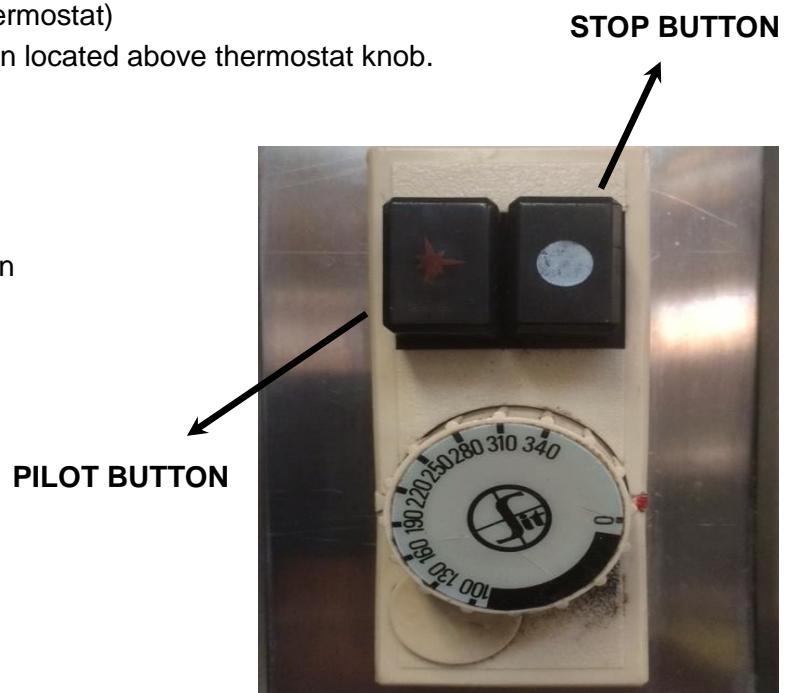


Diagram 1.0