

ActiveCore Series

General Display



ActiveCore[®] Advanced Refrigeration System



Compliance Independently Verified



Food-Safe Keeps food below 5^{°C}



High Efficiency Major Energy Savings



Full Warranty ActiveCore Series

Introducing ActiveCore 2 with:



 \bigcirc

R290 Natural Refrigerant A Green Choice

SKOPE-connect™ [▲] App Store Puts you in control ► Cooole play





5 Year Warranty

ActiveCore[™] Series



Full Warranty ActiveCore Series

SKOPE Finance

Depend on us for flexible finance.

ActiveCore[™] Our most advanced fridge series ever! Now with a **5** year warranty on every model.

Advantages to your Business


- A more reliable system 1
- Minimise your customer disruption 2
- Exceptional whole of life value from your fridge
- (4) Peace of mind with a 5 year warranty protection



With our revolutionary interchangeable ActiveCore cartridge system for easy servicing

ActiveCore[™] vs previous model

Warranty - % of sales 2016





Warranty - Cost/call 2016





wo Finance Options	SKOPE Cashflow Boost	SKOPE Flexi Term
Extended warranty protection for the agreement duration	\odot	\oslash
No repayments & interest free for the first 12 months	\odot	Θ
Fixed term (5 years)	\oslash	Θ
Flexible term (1-5 years)	Θ	${\boldsymbol{ \oslash}}$
Handback option at 12 months - you can return the equipment	Θ	\bigotimes
Includes annual on-site preventative maintenance check for the agreement duration	Θ	\bigotimes
Based on SKOPE RRP	\oslash	Θ
Based on the dealers negotiated price	Θ	\bigotimes
Own the product at the end of your term	\odot	${\boldsymbol{ \oslash}}$

Quick & Easy Application



Online - application form www.skope.com/finance

Phone - speak to a Finance team member NZ 0800 947 5673 (opt. 4) AUS 1800 121 535 (opt. 4)



Our two hire purchase finance options help you sell more SKOPE with less hassle. Help your customers stay ahead with the latest SKOPE refrigeration & extend their warranty protection.



1 hour - contracts up to \$10,000 Same Day - contracts over \$10,000

Both SKOPE Finance options require a deposit; 10% for Australia, 15% for New Zealand. Hire Purchase leases are subject to terms and conditions contained in the SKOPE Finance Hire Purchase agreement. A copy of the agreement can be obtained from SKOPE Finance. * ActiveCore Series - Full 5 Year Warranty Applies.

Multi-Purpose Refrigeration General Display & Storage

Top Mount Fridges with ActiveCore technology reduce energy spend & TME650-A* 1 door widen the practical uses of the fridge – with an extensive range of TME1000-A* 2 door options to choose from, a refrigeration solution can be created whatever the need. TME1500-A 3 door Colour White / White - Exterior / Interior Black / Black - Exterior / Interior Black / White - Exterior / Interior Stainless steel Selected Dulux Powdercoat colour Door Glass (Double Low-E equivalent) Solid Tropical (heated glass) Gen-3 Series look (Double Low-E) Locks Tab locks Barrel door locks Shelving Additional shelves 0 0*** Gravity matting Sign No sign Sign panel Lit sign 0 Internal lights Side Shelf

Remote unit Remote unit

Standard Option BME1200-A only 🔺 BME600-AC & BME1200-AC only (lit sign models) 🛆 BME AC models only * Note: These models now come with R290 Natural Refrigerant and SKOPE-connect™ app ** Note: this model does not include ActiveCore cartridge


*** Conditional; requires shelving change (contact SKOPE)



TME-A

Features

BME-A	SKT-A	SKB-A
Bottom Mount	Top Mount	Bottom Mount
BME600-A 1 door	SKT500 X** 1 door	SKB600-A 1 door
BME1200-A 2 door	SKT650-A 1 door	SKB900-A 2 door
BME1500-A 3 door	SKT1000-A 2 door	SKB1200-A 2 door
	SKT1500-A 3 door	SKB1500-A 3 door
•	•	•
•	0	0
	0	0
	0	0
•	•	•
	0	0
	0	0
	0	
•	•	•
	0	0
0	0	0
O***	0	0
•		•
	•	
Δ	0	0
•	•	•
	0	0
	0	0

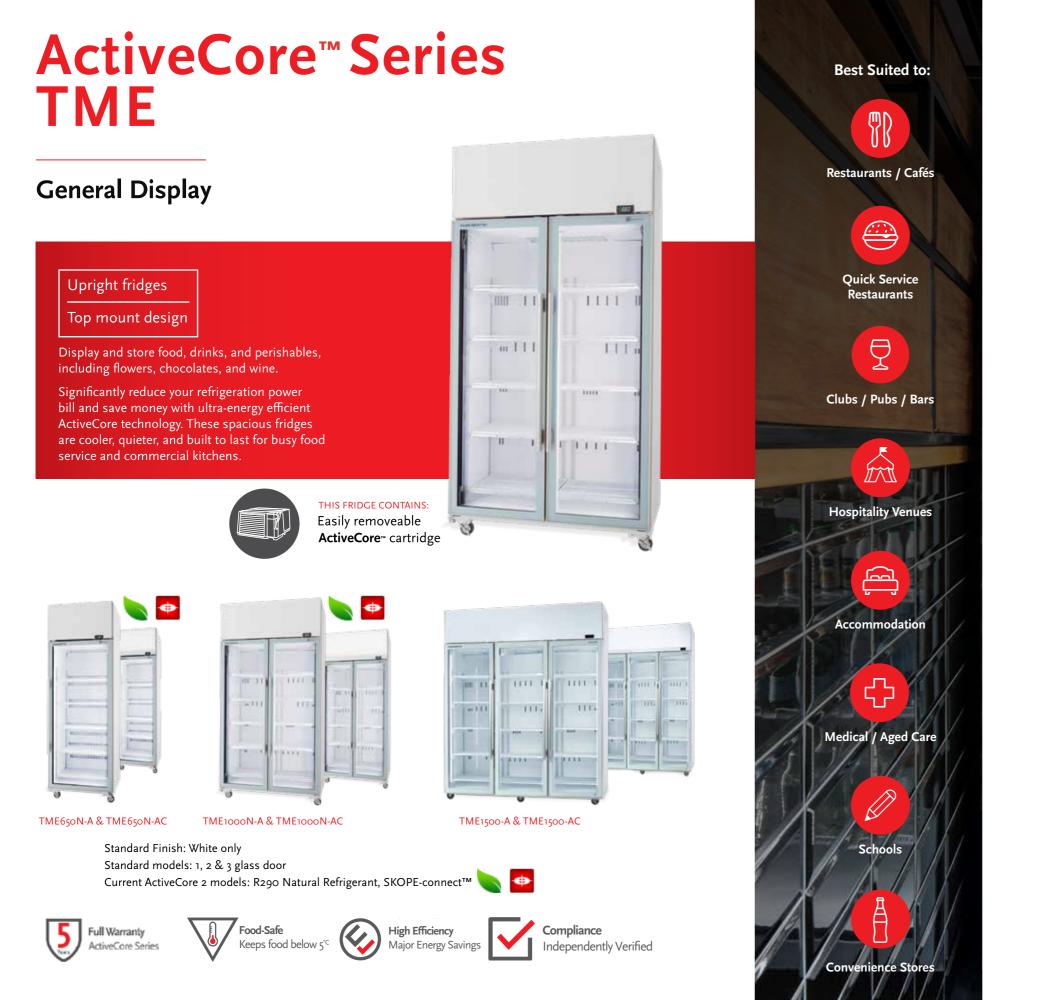

Quick Guide

ActiveCore[™] Series TME

Premium build qua Display & store -Food, drinks & per ActiveCore techno Market leading ene SKOPE premium co **R290 Natural Refrig** SKOPE-connect[™] Solid & tropical do Full colour options Remote available

Standard Feat

Customisable

SKOPE premium co ActiveCore cartridg Premium energy eff Frameless glass do SKOPE patented EZ Bright LED lighting Door lock tabs Sign panel Slotted back panel Optimal airflow des

Low noise fan syste

Options

- Lit sign (AC model) •
- Extra shelf & slides/clips •
- Gravity feed shelving •

lity	\oslash
ishables	\oslash
ology	
ergy efficiency	\odot
ontroller	\odot
gerant (1 & 2 door only)	Ø Ø Ø Ø Ø Ø Ø Ø Ø
app (1 & 2 door only)	\oslash
or options	See SKT range
	See SKT range
	See SKT range
	See SKT range
ures	Benefits
ontroller	Easy to use with pre-programmed features
ge system	pre-programmed features Maximum performance, minimal
ge system ficient glass	pre-programmed features Maximum performance, minimal energy & easy servicing
ge system ficient glass por design	pre-programmed features Maximum performance, minimal energy & easy servicing Double Low-E equivalent
ge system ficient glass por design ZI-CLIP	pre-programmed features Maximum performance, minimal energy & easy servicing Double Low-E equivalent Modern appealing look
ge system ficient glass por design ZI-CLIP	pre-programmed features Maximum performance, minimal energy & easy servicing Double Low-E equivalent Modern appealing look Quick shelf set up & adjustment
ontroller ge system fficient glass por design ZI-CLIP g	pre-programmed features Maximum performance, minimal energy & easy servicing Double Low-E equivalent Modern appealing look Quick shelf set up & adjustment Showcasing products inside
ge system ficient glass por design ZI-CLIP	pre-programmed features Maximum performance, minimal energy & easy servicing Double Low-E equivalent Modern appealing look Quick shelf set up & adjustment Showcasing products inside Extra security
ge system fficient glass oor design ZI-CLIP g	pre-programmed features Maximum performance, minimal energy & easy servicing Double Low-E equivalent Modern appealing look Quick shelf set up & adjustment Showcasing products inside Extra security Branding opportunities
ge system ficient glass por design ZI-CLIP	pre-programmed features Maximum performance, minimal energy & easy servicing Double Low-E equivalent Modern appealing look Quick shelf set up & adjustment Showcasing products inside Extra security Branding opportunities Chilled air directly onto products Minimal internal temperature


Specifications TME650N-A TME1000N-A TME1500-A Fridge - 1 Door Fridge - 2 Door Fridge - 3 Door Fridge/Freezer - doors Self Contained/Remote Self Contained Self Contained Self Contained TME650N-A TME1000N-A TME1500-A Model ID External Dimensions (W x D x H mm) 1130 x 745 x 2200 740 x 745 x 2200 1705 x 745 x 2200 Total floor area (m²) 0.84 0.55 1.27 Weight (kg) 170 225 320 Glass Door (solid/glass) Glass Glass Remote duty (Watts @ -5°C SST) N/A N/A N/A Breathes from / Expels air to Upper front / top Upper front / top Upper front / top Sign Sign panel Sign panel Sign panel Cabinet construction Powdercoated steel Powdercoated steel Powdercoated steel Drainage (plumbing required) No No No Internal 610 Gross volume (litres) 980 1497 Lighting 1 x T8 LED tube $_2 \times T8$ LED Tube $2 \times T8$ LED Tube and $1 \times LED$ Module No. of shelves (per door) 5 5 5 Shelf design White plastic coated wire White plastic coated wire White plastic coated wire Total shelf area (m²) 1.46 2.35 3.69 Product facings (600ml PET bottle) 40 70 110 Performance MEPS category Мı Mı Mı (M1-food & drinks, M2-drinks) MEPS efficiency (kWh/24h/m²) 3.56 @ Climate Class 3 4.95 3.43 Temperature range 1ºC - 4ºC 1°C - 4°C 1°C - 4°C TEC (kWh/24h) @ Climate Class 3 3.72 8.07 2.67 Yes Yes High efficiency model Yes Maximum ambient temperature* 43⁰C 43⁰C 43⁰C Climate Class rating 5 5 5 Removable ActiveCore cartridge Yes Yes Yes Refrigerant / Charge R290 / 99g R134a / 475g R290 / 99g 1.05 1.63 Total display area (m²) 0.73 Electrical Electrical power (kW) 0.84 0.96 1.15 4.8 Current draw (Amps) 2.9 3.0 Yes 10 Amp 3 pin plug Yes Yes Controller & temperature display Electronic Electronic Electronic


Yes


Yes

Yes

Line Drawings







Ventilation required

* 40°C if cabinet is built-in

Light switch on controller

ActiveCore[™] **Series** BME

General Display



Quick Guide

ActiveCoreTM Series BME

Best Suited to:

P

Restaurants / Cafés

Premium build qual Display & store -Food, drinks & peri ActiveCore[™] technol Market leading ene SKOPE premium co Solid & tropical doc Full colour options Remote available Customisable

Standard Featu

SKOPE premium co
ActiveCore cartridg
Premium energy eff
Frameless glass doo
SKOPE patented EZ
Bright LED lighting
Door lock tabs
Sign panel
Slotted back panel
Optimal airflow des

Low noise fan syste

Options

٠


- Lit sign (AC mo •
 - Extra shelf & s
- Gravity feed sh ٠


lity	\oslash
shables	$\boldsymbol{\oslash}$
logy	$\overline{\boldsymbol{\oslash}}$
rgy efficiency	Ø Ø Ø Ø
ontroller	$\overline{\mathbf{O}}$
or options	See SKB range
	See SKB range
	See SKB range
	See SKB range
ures	Benefits
ontroller	Easy to use with pre-programmed features
ge system	Maximum performance, minimal energy & easy servicing
ficient glass	Double Low-E equivalent
or design	Modern appealing look
ZI-CLIP	Quick shelf set up & adjustment
[Showcasing products inside
	Extra security
	Branding opportunities
	Chilled air directly onto products
sign	Minimal internal temperature variations
em	Quiet operation
odel) lides/clips nelving	


Specifications

Specifications	BME6ooN-A	BME1200N-A	BME1500-A
Fridge/Freezer - doors	Fridge - 1 Door	Fridge - 2 Door	Fridge - 3 Door
Self Contained/Remote	Self Contained	Self Contained	Self Contained
Model ID	BME600N-A	BME1200N-A	BME1500-A
External			
Dimensions (W x D x H mm)	740 x 795 x 2005/2195 (AC)	1280 x 795 x 2005/2195 (AC)	1640 x 795 x 2005/2195 (AC)
Total floor area (m²)	0.63	1.08	1.34
Weight (kg)	185	245	330
Door (solid/glass)	Glass	Glass	Glass
Electronic controller	Yes	Yes	Yes
Remote duty (Watts @ -5°C SST)	N/A	N/A	N/A
Breathes from / Expels air to	Lower front / lower rear	Lower front / lower rear	Lower front / lower rear
Sign	No sign	No sign	No sign
Cabinet construction	Powdercoated steel	Powdercoated steel	Powdercoated steel
Drainage (plumbing required)	No	No	No
Internal			
Gross volume (litres)	584	1079	1433
ighting	1 × T8 LED Tube	2 × T8 LED Tube	2 × T8 LED Tube and 1 × LED Modu
No. of shelves (per door)	5	5	5
Shelf design	4 x wire, 1 x s/s	4 x wire, 1 x s/s	4 x wire, 1 x s/s
Total shelf area (m²)	1.62	3.00	3.90
Product facings (600ml PET bottle)	45	80	95
Performance			
MEPS category			
(M1-food & drinks, M2-drinks)	Mı	Mı	Mı
MEPS efficiency (kWh/24h/m²) @ Climate Class 3	3.26	3.01	4-37
Temperature range	1°C - 4°C	1°C - 4°C	1°C - 4°C
TEC (kWh/24h) @ Climate Class 3	2.29	3-43	6.63
High efficiency model	Yes	Yes	Yes
Maximum ambient temperature*	43°C	43°C	43°C
Climate Class rating	5	5	5
Removable ActiveCore cartridge	Yes	Yes	Yes
Refrigerant / Charge	R290 / 99g	R290 / 99g	R134a / 475g
Total display area (m²)	0.70	1.18	1.52
Electrical			
Electrical power (kW)	0.84	1.08	1.15
Current draw (Amps)	2.9	3.0	4.8
10 Amp 3 pin plug	Yes	Yes	Yes
Controller & temperature display	Electronic	Electronic	Electronic
Light switch on controller	Yes	Yes	Yes

Line Drawings







Ventilation required

ActiveCore[™] **Series** SKT

General Display

Upright fridges

Top mount design

Display and store food, drinks, and perishables, including flowers, chocolates, and wine.

All the great benefits of ultra-energy efficient ActiveCore technology, combined with lots of options not available in the standard TME and BME ranges. Customise your fridges perfectly to your space and enjoy quieter, cooler, cheaper refrigeration.



THIS FRIDGE CONTAINS: Easily removeable ActiveCore[™] cartridge





SKT500-X*



SKT650-A & SKT650-AC

SKT1000-A & SKT1000-AC

SKT1500-A & SKT1500-AC

Standard finishes: White, black, selected Dulux Powdercoat colour (exterior & interior colour combinations) & Stainless steel (exterior & interior) Standard models: 1, 2 & 3 glass door

*Does not contain ActiveCore cartridge



Coming Soon! ActiveCore 2 with R290 Natural Refrigerant and SKOPE-connect™ For ActiveCore 2 availability dates email skope@skope.com

Best Suited to:

??

Restaurants / Cafés

Quick Service Restaurants

 \ominus

Clubs / Pubs / Bars

m

Hospitality Venues

لحصا

Accommodation

╴┍

Medical / Aged Care

Schools

Convenience Stores

Quick Guide

ActiveCore^{••} Series SKT

Premium build qual Display & store -Food, drinks & peris ActiveCore[™] technol Market leading energy SKOPE premium co Solid & tropical doc

Full colour options

Remote available

Customisable

Standard Featu

SKOPE premium co

ActiveCore cartridg

Premium energy eff

Frameless glass do

SKOPE patented EZ

Bright LED lighting

Door lock tabs

Sign panel

Slotted back panel

Optimal airflow des

Low noise fan syste

Options

- Stainless steel •
- Full powdercoa
- Remote •
- Tropical heated ٠
- Solid door •
- Gen-3 series lo ٠ Barrel door loc •



ality	\oslash
ishables	\oslash
ology	Image: Second state Image: Second
ergy efficiency	${igodot}$
ontroller	\oslash
or options	\oslash
	\oslash
	\oslash
	${\boldsymbol{ \oslash}}$
ures	Benefits
ontroller	Easy to use with pre-programmed features
ge system	Maximum performance, minimal energy & easy servicing
fficient glass	Double Low-E equivalent
oor design	Modern appealing look
ZI-CLIP	Quick shelf set up & adjustment
3	Showcasing products inside
	Extra security
	Branding opportunities
	Chilled air directly onto products
sign	Minimal internal temperature variations
em	Quiet operation
l finish pat colour range	 Lit sign (AC models) Extra shelf & slides/clips Internal LED lighting (solid door)
d glass	Gravity feed shelving
OOK (double Low-E Argon) CKS	Internal shelf lightsStainless steel punched shelves

Specifications


Specifications	SKT500X	SKT65	jo-A	SKT10	000-A	
Fridge/Freezer - doors	Fridge - 1 Door	Fridge - 1	Door	Fridge - :	2 Doors	
Self Contained/Remote	Self Contained	Self Contained	Remote	Self Contained Rem		
Model ID	SKT500X	SKT650-A	SKT65or-A	SKT1000-A	SKT1000-/	
External						
Dimensions (W x D x H mm)	570 x 745 x 2200	740 x 745	X 2200	1130 x 74	5 X 2200	
Total floor area (m²)	0.43	0.55		0.		
Weight (kg)	140	170		225		
Door (solid/glass)	Glass	Glas			Glass	
Electronic controller	Yes	Yes		Ye	25	
Remote duty (Watts @ -5℃ SST)	N/A	N/A	585W	N/A	820W	
Breathes from / Expels air to	Upper front / top	Upper from	nt / top	Upper fr	ont / top	
Sign	Sign panel	Sign pa	anel	Sign panel		
Cabinet construction	Powdercoated steel	Powdercoa	ted steel	Powderco	ated steel	
Drainage (plumbing required)	No	No		N	lo	
Internal						
Gross volume (litres)	445	610)	98	30	
Lighting	1 x LED module	ı x LED n	nodule	2 x LED	module	
No. of shelves (per door)	5	5		5		
Shelf design	Plastic coated wire	Plastic coa	ted wire	Plastic coated wire		
Total shelf area (m²)	1.06	1.47	1	2.	86	
Product facings (600ml PET bottle)	30	40		7	0	
Performance						
MEPS category (M1-food & drinks, M2-drinks)	Mı	Mı		N	11	
MEPS efficiency (kWh/24h/m²) @ Climate Class 3	5.93	4.2	3	4.41		
Temperature range	1°C to 4°C	1°C to	4°C	ı°C t	o 4°C	
TEC (kWh/24h) @ Climate Class 3	3.13	3.10)	4.	65	
High efficiency model	Yes	Yes	i	Y	es	
Maximum ambient temperature*	40°C	43°(2	43	°C	
Climate Class rating 5		5			5	
Removable ActiveCore cartridge	No	Yes	;	Y	es	
Refrigerant / Charge	R134a / 370g	R134a / 380g	Specify	R134a / 380g	Specify	
Total display area (m²)	0.53	0.7	3	1.0	6	
Electrical						
Electrical power (kW)	0.72	0.84		0.96		
Current draw (Amps)	3	3-5		4		
10 Amp 3 pin plug	Yes	Yes	;	Yes		
Controller & temperature display	Electronic	Electro	onic	Electr	onic	
Light switch on controller	Yes	Yes		Ye	S	


SKT150	00-A
Fridge - 3	Doors
Self Contained	Remote
SKT1500-A	SKT1500-A
1705 x 745	
320	
Glas	s
Yes	
N/A	1190W
Upper fron	t / top
Sign pa	nel
Powdercoate	ed steel
No	
1497	
3 x LED m	odule
5	
Plastic coate	ed wire
4.38	
110	
Mı	
4.25	i
-00 +-	<u>،</u> ۹۲
1°C to .	
6.94 Yes	
43°C	
43 5	-
Yes	
R134a / 475g	Specify
1.63	
1.15	
4.8	
Yes	
Electro	nic


Yes

SKT ActiveCore specifications & line drawings


Line Drawings

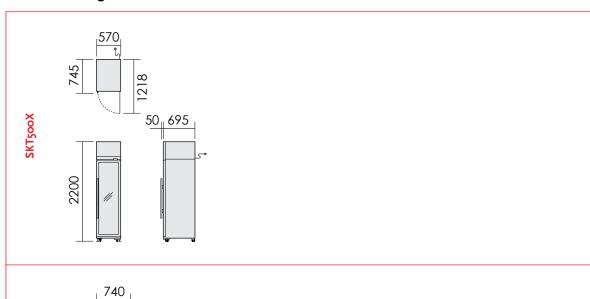





Line Drawings



Ventilation required

SKT ActiveCore specifications & line drawings

ActiveCore[™] **Series** SKB

General Display

Upright fridges

Bottom mount design

Display and store food, drinks, and perishables, including flowers, chocolates, and wine.

All the great benefits of ultra-energy efficient ActiveCore technology, combined with lots of options not available in the standard TME and BME ranges. Customise your fridges perfectly to your space and enjoy quieter, cooler, cheaper refrigeration.



THIS FRIDGE CONTAINS: Easily removeable ActiveCore[™] cartridge











SKB1200-A & SKB1200-AC

SKB1500-A & SKB1500-AC

Standard finishes: White, black, selected Dulux Powdercoat colour (exterior & interior colour combinations) & Stainless steel (exterior & interior) Standard models: 1, 2 & 3 glass door









Coming Soon! ActiveCore 2 with R290 Natural Refrigerant and SKOPE-connect™ For ActiveCore 2 availability dates email skope@skope.com

Best Suited to:

PR

Restaurants / Cafés

Quick Service Restaurants

Ð

Clubs / Pubs / Bars

m

Hospitality Venues

Accommodation

 $\left\{ \right\}$

Medical / Aged Care

Schools

Convenience Stores

Quick Guide

ActiveCore[™] Series SKB

Premium build qual Display & store -Food, drinks & peris ActiveCore[™] technol Market leading energy SKOPE premium co

Solid & tropical doc

Full colour options

Remote available Customisable

Standard Featu

SKOPE premium co ActiveCore - cartridg

Premium energy eff

Frameless glass do

SKOPE patented EZ **Bright LED lighting**

Door lock tabs

Sign panel

Slotted back panel

Optimal airflow des

Low noise fan syste

Options

- Stainless steel •
- Full powdercoa ٠
- Remote
- Tropical heated • Solid door ٠
- Barrel door loc .


ality	\oslash
ishables	\otimes
ology	Image: Second state sta
ergy efficiency	\oslash
ontroller	\oslash
or options	\oslash
	\oslash
	${\boldsymbol{\oslash}}$
	\odot
ures	Benefits
ontroller	Easy to use with pre-programmed features
ge system	Maximum performance, minimal energy & easy servicing
fficient glass	Double Low-E equivalent
oor design	Modern appealing look
ZI-CLIP	Quick shelf set up & adjustment
3	Showcasing products inside
	Extra security
	Branding opportunities
	Chilled air directly onto products
sign	Minimal internal temperature variations
em	Quiet operation
l finish	Lit sign (AC models)
at colour range	Extra shelf & slides/clipsInternal LED lighting (solid door)
d glass	Gravity feed shelving
cks	Internal shelf lightsStainless steel punched shelves

Specification


Specifications	SKB6	00-A	SKB900-A		SKB1200-A		
Fridge/Freezer - doors	Fridge -	1 Door	Fridge - 2 Doors		Fridge - 2 Doors		
Self Contained/Remote	Self Contained	Remote	Self Contained	Remote	Self Contained	Remote	
Model ID	SKB6	00-A	SKB9	00-A	SKB12	00-A	
External							
Dimensions (W x D x H mm)	740 x 795 x 200	05/2195 (AC)	1085 x 795 x 20	005/2195 (AC)	1280 x 795 x 20	005/2195 (AC)	
Total floor area (m²)	0.6	3	0.	86	1.0	8	
Weight (kg)	18	5	22	20	24	5	
Door (solid/glass)	Gla	SS	Gla	ISS	Gla	ISS	
Electronic controller	Ye	25	Y	<i>é</i> s	Y	es	
Remote duty	N/A	585W@-5⁰C	N/A	800₩@-5°C	N/A	900W@-5%	
Breathes from / Expels air to	Lower front /	Lower rear	Lower front	/ Lower rear	Lower front	Lower rear	
Sign	No S	ign	No	Sign	No Sign		
Cabinet construction	Powdercoa	ated steel	Powderco	ated steel	Powderco	ated steel	
Drainage (plumbing required)	No)	N	0	No		
Internal							
Gross volume (litres)	584	4	880		107	79	
Lighting	1 x LED r	nodule	2 x LED	module	2 x LED	module	
No. of shelves (per door)	5		5		5		
Shelf design	4 x Wire 8		4 x Wire		ح 4 x Wire & ۱ x S/S		
Total shelf area (m²)	1.6		2.9	•	3.00		
Product facings (600ml PET bottle)	45	5	6	0	8	D	
Performance							
MEPS category (M1-food & drinks, M2-drinks)	M	1	M	lı	N	lı	
MEPS efficiency (kWh/24h/m²) @ Climate Class 3	4.35		4.0	04	3.86		
Temperature range	1°C to 4°C		1°C to	o ₄°C	ı°C to ₄°C		
TEC (kWh/24h) @ Climate Class 3	3.0	5	3.9	3.97		4.55	
High efficiency model	Yes	s	Yes		Ye	es.	
Maximum ambient temperature*	43°	с	43	°C	43	°C	
Climate Class rating	5		5		5	5	
Removable ActiveCore cartridge	Ye	Yes Yes Yes		es			
Refrigerant / Charge	R134a / 380g	Specify	R134a / 380g	Specify	R134a / 380g	Specify	
Total display area (m²)	0.7		0.98		1.18		
Flortwind							
Electrical Electrical power (kW)							
Current draw (Amps)	0.84	tbc	1.08	tbc	1.08	tbc	
	3.5	tbc	4.5	tbc	4.5	tbc	
10 Amp 3 pin plug	Ye		Ye		Yes		
Controller & temperature display Light switch on controller	Electro		Elect	ronic	Elect	ronic	

IG40 × 795 × 005/2195IG40 × 795 × 005/2195	-
SKB Joo-A 1640 × 795 × 2005/2195 1.27 320 Glass Glass Yes N/A 1190W @ - 5°C Lower front / Lower rear No< Jgn Powdercoated steel No Powdercoated steel 1433 3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 78342 / 475g Specify	Remote
1640 x 795 x 2005/2195 1.27 320 Glass Yes N/A 1190W @ -5°C Lower front / Lower rear No Sign Powdercoted steel No 3 x LED 1433 3 x LED state 1433 3 x LED 1435 1437 1438 3 x LED No 1439 3 x LED No 1438 3 x LED No 10°C to 4°C 5.99 Yes 43°C 5.91 Yes R1342 / 475g	
1.27 320 Glass N/A 1190W @ -5°C N/A 1190W @ -5°C Lower front / Lower rear No No Sign No Powdercotd steel Steel No Sign 1433 3 x LED module 3 x LED module S 4 x Wire & 1 x S/S 3 95 S 1433 S 95 S 1435 S 1437 S 1438 S 1439 S	JOO- A
320 Glass Yes N/A 1190W@-5°C Lower front / Lower rear No Sign Powdercoated steel No Powdercoated steel A3× LED module 3× LED module 3× LED solute 3× S/S 3× S 3× S 3	x 2005/2195
Glass Yes N/A 1190W@-5°C Lower front / Lower rear No Sign Powdercatd steel No Powdercatd steel No 1433 3 x LED module 3 x XED module 3 x Xire & 1 x S/S 3 x LED module 3 x Yes 1 x S/S 1 x S/	27
N/A 1190W @ -5°C Lower front / Lower rear I No Sign I Powdercodd steel I Powdercodd steel I 1433 I 3 x LED module I 3 x LED module I 3 x LED module I 1433 I 1435 I 3 x LED module I S I 1430 I 1430 I 1431 I 1432 I 1433 I 1435 I 1436 I 1436	20
N/A 1190W @ -5°C Lower front / Lower rear No Sign No Sign Powdercated steel No 1433 3 x LED module 1433 3 x LED module 3.85 95 3.85 95 1437 1433 1433 1433 1433 1433 1433 1435 1437 1437 1437 1438 1438 1439 1438 1439 1438 1439 1439 1439 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439 1430 1439	ass
Lower front / Lower rear No Sign Powdercoated steel No 1433 3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 4 x Wire & 1 x S/S 3.85 95 1°C to 4°C 5.99 Yes 43°C 5 Yes R1344 / 475g Specify	s
No Sign Powdercoated steel No 1433 3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes R1344 / 475g	1190W @ -5%
Powdercoated steel No No 1433 3 x LED module 3 x LED module 3 x LED module 4 x Wire & 1 x S/S 3 .85 95 4 x Wire & 1 x S/S 3 .85 95 4 x Wire & 1 x S/S 3 .85 95 4 x Wire & 1 x S/S 3 .85 95 4 x Wire & 1 x S/S 3 .85 95 4 x Wire & 1 x S/S 100 100 100 100 100 100 100 100 100 10	/ Lower rear
No 1433 3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 95 1°C to 4°C 5.99 Yes 43°C 5 Yes 7342 / 475g Specify	Sign
1433 3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes Specify	ated steel
3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 43°C 55 Yes R1344 / 475g Specify	lo
3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 43°C 55 Yes R1344 / 475g Specify	
3 x LED module 5 4 x Wire & 1 x S/S 3.85 95 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 43°C 55 Yes R1344 / 475g Specify	33
5 4 x Wire & 1 x S/S 3.85 95 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes R134a / 475g Specify	
4 x Wire & 1 x S/S 3.85 95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes Yes R134a / 475g Specify	
95 M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes Yes R1342 / 475g Specify	
M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes R1342 / 475g Specify	85
M1 4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes R1342 / 475g Specify	95
4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes R134a / 475g Specify	
4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes R134a / 475g Specify	
4.05 1°C to 4°C 5.99 Yes 43°C 5 Yes R134a / 475g Specify	/ 1
1°C to 4°C 5:99 Yes 43°C 5 Yes R134a / 475g	
5-99 Yes 43°C 5 Yes R134a / 475g Specify	05
Yes 43°C 5 Yes R134a / 475g Specify	o 4°C
43°C 5 Yes R134a / 475g Specify	99
5 Yes R134a / 475g Specify	25
Yes R134a / 475g Specify	°C
R134a / 475g Specify	5
	25
1.48	Specify
	48
	tbc
1.15 tbc	tbc
	es
4.8 tbc	ronic

SKB ActiveCore specifications & line drawings

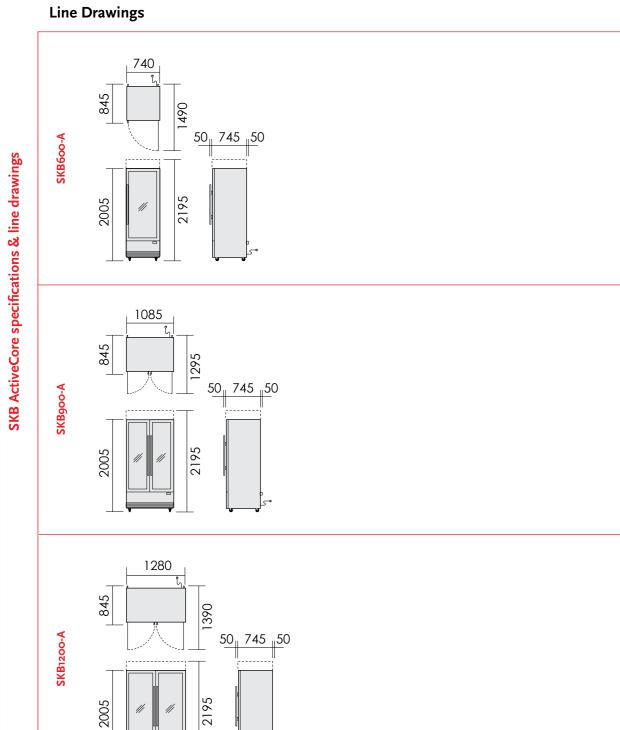

Line Drawings



Ventilation required



ActiveCore 2


meet the new generation of cool







skope.com/activecore



New Zealand

SKOPE Industries Limited 57 Princess Street PO Box 1091 Christchurch 8140 New Zealand International Tel: +64 (3) 983 3800

Customer Services

Australia

Freephone: 1800 121 535 Email: skope@skope.com

New Zealand

Freephone: 0800 947 5673 Email: skope@skope.com

