

specifications


RF7.UPF.1.SD

ReFlex Series, 1 Door (Solid), Upright Freezer

SKOPE®
Refrigeration

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

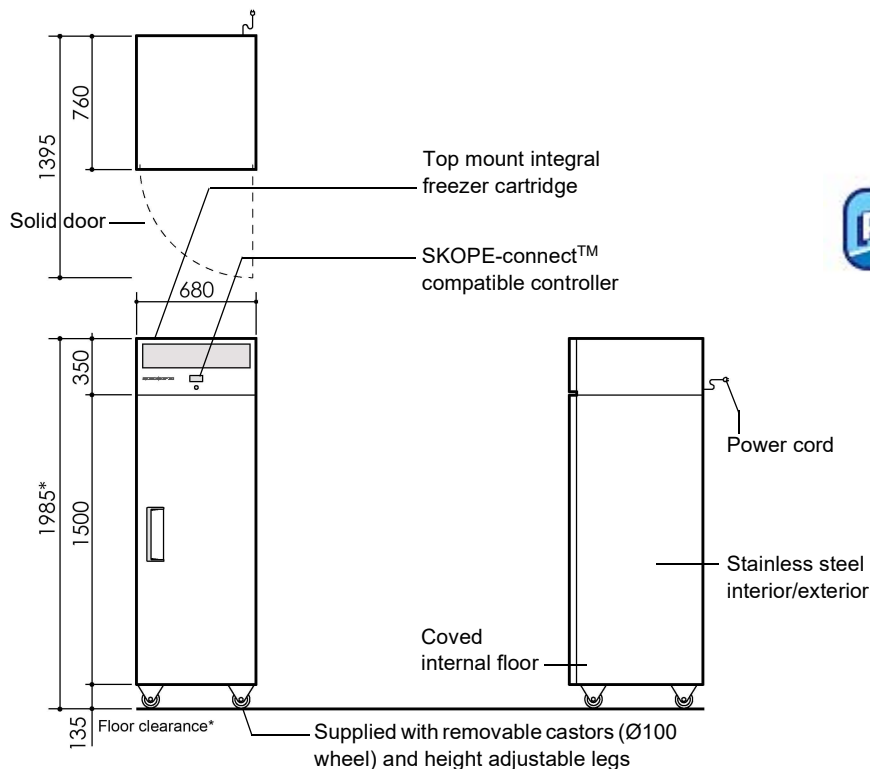

CABINET

Doors	1 × self-closing, lockable, reversible, solid swing door. Supplied RH
Internal door opening	1 × door openings: 1375mm high × 555mm wide
Shelves	5 × adjustable height shelves: 540mm wide × 530mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	-21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)
GEMS class	5L1
GEMS energy consumption	7.40 kWh/24h
GEMS annual running cost	\$811 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	5
Interior lighting	1 × 1200mm, 12W LED light (door activated)
Power cord	Supplied with 2.3m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	4.0 Amps (includes unit 3.9 Amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable freezer cartridge (part number UTKDNI-0019)
Refrigerant	R290 / 94g (natural refrigerant)
Nominal capacity	550 Watts
Heat rejection (Avg/peak)	310 Watts/430 Watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	1985mm*	1395mm
Width	680mm	560mm
Depth	760mm	600mm
Floor area	0.52m ²	
Weight	122kg	
Gross volume	469L	
Net volume	363L	

* With supplied castors fitted. See height variation below

Height variation

Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions		Overall cabinet dimensions	
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
Length of multiple cabinets			
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements

Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0590 Rev. 2.21 Aug. 2020

