

turbofan®

Technical data sheet for

E23M3 ON THE SK23 STAND

Half Size Manual / Electric Convection Oven
on a Stainless Steel Stand



E23M3

Unit shall be a Moffat electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Oven shall have capacity for three half size sheet pans. The oven shall have 2.8kW heating elements. The oven shall have a bi-directional single reversing fan system. The oven shall be controlled by a mechanical thermostat with a range of 50-260°C, a 60 minute bake timer, and feature a single halogen oven lamp. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK23. Oven shall be fitted with a 15A plug-in cordset. Unit shall be supplied in 100% recyclable shipping packaging.

SK23

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for half size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E22M2 and E23M3. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 3 460mm x 330mm / 18" x 13" half size sheet pan capacity
- 3 GN 2/3 pan capacity
- 85mm tray spacing
- Compact 610mm width
- Bi-directional reversing fan system
- 2.8kW heating power
- 15A plug-in cordset fitted
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Mechanical thermostat 50-260°C
- 60 minute timer with time up alarm
- Halogen oven lamp
- Dia. 180mm full stainless steel oven fan
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 3 oven wire racks supplied
- 100% recyclable packaging

ACCESSORIES

- Turbofan SK23 Oven Stand

turbofan®

E23M3 Half Size Manual / Electric Convection Oven on a Stainless Steel Stand

CONSTRUCTION

- Vitreous enameled fully welded oven chamber
- Stainless steel front, sides and top exterior
- Stainless steel oven fan baffle and oven vent
- Removable 3 position chrome plated wire side racks
- Oven racks chrome plated wire (3 supplied)
- Stainless steel frame drop down hinged door
- 5mm thick door outer glass
- 5mm thick low energy loss door inner glass
- Heavy-duty counterbalanced door hinges
- Wear resistant powder coated welded door handle
- Stainless steel control panel
- Aluminised coated steel base and rear panels

CONTROLS

- Power ON control panel indicator
- Mechanical thermostat 50-260°C
- Heating ON control panel indicator
- Manual 60 minute timer
- Time-Up control panel indicator and buzzer
- Over-temperature safety cut-out

CLEANING

- Stainless steel top and sides continuous exterior panel
- Vitreous enameled oven chamber
- Fully removable chrome plated oven side racks
- Removable stainless steel oven fan baffle
- Full stainless steel oven fan
- Easy clean door system with hinge out door inner glass (no tools required)
- Removable plug-in oven door seal (no tools required)
- 76mm high stainless steel feet for easy access underside

SPECIFICATIONS

- Electrical Requirements
- 230-240V, 50Hz, 1P+N+E, 3kW, 12A
- 15A cordset fitted
- External Dimensions
- Width 610mm
- Height 607mm including 76mm feet
- Depth 642mm
- Oven Internal Dimensions
- Width 495mm
- Height 305mm
- Depth 340mm
- Volume 0.51m3

Oven Rack Dimensions

- Width 460mm
- Depth 330mm
- Nett Weight (E23M3) 42.4kg

Packing Data (E23M3)

- 54.6kg
- 0.34m3
- Width 750mm
- Height 705mm
- Depth 635mm

SK23 Stainless Steel Stand

- All stainless steel welded frame oven stand for Turbofan E22 and E23 Series ovens
- 6 position tray runners standard
- 4 76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel lock
- Welded 38mm and 32mm square tube front and rear frames
- Welded rack supports/side frames
- Top frame oven supports suit Turbofan E22 and E23 Series oven mounting
- Supplied CKD for assembly on site

External Dimensions (SK23 Oven Stand)

- Width 610mm
- Height 880mm
- Depth 530mm

Nett Weight (SK23 Oven Stand)


- 16kg
- Packing Data (SK23 Oven Stand)
- 18kg
- 0.09m3
- Width 630mm
- Height 900mm
- Depth 152mm

INSTALLATION CLEARANCES

- Rear 25mm
- LH Side 25mm
- RH Side 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

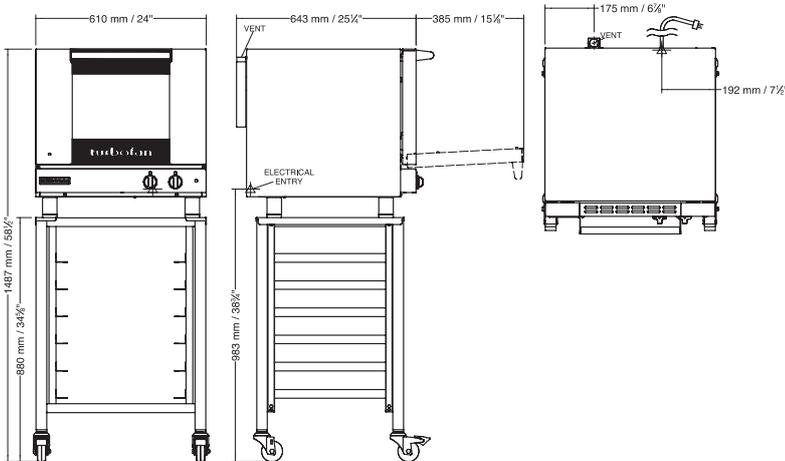

an Ali Group Company



The Spirit of Excellence

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au