specifications



CL800-4SW


Counterline, 4 Door (Swing), Integral Fridge

680 545 Mains flex

CABINET DIMENSIONS

External Internal Height 725mm* 545mm Width 2820m 2340mm 680mm** Depth 565mm 1.92m² Floor area

Gross volume 810L Height excludes castors, legs or optional

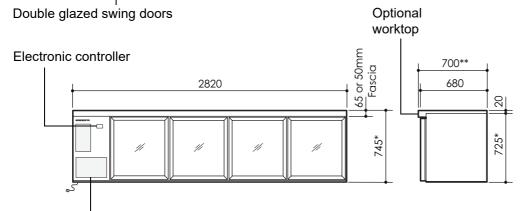

Side mounted integral refrigeration unit

CABINET SPECIFICATIONS

Self-closing, double glazed, toughened Low-E safety glass with aluminium **Doors**

extrusion or insulated solid doors

Internal door opening size 4 door openings: 544mm high x 520mm wide

Shelves Adjustable height, white plastic coated, steel wire shelves - two per door

Worktop (optional) Optional 20mm high stainless steel worktop with 65mm (or 50mm) fascia

Electrical safety climate class 5

Internal lighting 2 x 20W T8 Frosted LED Tube (Ø26 x 900mm, 5500K) - Switched

Electrical 230-240 Volts a.c. 50 Hz, single phase supply, 3.8 Amps

Temperature range +1°C to +4°C

GEMS class M1

GEMS energy consumption 8.57 kWh/24h

GEMS annual running cost \$939 p.a. (@ \$0.30/kWh)

Refrigeration system Side mounted, integral refrigeration unit (UE21AAC-171ZC)

Electronic controller SKOPE CAREL ir33

Refrigerant R134a / 425 g **Nominal capacity** 737 Watts

Insulation 42mm polyurethane foam

Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2003 SKOPE Industries Limited



^{**}Depth with optional worktop is 700mm