

Modular Cooking Range Line 900XP 8-Burner Gas Range on 2 Gas Ovens



391272 (E9GCGP8CGA)

8-Burner (2x10 kW, 6x6 kW)
gas Range on 2 gas Oven
(8,5 kW each) - AGA - Aus

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPX5 water protection.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Protected pilot light.
- The special design of the control knob system guarantees against water infiltration.
- Base compartment consists of two gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed cast iron base plate.
- Burners with optimized combustion.
- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- Oven thermostat adjustable from 120 °C to 280 °C.
- 40 mm thick oven door for heat insulation.
- The six 6 kW and two 10 kW high efficiency burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers:
 - 60 mm burners with continuous power regulation from 1,5 to 6 kW
 - 100 mm burners with continuous power regulation from 2.2 kW to 10 kW

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- AISI 304 stainless steel worktop, 2mm thick.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 930 mm deep to give a larger working surface area.

Optional Accessories

- GN2/1 chrome grid for static oven ☐ PNC 164250
- Junction sealing kit ☐ PNC 206086
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels ☐ PNC 206135



APPROVAL: _____

- Flanged feet kit PNC 206136
□
- Frontal kicking strip for concrete installation, 1600mm PNC 206152
□
- Pair of side kicking strips for concrete installation PNC 206157
□
- Single burner radiant plate for pan support PNC 206170
□
- Single burner ribbed plate for direct cooking - fits frontal burners only PNC 206172
□
- Frontal kicking strip, 1600mm (not for refr-freezer base) PNC 206179
□
- Pair of side kicking strips (not for refr-freezer base) PNC 206180
□
- 2 panels for service duct for single installation PNC 206181 □
- 2 panels for service duct for back to back installation PNC 206202
□
- Kit 4 feet for concrete installation (not for 900 line free standing grill) PNC 206210
□
- Water column with swivel arm (water column extension not included) PNC 206289
□
- Water column extension for 900 line PNC 206290
□
- Stainless steel double grid for 2 burners PNC 206298
□
- Wok pan support for open burners (700/900) PNC 206363
□
- Base support for feet or wheels - 1600mm (700/900) PNC 206369
□
- Base support for feet or wheels - 2000mm (700/900) PNC 206370
□
- Chimney grid net, 400mm (700XP/900) PNC 206400
□
- Side handrail-right/left hand (900XP) PNC 216044
□
- Frontal handrail, 1600mm PNC 216050
□
- 2 side covering panels for free standing appliances PNC 216134 □
- Pressure regulator for gas units PNC 927225
□




**WA DEALER
 PRACTICAL PRODUCTS PTY LTD**

**PH: 08 9302 1299
 51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au**

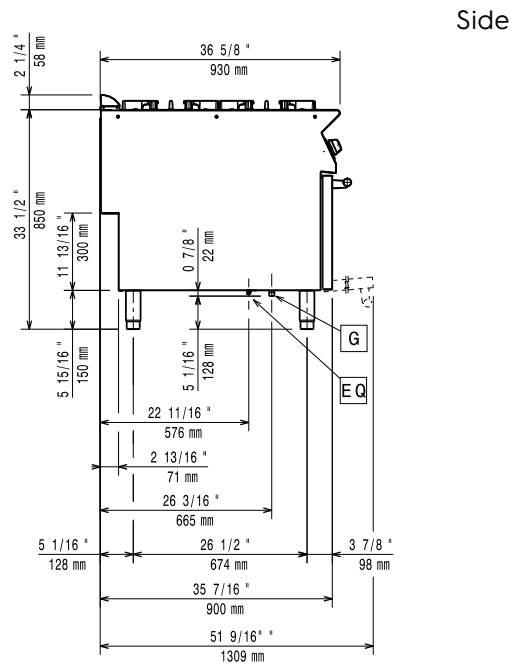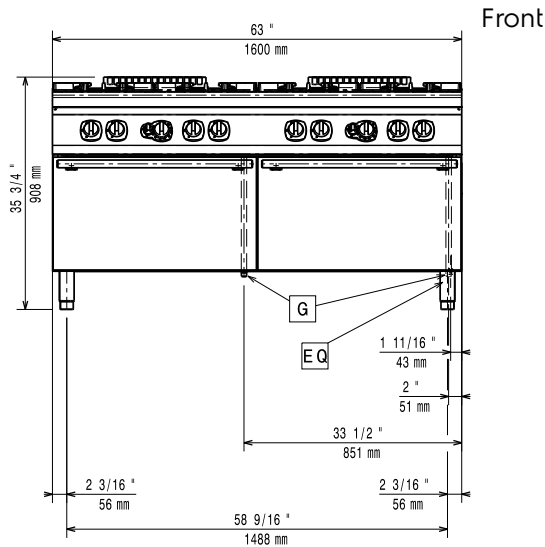

G = Gas connection

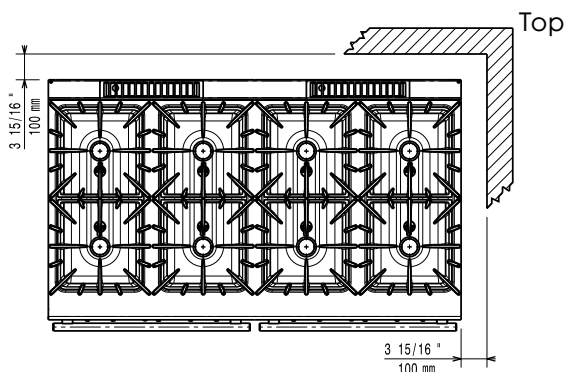

Gas

Gas Power:

391272 (E9GCGP8CGA) 73 kW

Standard gas delivery:

Natural Gas G20 (20mbar)

Gas Type Option:

LPG; Natural Gas

Gas Inlet:

1/2"

Key Information:

Front Burners Power:

6 - 6 kW

Back Burners Power:

10 - 10 kW

Back Burners Dimension - mm

Ø 100 Ø 100

Front Burners Dimension - mm

Ø 60 Ø 60

Oven working Temperature:

120 °C MIN; 280 °C MAX

Oven Cavity Dimensions (width):

575 mm

Oven Cavity Dimensions (height):

300 mm

Oven Cavity Dimensions (depth):

700 mm

Net weight:

300 kg

Shipping weight:

350 kg

Shipping height:

1030 mm

Shipping width:

1780 mm

Shipping depth:

1020 mm

Shipping volume:

1.87 m³

Certification group:

N9CG

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
 51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au