

CR9C

900mm Four Burner/Griddle Gas Range Static Oven



CR9C

Also Available



CR9A

CR9B

CR9D

- 900mm wide
- 4 open burners
- 300mm griddle plate
- 22MJ open burner rating
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners
- Cast iron burners and vitreous enamel potstands
- 1 griddle burner with pilot, flame failure and piezo ignition
- Griddle plate machine finished 12mm thickness
- High crown static oven
- Capacity for one 2/1 GN or two 1/1 GN pans on oven rack
- Manual pilot ignition
- French door system
- Vitreous enameled oven liner
- Adjustable front feet and rear rollers
- Stainless steel finish
- Fully modular

OVERALL CONSTRUCTION

Cooktop

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- Vitreous enamelled control panel
- 12mm machined surface mild steel griddle plates
- Stainless steel front, sides and splashback
- Griddle section standard on RH side only

Oven

- Vitreous enamelled oven liner
- Extra wide GN 2/1 capacity with 4 position racking
- Supplied with one chrome plated oven rack
- Vitreous enamelled oven spill tray
- Stainless steel doors and sides
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear

CONTROLS

Cooktop

- Large easy use control knobs
- Variable high to low controls to open and griddle burners
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners
- Griddles standard with pilot, flame failure and piezo ignition

Oven

- 100-310°C thermostatic oven control
- Piezo ignition to oven pilot burner with flame failure

CLEANING AND SERVICING

- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Stainless steel removable spill trays
- Stainless steel grease trays on griddles
- Access to all parts from front of unit

Matching Products



CW2H

CSP6

CN4

CT9

CW3H


CW1H

CP4

CS9 / C900-S

CR9C

900mm Four Burner/Griddle Gas Range Static Oven

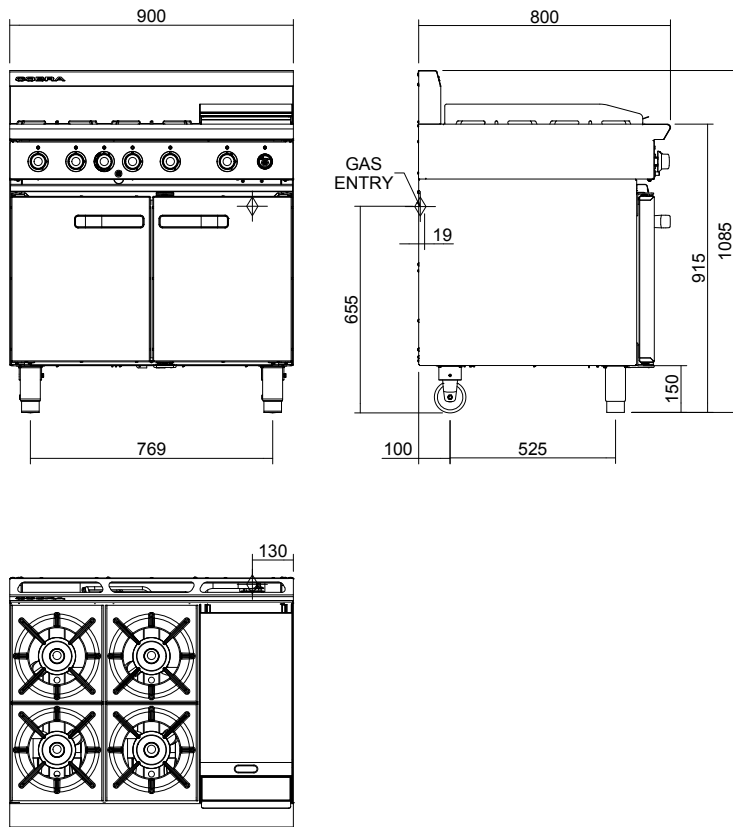

CR9C

SPECIFICATIONS

Burners

Open Burners;
22MJ/hr, 5.5kW each

Griddle Burners;
20MJ/hr, 5.0kW per 300mm section

Oven; 28MJ/hr, 7.8kW

Gas power (gross)
CR9C 136MJ/hr, 37.8kW

Oven dimensions

Width 760mm

Depth 615mm

Height 365mm

Rack size

750mm x 590mm

Rack positions 4

Gas connection

R 3/4 (BSP) male
130mm from RH side, 20mm from
rear, and 655mm from floor

Dimensions

Width 900mm

Depth 800mm

Height 915mm

Incl. splashback 1085mm

Nett weight

127.5kg

Packing data

1.21m³, 168kg

Width 1010mm

Depth 955mm

Height 1250mm

Gas types

Available in Natural gas and LP gas,
please specify when ordering
Other gas types on request



Cert. No. AGA 7225G

an Ali Group Company



The Spirit of Excellence



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au