

# Storage & Merchandising Chest Freezers with Low Energy Consumption



BD-650



SD-620P

2 YEARS WARRANTY ON ALL PARTS AND LABOUR  
EXTRA 2 YEARS WARRANTY ON PARTS WHEN YOU REGISTER WITH US ONLINE



SOLID DOOR & SLIDING TOP CHEST FREEZER

## FEATURES

### BD-450 | BD-550 | BD-650

- Stainless steel top
- Low energy consumption
- 70mm thickness insulation
- Manual defrost
- Defrost water drain hole
- Recess handle on front side
- Environmentally friendly
- Castors included

## FEATURES

### SD-420P | SD-520P | SD-620P


- Sliding glass lids
- Fully automatic operation
- 75mm thickness insulation
- Exterior white finish
- Aluminum door frame
- Adjustable thermostat
- Main power indicator
- Defrost water drain hole
- Baskets included
- Interior LED light as standard
- Four castor wheels
- Environmentally friendly



BD-450

BD-550

BD-650

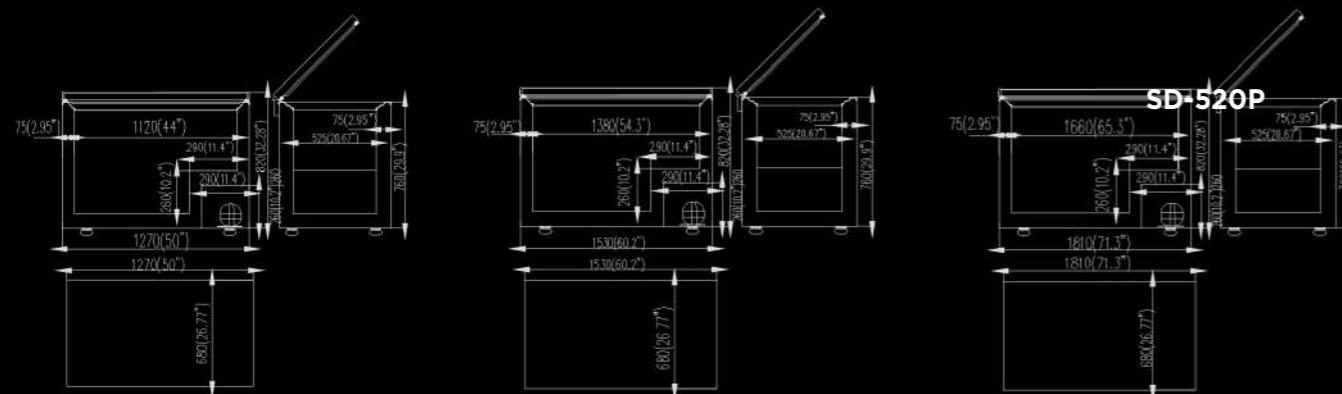

SD-420P

4 Baskets

SD-520P


5 Baskets

SD-620P

6 Baskets

WA DEALER  
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au



BD-450

Capacity	358L
Power	69W
Voltage	220-240V/50Hz
Working Temp	-18°C
Ambient Temp	43°C
Dimensions (mm)	W1270 x D755 x H840
Packaging Dimensions (mm)	W1320 x D780x H890




BD-550

Capacity	450L
Power	71W
Voltage	220-240V/50Hz
Working Temp	-18°C
Ambient Temp	43°C
Dimensions (mm)	W1530 x D755 x H840
Packaging Dimensions (mm)	W1580 x D780x H890



BD-650

Capacity	560L
Power	98W
Voltage	220-240V/50Hz
Working Temp	-18°C
Ambient Temp	43°C
Dimensions (mm)	W1810 x D755 x H840
Packaging Dimensions (mm)	W1860 x D780x H890



SD-420P

Capacity	355L
Power	210W
Voltage	220-240V/50Hz
Working Temp	-18°C
Ambient Temp	43°C
Dimensions (mm)	W1270 x D680 x H850
Packaging Dimensions (mm)	W1320 x D780x H890



SD-520P

Capacity	445L
Power	248W
Voltage	220-240V/50Hz
Working Temp	-18°C
Ambient Temp	43°C
Dimensions (mm)	W1530 x D680 x H850
Packaging Dimensions (mm)	W1580 x D780x H890



SD-620P

Capacity	545L
Power	252W
Voltage	220-240V/50Hz
Working Temp	-18°C
Ambient Temp	43°C
Dimensions (mm)	W1810 x D680 x H850
Packaging Dimensions (mm)	W1860 x D780x H890