

# Stylish Slimline Cooling with Unmatched Durability



YPF9020  
YPF9025



YPF9030  
YPF9035



YPF9040  
YPF9045


2 YEARS WARRANTY ON ALL PARTS AND LABOUR  
EXTRA 2 YEARS WARRANTY ON PARTS WHEN YOU REGISTER WITH US ONLINE






COMPACT UNDERCOUNTER REFRIGERATORS / FREEZERS

## FEATURES




- Stainless steel interior and exterior with galvanised back panel
- Gas: R134A for Fridges
- Insulation Foam: C5H10,ODP, Zero emissions
- 40°C ambient working temperature
- Castors as standard
- European parts, Embraco compressor, EBM fan motor
- Fan-Forced Cooling
- Auto-defrost function
- Carel or Dixell digital controller
- One shelf per door

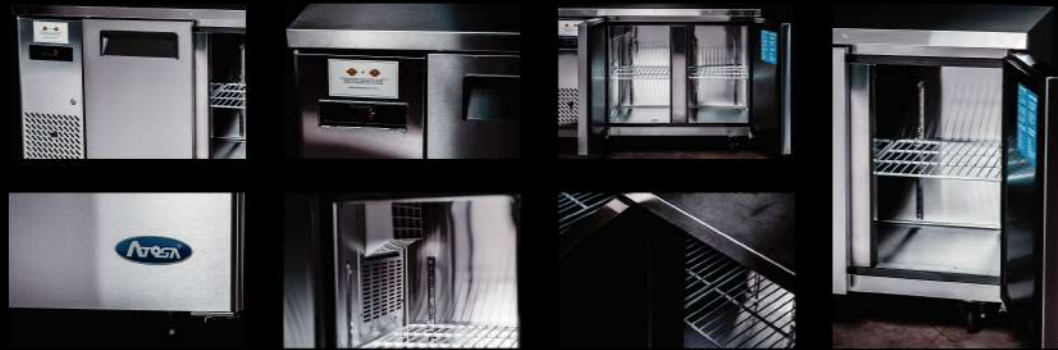





YPF9020  
YPF9025



YPF9030  
YPF9035




YPF9040  
YPF9045

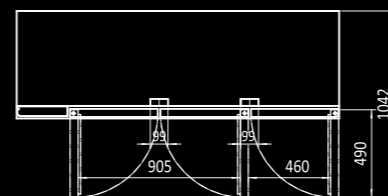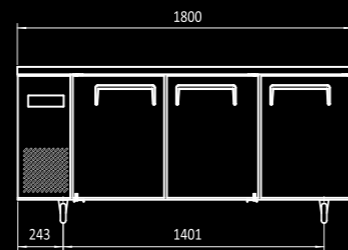


**YPF9020**

Capacity	220L
Power	300W/400W
Voltage	220-240V/50Hz
Working Temp	-2°C-+8°C
Ambient Temp	40°C
Dimensions (mm)	W1200 x D600 x H838,71kg
Packaging Dimensions (mm)	W1254 x D654 x H867,86kg




**YPF9025**

Capacity	220L
Power	300W/400W
Voltage	220-240V/50Hz
Working Temp	-22°C--17°C
Ambient Temp	40°C
Dimensions (mm)	W1200 x D600 x H838,71kg
Packaging Dimensions (mm)	W1254 x D654 x H867,86kg




**YPF9030**

Capacity	300L
Power	350W/450W
Voltage	220-240V/50Hz
Working Temp	-2°C-+8°C
Ambient Temp	40°C
Dimensions (mm)	W1500 x D600 x H838,74kg
Packaging Dimensions (mm)	W1554 x D654 x H867,100kg




**YPF9035**

Capacity	300L
Power	350W/450W
Voltage	220-240V/50Hz
Working Temp	-22°C--17°C
Ambient Temp	40°C
Dimensions (mm)	W1500 x D600 x H838,74kg
Packaging Dimensions (mm)	W1554 x D654 x H867,100kg



**YPF9040**

Capacity	390L
Power	400W/550W
Voltage	220-240V/50Hz
Working Temp	-2°C-+8°C
Ambient Temp	40°C
Dimensions (mm)	W1800 x D600 x H838,81kg
Packaging Dimensions (mm)	W1854 x D654 x H867,111kg



**YPF9045**

Capacity	390L
Power	400W/550W
Voltage	220-240V/50Hz
Working Temp	-22°C--17°C
Ambient Temp	40°C
Dimensions (mm)	W1800 x D600 x H838,81kg
Packaging Dimensions (mm)	W1854 x D654 x H867,111kg