

Sapiens®
reloaded

Blue Seal Electric Combi Steamer

SAPIENS RELOADED E20RSDW 20 x 1/1 GN or 10 x 2/1 GN



- Manual controls
- Multi-point core temperature probe
- Variable fan speed with up to 6 speeds
- 95 preset recipe programs, including programs for reheating on the plate / pan
- 99 free programs, up to 9 cycles with name and icon creation
- AUTOCLIMA automatic system for measuring and controlling the humidity in the cooking chamber
- Fast-Dry, quick dehumidification of the cooking chamber
- LED HVS alphanumeric display for temperature, Autoclimate, time and core temperature
- 2.4" LCD – TFT colour display for favourite programs, pre-set programs, fan, automatic washing, menus and settings.
- Rapid selection scroller knob for program using scroll & push functions
- LED bars to indication actual cooking cycles in program mode
- Manual pre-heating
- Electronic thermostat 30°C-300°C
- Auto reverse (automatic reversing fan rotation) for perfect cooking uniformity
- Automatically regulated steam condensation
- Manual chamber pressure relief control
- Manual humidifier
- ECOVAPOR – automatic control of the system saturation in the cooking chamber
- ECOSPEED – oven optimises and controls the delivery of energy to maintain correct cooking temperature
- Automatic LCS (Liquid Clean System) with built-in tank and automatic dispensing
- Built-in retractable hand shower with tap
- USB connection to download HACCP data, software updates and storing cooking programs

GENERAL FEATURES

- Direct Steam injection system
- Perfectly smooth, water tight chamber
- Double tempered glass door with air chamber and interior heat-reflecting glass reduces head radiation towards operator
- Hinged inner glass for easy cleaning
- Adjustable door hinge for optimal seal
- Fan motor thermic protection
- Low water alarm
- Component cooling system with overheat display control
- Self-diagnosis and fault display
- Oven light
- PX5 spray-proof and hose proof

OPTIONAL FEATURES

- Right hinged door
- Configuration for connection to extraction hood



Blue Seal Electric Combi Steamer SAPIENS RELOADED E20RSDW 20 x 1/1 GN or 10 x 2/1 GN

Dimensions

| | |
|--------|--------|
| Width | 1170mm |
| Depth | 895mm |
| Height | 1040mm |
| Weight | 201kg |

Packed dimensions

| | |
|--------|--------|
| Width | 1220mm |
| Depth | 1040mm |
| Height | 1250mm |
| Weight | 226kg |

Shelves

| | |
|----------------|------|
| 1/1 GN | 20 |
| 2/1 GN | 10 |
| Shelf Spacings | 70mm |

Installation requirements

(for precise installation instructions, please refer to the unit's installation manual).

Power connection requirements

Multi pole circuit breaker and all pole disconnection isolator switch installed near the appliance.

Supply line voltage

400-415V ~ 50Hz, 3P+N+E

Special voltage options available on request.

Power connection

| | |
|--------------------------|----|
| Total (kW) | 31 |
| Convection power (kW) | 30 |
| Rated Current (A) (400V) | 46 |

Installation clearances

| | |
|---------|--------|
| - rear | 25mm |
| - right | 500mm* |
| - left | 50mm |

*Clearance required on fixed installations for service accessibility.


If heat sources are located near the RH side of the Sapiens combi, ensure that a minimum distance of 400mm is maintained.

Install in accordance with local body regulations only on horizontal surfaces and not against combustible walls.

Water connection requirements

- Cold water
- Flow pressure (200-500kPa)
- Soft water connection*
- Shut-off valve with return flow inhibitor and dirt filter
- Water supply R³/₄
- R50 waste water connection

(*Water softener may be required. Please refer to installation manual for water treatment values.)

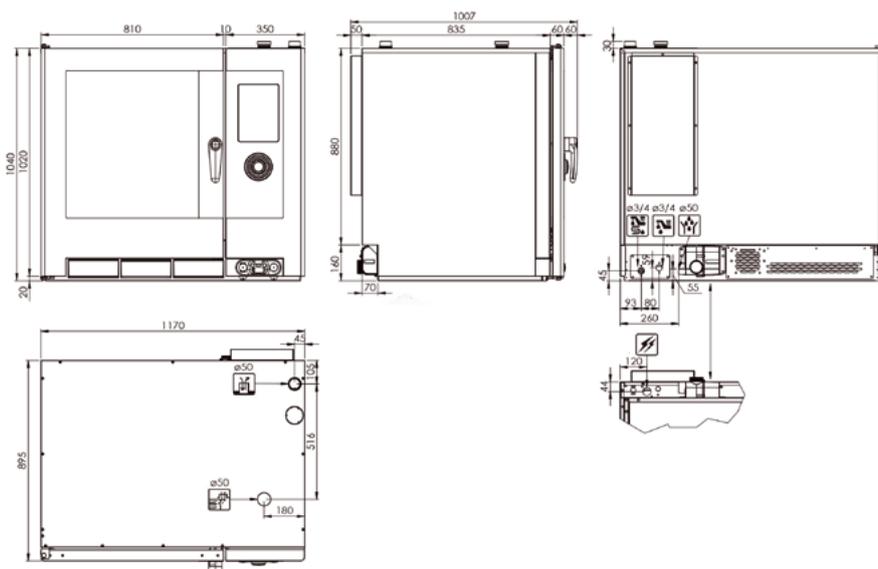

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au