

GM0690LB

BROMIC
REFRIGERATION



Flat Glass Door 690L LED Display Fridge

| Vertical Display & Storage

Self-closing doors
minimise temperature
loss and increases
product efficiency

High-impact internal
lighting, for superior
product presentation

Adjustable shelving
for flexibility in
display configuration

Lockable castors
make movement and
placement easy

Powerful fan for even
circulation of cold air

High-impact LED lighting
and customizable lightbox
capture attention

Double-glazed Low-E safety
glass doors increase energy
efficiency and reduce
condensation. Ideal for
humid and tropical regions

High-density
polyurethane insulation
keeps temperature and
energy consumption low


Colourbond interior
makes cleaning
simple and hassle free

Adjustable thermostat
for accurate temperature
maintenance



Flat Glass Door 690L LED Display Fridge

| Vertical Display & Storage

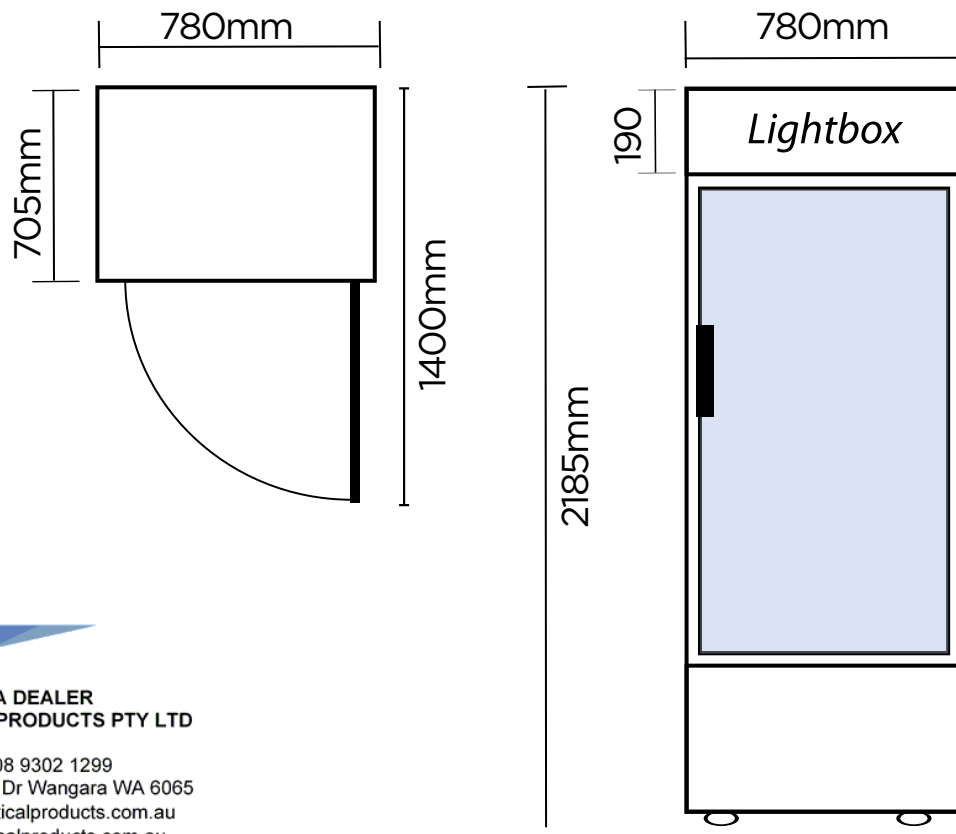

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
 51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

SPECIFICATIONS

Model Number	GM0690LB
Part Number	3736222
Volume	659L
Unit Weight	123kg
Packaged Weight	128kg
Adjustable Temp. Range	+1°C to +5°C
Max. Ambient Temp.	43°C
Climate Class	3M1
Energy Consumption	3.995kWh/24h
GEMS Star Rating	7 stars
Refrigeration Capacity	485W
Refrigerant	R290
Rated Current	3.8A
Electrical Voltage	220-240V
Frequency	50Hz
Power Supply	Single Phase
Power Plug	1 x 10A
Plug Location	Bottom right

Colour	Black
Display Light Box	Yes
Internal Light	LED
No. of Doors	1
Door Type	Glass
Door Glass Type	Double glazed
Door Style	Hinged
Door Shape	Flat
Door Swing Dimension	695mm
Total Depth of door open	1400mm
Self-Closing Door	Yes
Door Lock	No
No. of Shelves incl Base	6
Shelf Type	Fixed
Shelves Dimensions	466(w) x 214(d) mm
Temp. Controller	Digital
Castors	Yes
Warranty	2 Years Bromic Extra Care Warranty - Labour and Parts

DIMENSIONS

	External (mm)
Width	780
Depth	705
Height	2185
	Internal (mm)
Width	702
Depth	555
Height	1682
	Packaged (mm)
Width	870
Depth	750
Height	2200