

COBRA®

YOUR STYLE, YOUR WAY

CN4

450mm Single Pan Gas Noodle Cooker



CN4

- High performance single pan noodle cooker
- Patented infra-red burner system
- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Integrated water fill and starch skimming water faucet
- Five stainless steel noodle baskets supplied
- Hinged basket drain tray
- Safety cut-out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular

OVERALL CONSTRUCTION

- Pan 1.5mm 316 stainless steel
- Stainless steel front, sides and splashback
- Vitreous enamelled control panel
- Double skin door with stainless exterior
- 25mm (1") skimming overflow and pan drain valve
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear
- Five 304 stainless steel baskets
- 304 stainless steel basket support tray in pan

CONTROLS

- Large easy to use knob - heat resistant reinforced
- Variable high boil to standby simmer burner control
- Fine adjustment water faucet for pan filling and water refreshing/starch skimming
- Pan protection safety cut-out thermostat
- Millivolt gas valve system (no electrical supply)
- Flame failure protection on pilot
- Piezo ignition to standing pilot burner

CLEANING AND SERVICING

- Open stainless steel pan for easy clean
- Hinged basket drain tray
- Removable basket support tray
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Matching Products



CW2H



CSP6



CT9



CW3H



CW1H



CP4



CS9 / C900-S




C6B

COBRA®

YOUR STYLE, YOUR WAY

CN4

450mm Single Pan Gas Noodle Cooker

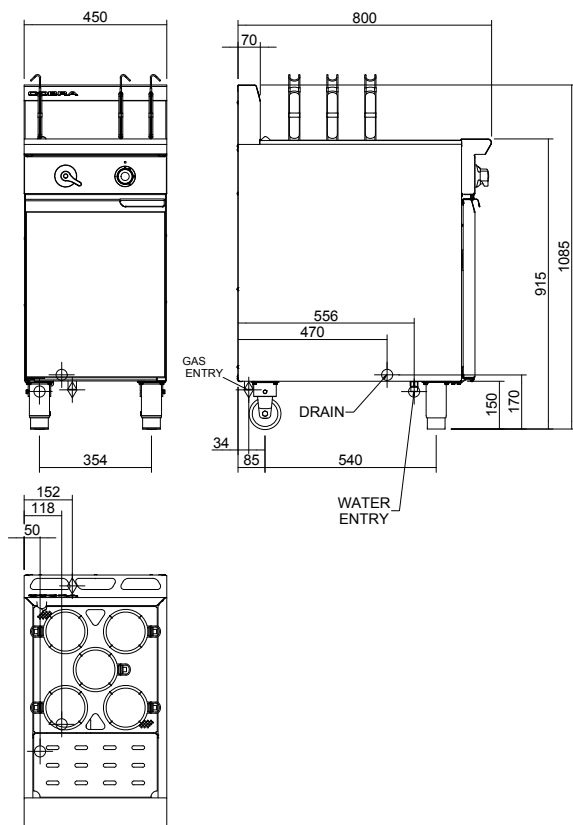

CN4

SPECIFICATIONS

Pan size
Water capacity 40L
Width 365mm
Length 405mm
Basket immersion depth 130mm
Baskets
5 stainless steel baskets
dia 140mm x 150mm deep
Stainless steel basket support tray
Burners
1 x infra-red burner
Gas power (gross)
47MJ/hr, 13kW Natural gas
46MJ/hr, 12.8kW LP gas
Gas connection
R 3/4 (BSP) male
50mm from left hand side,
34mm from rear and 140mm
from floor

Water connection
Cold water connection 50mm
from left hand side, 556mm
from rear and 140mm from floor
R1/2 (BSP) male
Drain connection
Drain must be connected to
system suitable for boiling
water discharge 1" BSP Male
connection 118mm from
left hand side, 470mm from rear,
and 170mm from floor
Dimensions
Width 450mm
Depth 800mm
Height 915mm
Incl. splashback 1085mm
Nett weight
78kg

Packing data
0.587m3, 95.5kg
Width 900mm
Depth 520mm
Height 1255mm

Gas types
Available in Natural gas and
LP gas, please specify when
ordering
Other gas types on request

Options
Side splash guards
Joining caps



ISO9001
Quality
Management
Standard



Cert. No. AGA 6878G

In line with policy to continually develop
and improve its products, Moffat
Limited reserves the right to change
specifications and design without
notice.

© Copyright Moffat Ltd
AN.C.01.19 / 1598

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au