

CP4

450mm Single Pan Gas Pasta Cooker



CP4

- High performance single pan pasta cooker
- Patented infra-red burner system
- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Integrated water fill and starch skimming water faucet
- Six stainless steel pasta baskets supplied
- Hinged basket drain stand
- Safety cut-out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular

OVERALL CONSTRUCTION

- Pan 1.5mm 316 stainless steel
- Stainless steel front, sides and splashback
- Vitreous enamelled control panel
- Double skin door with stainless exterior
- 25mm (1") skimming overflow and pan drain valve
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear
- Six stainless steel baskets with moulded handles
- 304 stainless steel wire basket support grid in pan

CONTROLS

- Large easy to use knob - heat resistant reinforced
- Variable high boil to standby simmer burner control
- Fine adjustment water faucet for pan filling and water refreshing/starch skimming
- Pan protection safety cut-out thermostat
- Millivolt gas valve system (no electrical supply)
- Flame failure protection on pilot
- Piezo ignition to standing pilot burner

CLEANING AND SERVICING

- Open stainless steel pan for easy clean
- Hinged basket drain tray
- Removable basket support grid
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Matching Products



CW2H



CSP6



CN4



CT9



CW3H



CW1H




C6B



CR9D

CP4

450mm Single Pan Gas Pasta Cooker

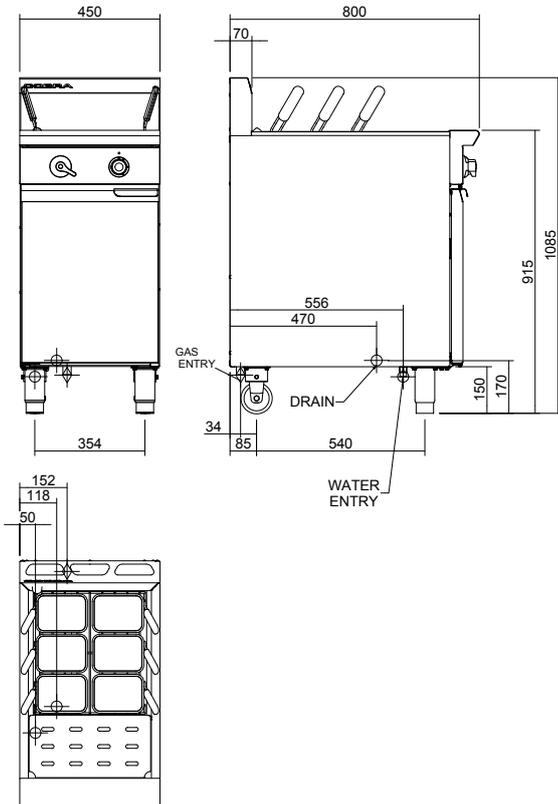

CP4

SPECIFICATIONS

Pan size
Water capacity 40L
Width 365mm
Length 405mm
Basket immersion depth 165mm

Baskets
6 stainless steel perforated baskets with moulded plastic handles
125mm x 165mm x 180mm deep
Stainless steel wire basket support grid

Burners
1 x infra-red burner

Gas power (gross)
47MJ/hr, 13kW Natural gas
46MJ/hr, 12.8kW LP gas

Gas connection
R 3/4 (BSP) male
50mm from left hand side,
34mm from rear and
140mm from floor

Water connection
Cold water connection 50mm
from left hand side, 556mm
from rear and 140mm from floor
R1/2 (BSP) male

Drain connection
Drain must be connected to
system suitable for boiling
water discharge 1" BSP Male
connection 118mm from
left hand side, 470mm from rear,
and 170mm from floor

Dimensions
Width 450mm
Depth 800mm
Height 915mm
Incl. splashback 1085mm

Nett weight
78kg

Packing data
0.587m³, 95.5kg
Width 900mm
Depth 520mm
Height 1255mm

Gas types
Available in Natural gas and
LP gas, please specify when
ordering
Other gas types on request

Options
Side splash guards
Joining caps



Cert. No. AGA 7027G



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au