

STGRF6 TOWER COUNTER SERIES CHILLED



COSSIGA

STGRF6-SD





PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Hinged rear door
- Solid front or sliding front doors
- Deck forced refrigeration
- Two adjustable shelves - flat or angled
- Ticket strips on shelves and base

Maximum shelf load weight 15kg spread evenly

STGRF6

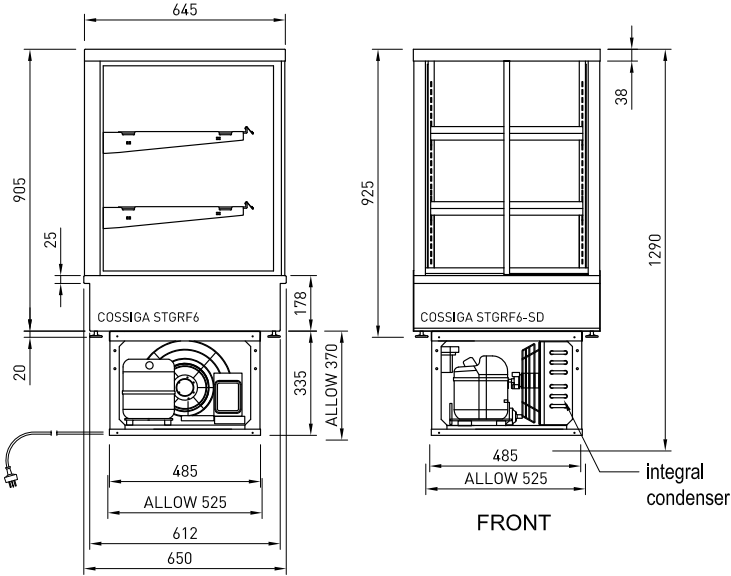

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL | CABINET | | | SHELVING | SHELVING | OPERATING TEMP | SHELF | BASE TRAY | TOTAL FOOD | DISPLAY M ² | INTERNAL VOLUME M ³ | FREQUENCY | REFRIGERANT | POWER | | CONNECTION ELECTRICAL POWER CORD 2200MM | | VOLTAGE | PACKED FOR SHIPPING | | | |
|---------------------|----------------|---------------|----------------|----------|----------|-------------------|-----------|--------------|---------------|---------------------------|--------------------------------------|-----------|-------------|------------|-----|---|---------------|--------------|---------------------|---------------|----------------|--------|
| | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | | | | | | | | | | | KW 230V | AMP | NZ/AUS 10 AMP | UK 13 AMP | | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| STGRF6 STGRF6-SD | 600 | 650 | 925 | 143 | 2 + BASE | 3-5 | 490 X 445 | 540 x 415 | 86 | 0.61 | 0.29 | 50/60 HZ | R290 | 1.01 | 4.3 | 3 PIN PLUG | 3 PIN PLUG | 220- 240V | 700 | 730 | 1450 | 150 |



STGRF9 TOWER COUNTER SERIES CHILLED



COSSIGA

STGRF9-SD




PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Solid front or sliding front doors
- Deck forced refrigeration
- Two adjustable shelves - flat or angled
- Ticket strips on shelves and base

Maximum shelf load weight 15kg spread evenly

STGRF9

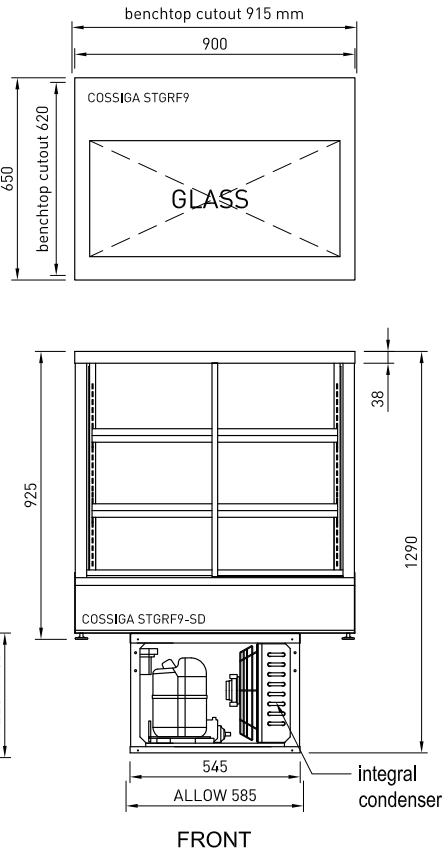

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL | CABINET | | | SHELVING | SHELVING | OPERATING TEMP | SHELF | BASE TRAY | TOTAL FOOD | DISPLAY M ² | INTERNAL VOLUME M ³ | FREQUENCY | REFRIGERANT | POWER | | CONNECTION ELECTRICAL POWER CORD 2200MM | | VOLTAGE | PACKED FOR SHIPPING | | | |
|---------------------|----------------|---------------|----------------|----------|----------|-------------------|-----------|--------------|---------------|---------------------------|--------------------------------------|-----------|-------------|------------|-----|---|---------------|--------------|---------------------|---------------|----------------|--------|
| | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | | | | | | | | | | | KW 230V | AMP | NZ/AUS 10 AMP | UK 13 AMP | | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| STGRF9 STGRF9-SD | 900 | 650 | 925 | 178 | 2 + BASE | 3-5 | 790 X 445 | 840 x 415 | 136 | 0.96 | 0.45 | 50/60 HZ | R290 | 1.06 | 4.6 | 3 PIN PLUG | 3 PIN PLUG | 220- 240V | 1000 | 730 | 1450 | 185 |

STGRF12 TOWER COUNTER SERIES CHILLED



COSSIGA

STGRF12-SD






PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Solid front or sliding front doors
- Deck forced refrigeration
- Two adjustable shelves - flat or angled
- Ticket strips on shelves and base

Maximum shelf load weight 15kg spread evenly

STGRF12

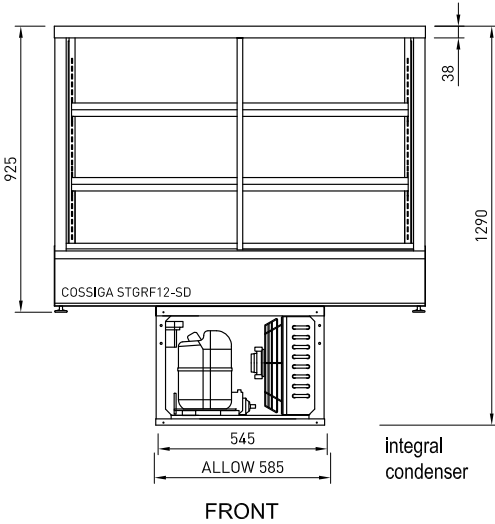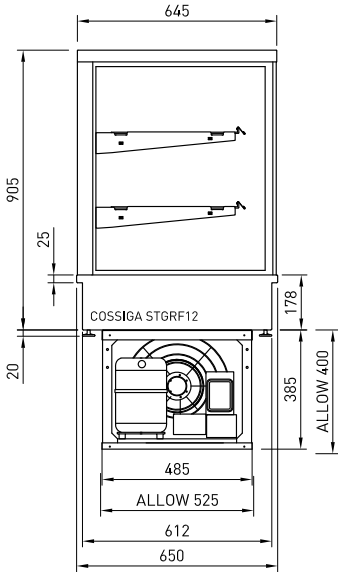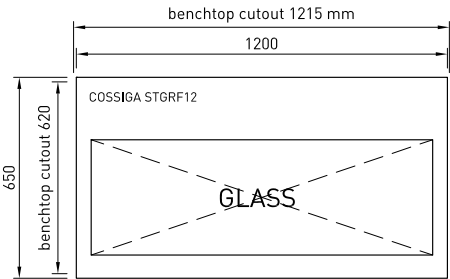

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL | CABINET | | | SHELVING | SHELVING | OPERATING TEMP | SHELF | BASE TRAY | TOTAL FOOD | DISPLAY M ² | INTERNAL VOLUME M ³ | FREQUENCY | REFRIGERANT | POWER | | CONNECTION ELECTRICAL POWER CORD 2200MM | | VOLTAGE | PACKED FOR SHIPPING | | | |
|-----------------------|----------------|---------------|----------------|----------|----------|-------------------|------------|--------------|---------------|---------------------------|--------------------------------------|-----------|-------------|------------|-----|---|---------------|--------------|---------------------|---------------|----------------|--------|
| | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | | | | | | | | | | | KW 230V | AMP | NZ/AUS 10 AMP | UK 13 AMP | | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| STGRF12 STGRF12-SD | 1200 | 650 | 925 | 212 | 2 + BASE | 3-5 | 1090 X 445 | 1140 x 415 | 175 | 1.32 | 0.60 | 50/60 HZ | R290 | 1.15 | 5.0 | 3 PIN PLUG | 3 PIN PLUG | 220- 240V | 1300 | 730 | 1450 | 219 |

STGRF15 TOWER COUNTER SERIES CHILLED



COSSIGA

STGRF15-SD






PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Solid front or sliding front doors
- Deck forced refrigeration
- Two adjustable shelves - flat or angled
- Ticket strips on shelves and base

Maximum shelf load weight 15kg spread evenly

STGRF15

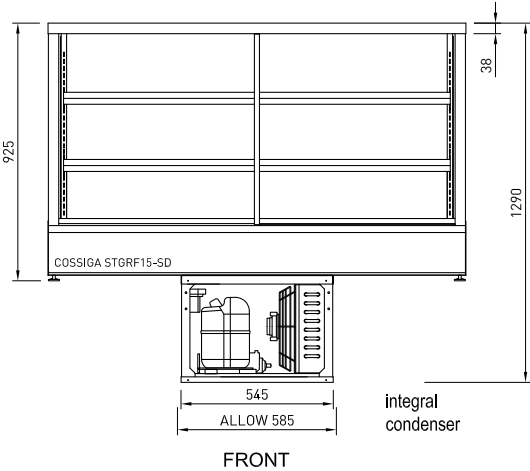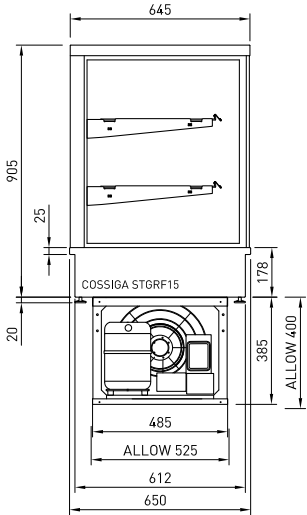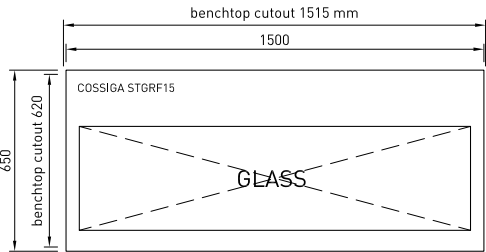

WA DEALER
PRACTICAL PRODUCTS PTY LTD
PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL | CABINET | | | SHELVING WEIGHT KG | SHELVING 2 + BASE | OPERATING TEMP DEG C | SHELF W X D | BASE TRAY W X D | TOTAL FOOD 100MM UNITS | DISPLAY M ² | INTERNAL VOLUME M ³ | FREQUENCY 50/60 HZ | REFRIGERANT R290 | POWER | | CONNECTION ELECTRICAL POWER CORD 2200MM | | VOLTAGE 220- 240V | PACKED FOR SHIPPING | | | |
|-----------------------|----------------|---------------|----------------|--------------------------|----------------------|----------------------------|----------------|-----------------------|---------------------------------|---------------------------|--------------------------------------|-----------------------|---------------------|------------|-----|---|-------------------------------|-------------------------|---------------------|---------------|----------------|--------|
| | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | | | | | | | | | | | KW 230V | AMP | NZ/AUS 10 AMP 3 PIN PLUG | UK 13 AMP 3 PIN PLUG | | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| STGRF15 STGRF15-SD | 1500 | 650 | 925 | 243 | 2 + BASE | 3-5 | 1390 X 445 | 1440 x 415 | 285 | 1.67 | 0.75 | 50/60 HZ | R290 | 1.24 | 5.4 | 3 PIN PLUG | 3 PIN PLUG | 220- 240V | 1600 | 730 | 1450 | 300 |

