

ELECTRIC PEDESTAL KETTLE

E



SPECIFICATIONS:

Shall be a CROWN Model _____, self-generating, electric, pedestal kettle. A double wall kettle interior shall form a steam jacket around the lower 2/3 of the kettle. The jacket enclosure shall contain distilled water which is factory sealed. The bottom of the kettle shall be of hemispherical design for superior heat circulation.

The pedestal base shall have four, 7/16" holes evenly spaced for securing unit to the floor.

Construction shall be all welded #4 finish stainless steel, type 304. The liner on models 20 through 40 gallon shall be standard 316 for high acid content cooking. The controls shall be integrally mounted and shall include a power switch, thermostat, pilot light, low water light, vacuum/pressure gauge, safety relief valve, and low water shut off.

The kettle shall be standard with removable elements. Convenience features shall include a 2" (50 mm) draw-off valve, 20 through 40 gallon models are supplied with a hinged counterbalanced stainless steel domed cover. The 60 through 100 gallon models are supplied with a spring assist hinged stainless steel domed cover. The kettle shall be ASME Code stamped, National Board Registered, c-CSA-us and NSF certified.

The kettle shall operate in a temperature range of 165°F to 285°F (74°C to 140°C) at a maximum pressure of 50 psi (345 kPa).

Model	Capacity
EP-20	20 Gallon 76 Litre
EP-30	30 Gallon 114 Litre
EP-40	40 Gallon 151 Litre
EP-60	60 Gallon 227 Litre
EP-80	80 Gallon 303 Litre
EP-100	100 Gallon 379 Litre

OPERATION SHALL BE BY:

Electrically, self-generating closed steam system operating at 50 psi (345 kPa) equipped for operation on:

- ☐ 208 VAC, 1 phase, 50/60 Hz. (12 to 18 kW only)
- ☐ 208 VAC, 3 phase, 50/60 Hz.
- ☐ 220 VAC, 1 phase, 50/60 Hz. (12 to 18 kW only)
- ☐ 220 VAC, 3 phase, 50/60 Hz.
- ☐ 240 VAC, 1 phase, 50/60 Hz. (12 to 18 kW only)
- ☐ 240 VAC, 3 phase, 50/60 Hz.
- ☐ 380/220 VAC, 3 phase, 50/60 Hz. 4 wire
- ☐ 415/240 VAC, 3 phase, 50/60 Hz. 4 wire

OPTIONAL ITEMS AT EXTRA COST:

- ☐ Type 316 stainless steel liner for high acid cooking on 60 to 100 gallon models.
- ☐ 3" (76 mm) draw-off valve (TVT-3).
- ☐ 2" (50 mm) dairy valve (DDO-2TS).
- ☐ 3" (76 mm) dairy valve (DDO-3TS).
- ☐ 24 kW on 40, 60, 80 gallon.
- ☐ 33 kW on 60, 80, 100 gallon
- ☐ 380 VAC, 3 phase, 50/60 Hz.
- ☐ 415 VAC, 3 phase, 50/60 Hz.
- ☐ 480 VAC, 3 phase, 50/60 Hz.
- ☐ 600 VAC, 3 phase, 50/60 Hz.
- ☐ Spring assist hinged stainless steel cover, 20 to 40 gallon (SA-).
- ☐ Two piece hinged stainless steel cover (2PHC-).
- ☐ Etched gallon markings (GM-).
- ☐ Etched litre markings (GM-).
- ☐ Correctional package.

ACCESSORIES:

- ☐ Single pantry faucet with swing spout (SF-18).
- ☐ Double pantry faucet with swing spout (DF-18).
- ☐ One piece lift off cover (C-).
- ☐ Triple basket assembly (TBA-).
- ☐ Perforated strainer for draw-off (TPS-).
- ☐ Solid disc for draw-off (TSS-).
- ☐ Strainer hook (SH-).
- ☐ Graduated measuring strip (GMS-).
- ☐ Draw-off valve hose kit (DVHK-2).
- ☐ Calibrated thermostat dial "C".
- ☐ Calibrated thermostat dial "F".

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

CROWN DETAILS AND DIMENSIONS

SERVICE CONNECTIONS


⚡ – ELECTRICAL CONNECTION TO BE AS SPECIFIED ON DATA PLATE

ELECTRICAL CHARACTERISTICS

Available kW			AMPS PER LINE								
MODEL	STD.	OPT.	kW	PHASE	208V	220V	240V	380V	415V	480V	600V
EP-20	12	N/A	12	1	57.7	54.5	50.0	N/A	N/A	N/A	N/A
EP-30	15	N/A		3	33.3	31.5	28.9	18.2	16.7	14.4	11.6
EP-40	18	24	15	1	72.1	68.2	62.5	N/A	N/A	N/A	N/A
EP-60	18	24, 33		3	41.6	39.4	36.1	22.8	20.9	18.0	14.5
EP-80	18	24, 33	18	1	86.5	81.8	75.0	N/A	N/A	N/A	N/A
EP-100	24	33		3	50.0	47.2	43.3	27.3	25.0	21.7	21.7
			24	3	66.6	63.0	57.7	36.5	33.4	28.9	23.1
			33	3	91.6	86.6	79.4	50.1	45.9	39.7	31.8

DIMENSIONS

MODEL	CAPACITY	UNITS	A	B	C	D	E	F(2")	F(3")	G(2")	G(3")	H	J	K
EP-20	20 U.S. gal. 76 litres	inches	21	18	38	23.75	18.5	14.75	15.5	18	17.5	14	21	60.5
		mm	533	457	965	629	470	375	394	457	445	356	533	1537
EP-30	30 U.S. gal. 114 litres	inches	24	20	38	27.75	20	16	16.5	15.75	15.25	12.5	19	63.5
		mm	610	508	965	705	508	406	419	400	387	318	483	1613
EP-40	40 U.S. gal. 152 litres	inches	26	22.5	38	29.75	21	17	18	13.5	13	9	17	65
		mm	660	572	965	756	533	432	457	343	330	229	432	1651
EP-60	60 U.S. gal. 227 litres	inches	29.5	26	42	33.75	19	18	19.25	14	13.5	11	17.25	75
		mm	749	660	1067	857	483	457	489	356	343	280	438	1905
EP-80	80 U.S. gal. 303 litres	inches	33	28	45	36.75	20.5	19.5	20.5	15	14.5	12.75	18	81
		mm	838	711	1143	933	521	495	521	381	368	324	458	2058
EP-100	100 U.S. gal. 379 litres	inches	35.5	30	48	40	22	21.5	22.5	15	14.5	13	20.5	87
		mm	902	762	1219	1016	559	546	572	381	368	330	521	2210

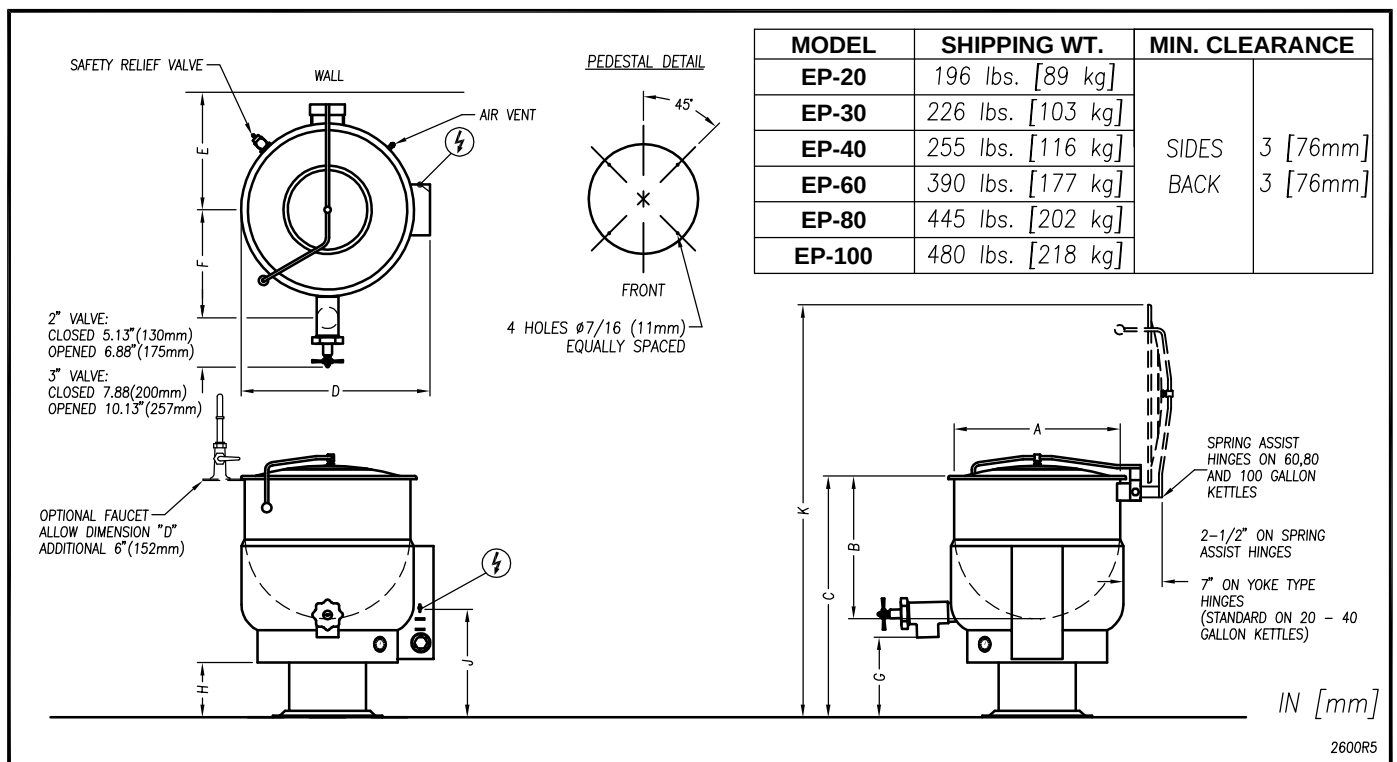

As continued product improvement is a policy of Crown, specifications are subject to change without notice.

BRANCHEMENT DES SERVICES

⚡ – LA CONNEXION ÉLECTRIQUE SERA EFFECTUÉE TEL QUE SPÉCIFIÉ SUR LA PLAQUE SIGNALÉTIQUE.

CARACTÉRISTIQUES ÉLECTRIQUES

kW disponibles			TABLEAU DES AMPÉRAGES								
MODÈLE	STD.	OPT.	kW	PHASE	208V	220V	240V	380V	415V	480V	600V
EP-20	12	N/A	12	1	57.7	54.5	50.0	N/A	N/A	N/A	N/A
EP-30	15	N/A		3	33.3	31.5	28.9	18.2	16.7	14.4	11.6
EP-40	18	24	15	1	72.1	68.2	62.5	N/A	N/A	N/A	N/A
EP-60	18	24, 33		3	41.6	39.4	36.1	22.8	20.9	18.0	14.5
EP-80	18	24, 33	18	1	86.5	81.8	75.0	N/A	N/A	N/A	N/A
EP-100	24	33		3	50.0	47.2	43.3	27.3	25.0	21.7	21.7
			24	3	66.6	63.0	57.7	36.5	33.4	28.9	23.1
			33	3	91.6	86.6	79.4	50.1	45.9	39.7	31.8

DIMENSIONS

MODÈLE	CAPACITÉ	UNITÉS	A	B	C	D	E	F(2")	F(3")	G(2")	G(3")	H	J	K
EP-20	20 U.S. gal. 76 litres	pouces mm	21 533	18 457	38 965	23.75 629	18.5 470	14.75 375	15.5 394	18 457	17.5 445	14 356	21 533	60.5 1537
EP-30	30 U.S. gal. 114 litres	pouces mm	24 610	20 508	38 965	27.75 705	20 508	16 406	16.5 419	15.75 400	15.25 387	12.5 318	19 483	63.5 1613
EP-40	40 U.S. gal. 152 litres	pouces mm	26 660	22.5 572	38 965	29.75 756	21 533	17 432	18 457	13.5 343	13 330	9 229	17 432	65 1651
EP-60	60 U.S. gal. 227 litres	pouces mm	29.5 749	26 660	42 1067	33.75 857	19 483	18 457	19.25 489	14 356	13.5 343	11 280	17.25 438	75 1905
EP-80	80 U.S. gal. 303 litres	pouces mm	33 838	28 711	45 1143	36.75 933	20.5 521	19.5 495	20.5 521	15 381	14.5 368	12.75 324	18 458	81 2058
EP-100	100 U.S. gal. 379 litres	pouces mm	35.5 902	30 762	48 1219	40 1016	22 559	21.5 546	22.5 572	15 381	14.5 368	13 330	20.5 521	87 2210

