


SPECIFICATIONS

MPT1401-DD



2-dr Upright Top Mount Chiller

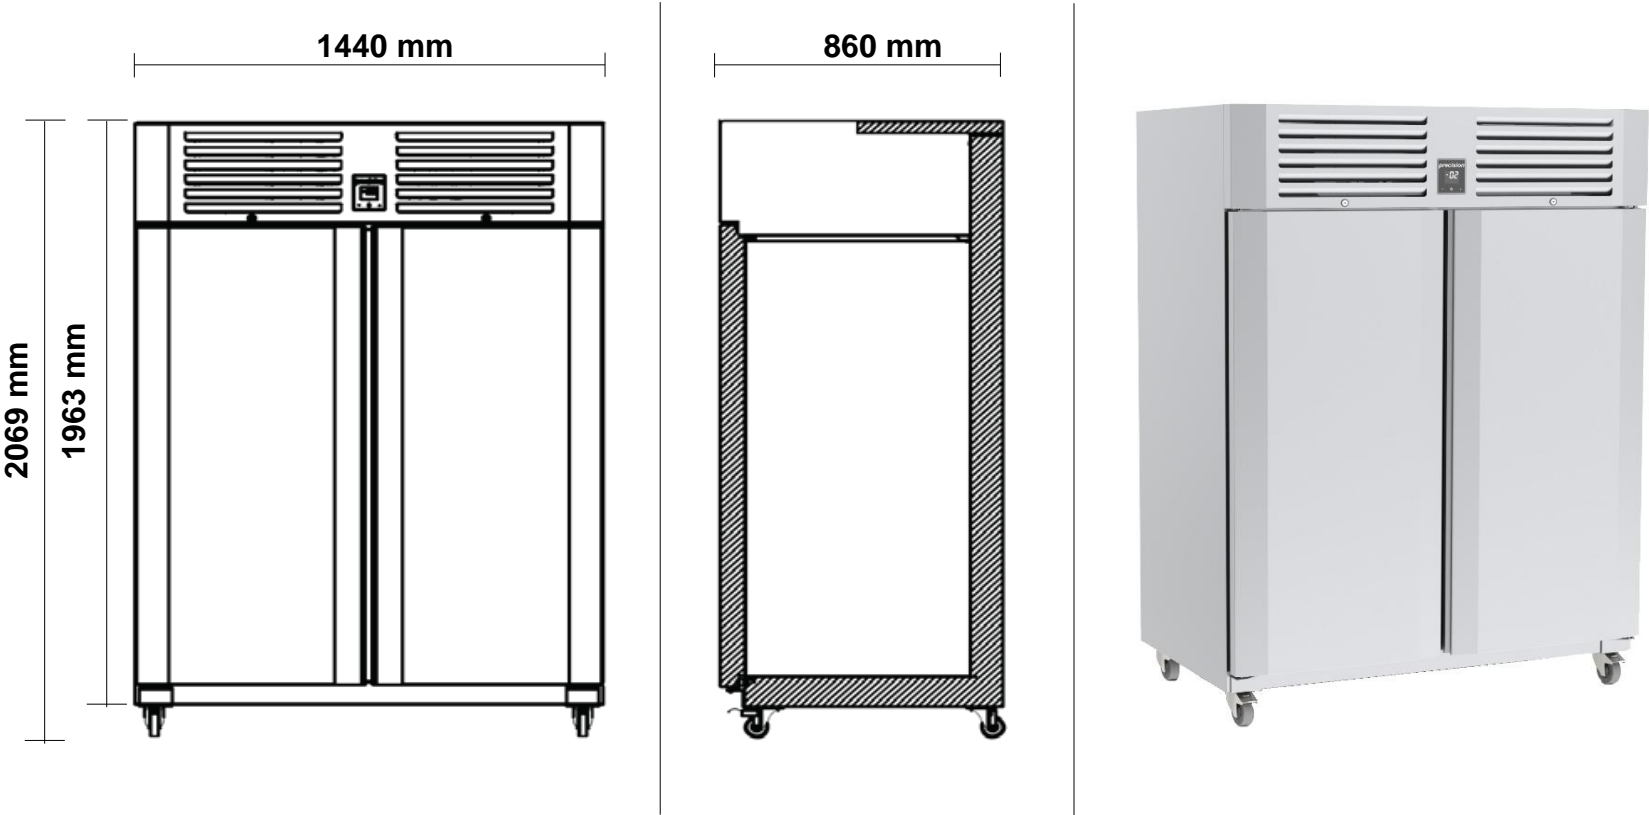

Specifications			
Refrigeration system	Self-contained, top mounted, electronically controlled, refrigeration unit		
Refrigerant	R290	Gas Charge	150 g
Electrical	220-240 Volts a.c. 50 Hz	Amps	4.6 Amps
Nominal capacity	964 Watts @ -10°C SST		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Insulation	90mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet body	304 Stainless Steel Exterior & Interior, Galvanised Steel Back & Base		
Cabinet temperature range	-2°C to +4°C up to 43°C ambient		
kWh/24hr	4.4 kWh	Star Rating	3 Stars
Cabinet internal volume	1400 litres	Net usable GN volume	tbc
Weight	210 kg	dBA	73
Worktop	n/a		
Door Opening	2 x SS Self-Closing Lockable Doors (Accepts full GN1/1 & GN1/2 pans)		
Door Configuration	2 x Stainless Steel Solid Doors		
Shelves	4 x shelves & adjustable tray slides per door		Total = 8
Options	Glass Door, Remote, Legs/Castors		
Cabinet dimensions	External	Internal	
Width	1440 mm	1277 mm	
Depth	860 mm	657 mm	
Height	1963 mm (excl. legs or castors)		1459 mm