

Single Door Underbench Storage Refrigerators


Features:

- Lockable door with handles
- Static cooling system with manual defrosting
- Adjustable feet with rollers at the back
- Frequency/voltage: 50Hz/220-240 V

- Digital controller and digital temperature display
- Plastic coated steel shelves
- Refrigerant: R600a
- Insulation thickness: 45 mm



MC210H

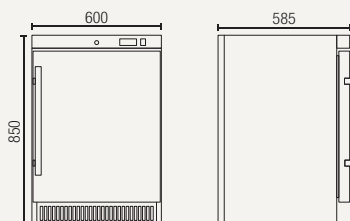

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 130 L

Exterior dimensions in mm: 600w x 585d x 850h

Number of adjustable shelves: 3

Energy consumption in 24h: 0.94 kWh


Temperature set range: -2°C to +10°C

Gross/net weight: 49/41 kg

Door material: stainless steel

Ambient temperatures: 30°C

MC210G



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 136 L

Exterior dimensions in mm: 600w x 585d x 850h

Number of adjustable shelves: 3

Energy consumption in 24h: 1.82 kWh

Temperature set range: 0°C to +10°C

Gross/net weight: 52/44 kg

Door material: glass

Ambient temperatures: 25°C