



DCC12


**STANDARD FEATURES**

- › **GlassMax** minimalist canopy (more glass/less frame) that maximises the visibility of displayed food from all angles
- › Stainless steel top
- › **MiniTek** compact refrigeration technology built into base of cabinet. No bench cut-outs or condenser installation required and cabinet is freely moveable across benches, between benches and to new locations
- › Four food display levels: three shelves plus bottom trays; offering more extensive display area than comparable cabinets
- › Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and tilted positions
- › **CrumbCatch** feature in bottom trays that collects falling crumbs and food
- › High quality European and Japanese refrigeration components
- › Designed to operate at 3 – 5°C in room environments up to **28°C**
- › Fan forced air flow for even temperature distribution
- › **ClearView** front glass for condensation control
- › Refrigeration optimised to provide a high humidity environment that maintains food quality for longer
- › **DuraCoat** system providing a protective coating over the refrigeration coil to prevent food acid corrosion
- › **SureVap** self-evaporating system for condensate—no drain required
- › **SlimLED** under-shelf LED strip lighting with 12V safety
- › Rear sliding double-glazed doors on friction-free, low wear tracks (doors removable for cleaning)

**For Factory Options refer to page 60**

**For Cabinet Accessories refer to page 72**

**SIDE VIEW**

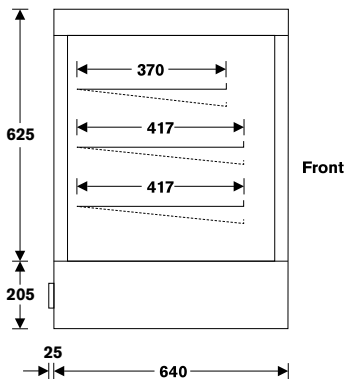

**minitek**  
REFRIGERATION TECHNOLOGY

# DEVON: CHILLED COMPACT

This innovative and unique cabinet incorporates Festive's leading MiniTek technology to deliver the most advanced and flexible counter top on the market—simply plug in and operate.

**4°C operating temperature**



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au

Model	DCC9	DCC12	DCC15	DCC18	DCC24
Length	900mm	1200mm	1530mm	1770mm	2370mm
Depth*	640mm	640mm	640mm	640mm	640mm
Height	830mm	830mm	830mm	830mm	830mm
Available Display Area	1.35m <sup>2</sup>	1.85m <sup>2</sup>	2.4m <sup>2</sup>	2.7m <sup>2</sup>	3.7m <sup>2</sup>
Power Connection	10A Plug	10A Plug	10A Plug	10A Plug	10A Plug

\*Add extra 25mm for protruding control panel, switches, and cable exit