





# INLINE

## GN SERIES 4x 1/1 PANS MOBILE REFRIGERATED

RANGE	INLINE GN SERIES
TEMPERATURE	REFRIGERATED
MODEL	IN-GNC04-M
INSTALLATION	MOBILE
REFRIGERATION	INTEGRAL, R513A
HEIGHT	942mm (without gantry)
	1300mm (with flat self-serve gantry)
WIDTH	1663mm
DEPTH	974mm

CORE PRODUCT TEMPERATURE	+2°C – +4°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH
CABINET CLASSIFICATION	3M1







## FEATURES

-  **High energy efficiency: 1.0 kWh per hour (average)**
-  **Maintains an average of +2°C - +4°C core product temperature at Climate Class 3 25°C/60%RH**


### Mobile Refrigerated Display

- Timeless stainless steel chassis fitted with heavy duty castors to support mobility
- Three levels allowing deck trays to be positioned from 150mm deep below the air curtain
- Merchandise with GN pans (accessories) or use your own displayware
- Reversible deck pans provide ice display option

### Operational Excellence

-  Engineering excellence and heavy duty build quality provide years of trouble free operation
-  Double-skin insulated well
-  Easy to clean - cabinets can be cleaned and serviced with many parts operator removable for simple safe access
-  Automatic intelligent active defrost cycle
-  Manual condensate removal
-  With regular preventative maintenance by a technician, the life of the cabinet can be extended
- Onboard control panel: Temperature, Power, Refrigeration
- Fully integral refrigeration system

### Gantry (Option)

-  Constructed from toughened safety glass and fitted with 50,000 hour LED lighting at 1500 lumens per metre



Showing : Inline GN Series Mobile refrigerated 4x 1/1 pans, fitted with flat self-serve gantry (option) and GN pans (accessories)

## OPTIONS & ACCESSORIES

- Gantries: Flat self-serve, curved self-serve, flat serve-over
- GN pans (various sizes)
- GN dividers
- Auto Condensate Removal (ACR)
- Tray race



Please contact FPG to discuss your requirements for meeting country-specific standards.



# INLINE

## GN SERIES 4x 1/1 PANS MOBILE REFRIGERATED

### REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-GNC04-M	+2°C – +4°C	Climate Class 3 - 25°C / 60% RH	Integral	R513A	Manual/ACR <sup>1</sup>

<sup>1</sup>Option.

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>2</sup>	HOURS	LUMENS	COLOUR
IN-GNC04-M	220-240 V	Single	4.0 A	24.0	1.00	IP 22	3 metre, 3 core cable	10 amp, 3 pin plug	N/A	N/A	N/A
GANTRY (Option)	220-240 V	Single	0.3 A	1.6	0.07	IP 22	Wired to GN	N/A	50,000	1500 per metre	Natural
ACR (Option)	N/A	N/A	4.0 A	24.0	1.00	N/A	N/A	N/A	N/A	N/A	N/A

<sup>2</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA (DECK TRAYS)	NO. OF 1/1 PANS <sup>3</sup>	DECK TRAY LEVELS	DRAIN DIAMETER	CHASSIS CONSTRUCTION
IN-GNC04-M	0.7 m <sup>2</sup>	Accommodates 4	3 levels	19mm	Stainless 304 and mild steel

<sup>3</sup>Accessory.

### DIMENSIONS WITHOUT GANTRY


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-GNC04-M	942 x 1663 x 974	300 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

#### Installation note:

**UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.**

Elevations show cabinet fitted with flat self-serve gantry (option) and GN pans (accessories), and include other gantry options available.

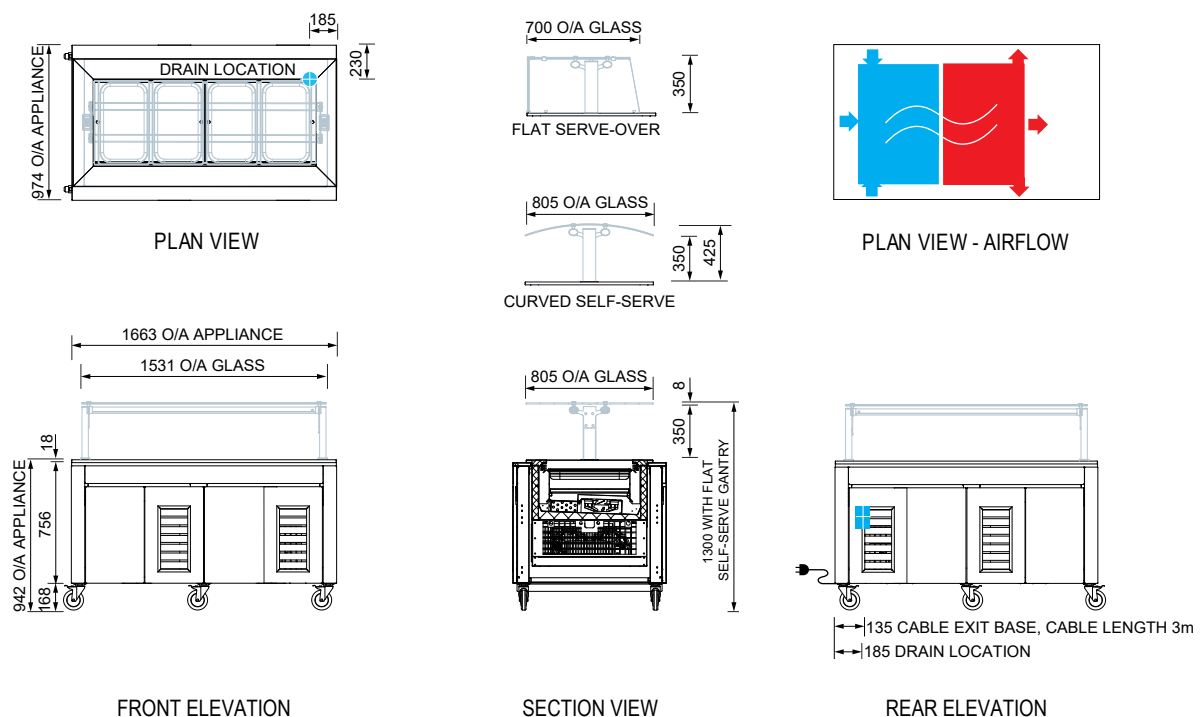

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

