



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 32kg production per 24/hr of medium ice cube.
11.5kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

266 mm drain height including legs to finished floor.



ICE PRODUCTION



Air Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C				
°F	90°	70°	60°	50°
10°	30	34	36	38
50°	66	75	79	84
21°	27	30	32	34
70°	60	66	71	75
32°	23	26	28	30
90°	51	57	62	66
38°	19	21	22	23
100°	42	46	49	51

Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C				
°F	90°	70°	60°	50°
10°	28	32	34	36
50°	62	71	75	79
21°	26	30	32	34
70°	57	66	71	75
32°	25	29	31	33
90°	55	64	68	73
38°	21	26	28	29
100°	46	57	62	64

CUBE TYPE




20g weight BRIGHT CUBE

32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Start-standby Switch
Status Led

BIN CAPACITY

11.5 Kg - 25.3 lbs | 575 pcs

DIMENSIONS

W x D x H (mm)

400 x 540 x 690/810



460 x 600 x 850

OPERATING REQUIREMENTS

Rejected Heat 979 W

Air Volume 185 m³/h



220-240/50/1



R290 GWP = 3

MIN

10°C (50°F)



MAX
40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %

1 Bar (14 psi)



5 Bar (70 psi)




SPECIFICATIONS


	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO ₂ equiv.
CS38 ZP A		670	370	10	29.0	3.2	34	75	40	88	0
CS38 ZP W		670	290	10	20.3	43.2	34	75	40	88	0



Vista frontale
Front view


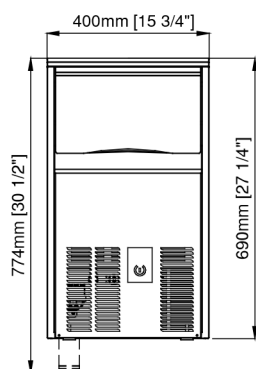


Vista laterale
Lateral view



Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

Vista superiore
Top view

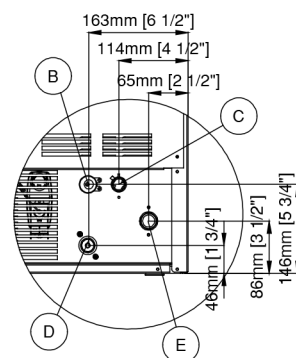

(B) Electrical cable supply / Ingresso alimentazione elettrica

(C) Water outlet connection / Attacco scarico acqua diam. 20 mm

(D) Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm

(E) Water inlet connection / Attacco entrata acqua - 3/4" gas