



Thanks to a continuous and regular flow, the water is distributed on a refrigerated surface designed to increase ice production. Three different sizes are available **FULL DICE**, **HALF DICE** and **LARGE DICE**

High production modular ice maker.
Up to 300kg production per 24/hr of dice cube.
Head only, stainless steel cabinet.
Complete with water & drain hoses.
10 AMP power supply.



ICE PRODUCTION


Air Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	250	285	305	320
50°	551	628	672	705
21°	235	265	280	290
70°	518	584	617	639
32°	195	215	220	225
90°	430	474	485	496
38°	175	185	189	192
100°	386	408	417	423


Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	253	275	280	285
50°	558	606	617	628
21°	245	265	270	275
70°	540	584	595	606
32°	220	240	245	250
90°	485	529	540	551
38°	215	235	240	245
100°	474	518	529	540


CUBE TYPE



10g
FULL CUBE
24mm x 22mm x 22mm



6g
HALF CUBE
24mm x 10mm x 29mm



17g
LARGE CUBE
24mm x 29mm x 29mm

Solid ice cube, suitable for quick drink cooling, available in three different sizes, **FULL DICE** (M models), **HALF DICE** (MH models) and **LARGE DICE** (ML models), can be used in various applications: ice buckets, whisky on the rocks and cocktails.

CONTROL PANEL

	Power
	Operating
	Bin Full / Washing
	Alarm
	High Pressure Alarm
	Reset Button / Washing

SUGGESTED STORAGE BIN



BH76
Stainless steel storage bin.
244kg capacity.

DIMENSIONS

W x D x H (mm)
760 x 620 x 575

OPERATING REQUIREMENTS

Rejected Heat	3388 W
Air Volume	590 m ³ /h



220-240/50/1









R404a GWP=3922

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)

SPECIFICATIONS

											
	cond	comp. W	ABS. W	Fuse	kWh/100kg	L / hr	kg	lbs	kg	lbs	Ton CO2 equiv.
M302 A		3475	1400	16	13.9	14.8	71	157	86	190	3.33
M302 W		3475	1300	16	9.6	137	71	157	86	190	2.16

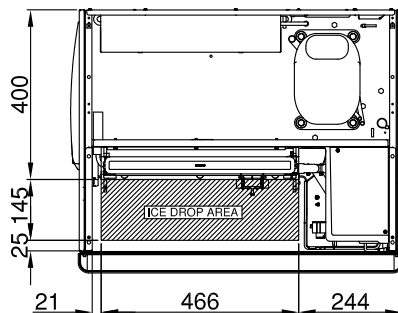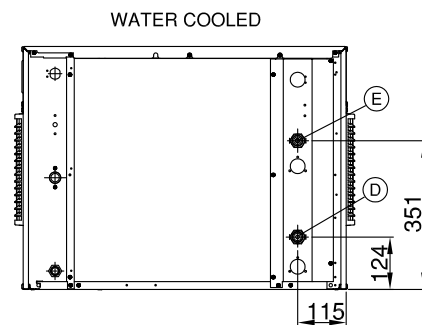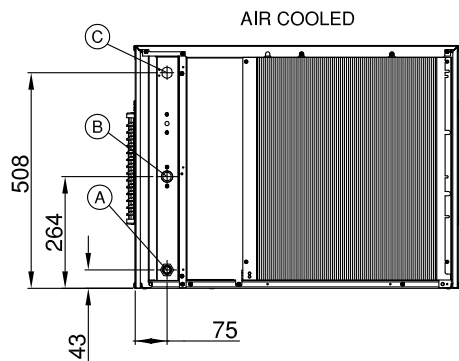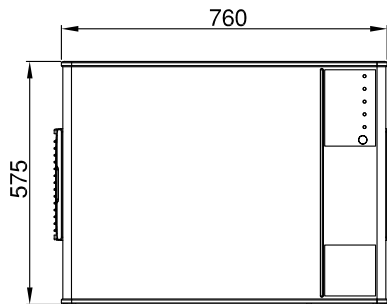

- (A) Water drain 20mm diam.
- (B) Potable water inlet 3/4" gas
- (C) Electrical cable supply
- (D) Water cooled inlet 3/4" gas
- (E) Water cooled outlet 3/4" gas

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au