

## EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 37kg

**ECS 86 AS** Small gourmet cube 8g, Ø21mm x 25mm

**ECL 86 AS** Large gourmet cube 39g, Ø38mm x 41mm



Small gourmet cube  
8g, 21mm dia x H 25mm



Large gourmet cube  
39g, 38mm dia x H 41mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 37kg daily production rate
- 19kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front panel in and out airflow for built-in installation
- Front access condenser air filter, removable and washable
- Easy access front ON-OFF switch
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes ice scoop, water and drain hose



## EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 37kg

### ECS 86 AS, ECL 86 AS

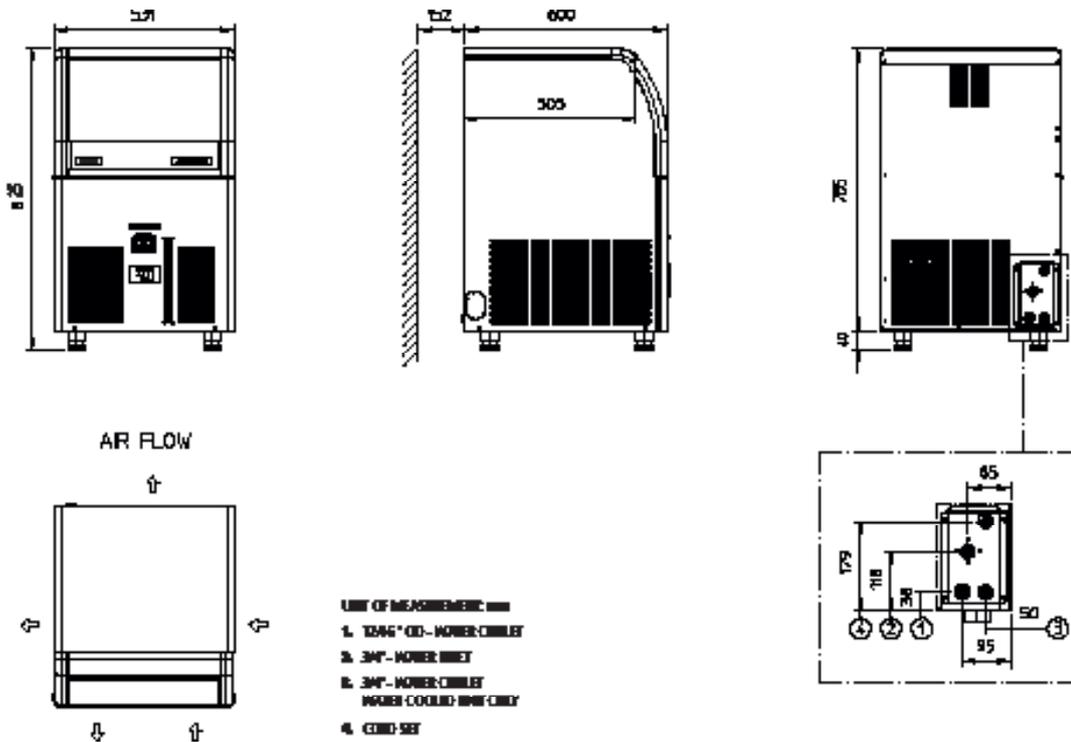

#### Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
ECS 86 AS	38	37	31
ECL 86 AS	36	34	27

#### Dimensions

Width:	531mm
Depth:	600mm
Height:	825mm (including legs)
Nett weight:	46kg
Packed weight:	53kg

#### Water consumption

Air cooled version:

ECS 86 AS: 5.8 litres per hour

ECL 86 AS: 5.0 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 480W (S) /

550W (L). 10A cordset supplied

No. Circuit wire: 3

Compressor: 1200W

Energy consumption: 10.8kW/hr

#### Refrigerant type

R134a

#### Installation distance from wall

Rear 150mm

Sides 150mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R ¾"

Cold water: 5-38°C

Pressure: 100-500kPa

Water outlet connection: Ø¾"



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au