

EC Series Self Contained Machines – with Progressive Water Discharge – up to 39kg

ECS 87 AS OX Small gourmet cube 8g, Ø21mm x 25mm

ECL 87 AS OX Large gourmet cube 39g, Ø38mm x 41mm



Small gourmet cube 8g,
21mm dia x H 25mm



Large gourmet cube 39g,
38mm dia x H 41mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 39kg daily production rate
- 19kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- Hydrocarbons R290 refrigerant gas
- XSafe - Natural Sanitation System
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front access condenser air filter, removable and washable
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes removable air filter, ice scoop, water and drain hose
- Optional adjustable feet available

EC Series Self Contained Machines – with Progressive Water Discharge – up to 39kg

ECS 87 AS OX, ECL 87 AS OX

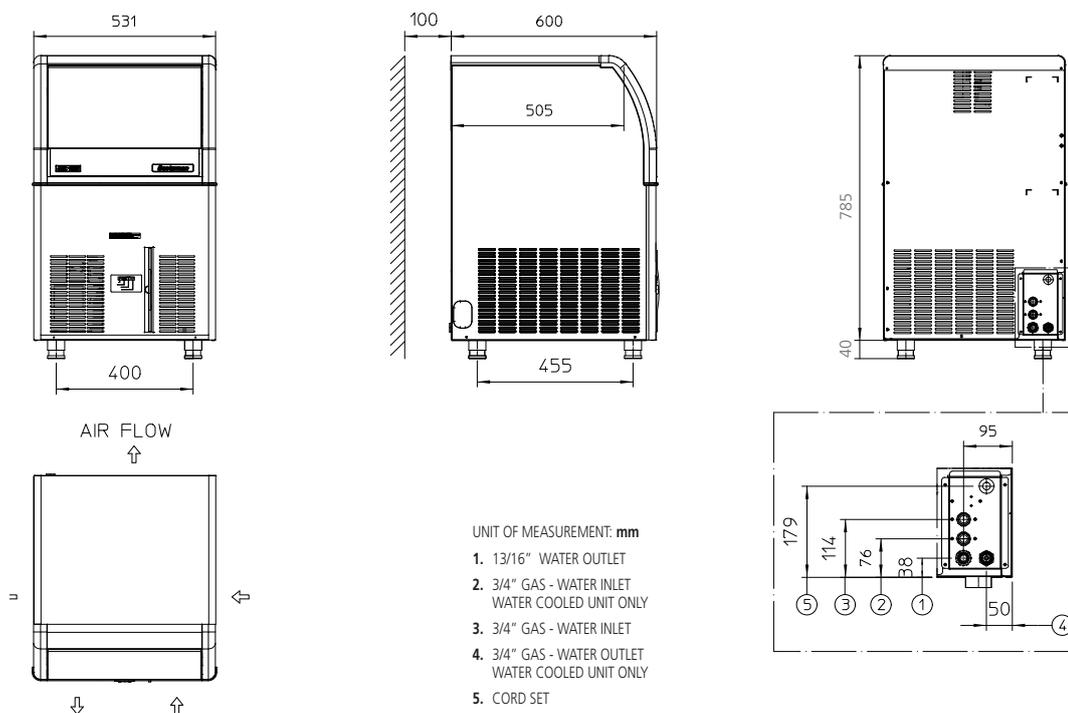

Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
ECS 87 AS OX	40	39	31
ECL 87 AS OX	36	34	27

Dimensions

Width:	531mm
Depth:	600mm
Height:	825mm (including legs)
Nett weight:	46kg
Packed weight:	53kg

Water consumption

Air cooled version: 3.4 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 570W,
10A cordset supplied
No. Circuit wire: 3
Compressor: 1215W
Energy consumption: 10.8kW/hr

Refrigerant type

R290

Installation distance from wall

Rear 100mm
Sides 150mm
Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø3/4"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

© Copyright Moffat Ltd
AN.SM.2021



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au