



NW Series Modular Dice Ice Machines — up to 199kg

NW 507 AS OX Dice cube 10g, 22mm x 22mm x 22mm NWH **507 AS OX** Half dice cube 6g, 10mm x 22mm x 28mm



Dice cube 10 g W 22 x D 22 x H 22 mm



Half dice cube 6 g W 10 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 199kg daily production rate
- Head only ice maker requires a separate storage bin to store the ice produced
- Air cooled version
- · Hydrocarbons R290 refrigerant gas
- XSafe Natural Sanitation System
- · Vertical evaporator spray-system technology
- Top air discharge suitable for narrow space installation
- Agion Technology resists the growth of microbes and T304 grade stainless steel exterior
- Auto-alert indicator lights to show operation status and maintenance
- One touch cleaning for time and labour saving
- · Front evaporator access for easy servicing
- Includes air filter, water and drain hose

Recommended storage bins

- NB 193 129kg storage capacity
- NB 393 with CBT 30-52 AMCD cover 178kg storage capacity














NW Series Modular Dice Ice Machines — up to 199kg

NW 507 AS OX, NWH 507 AS OX

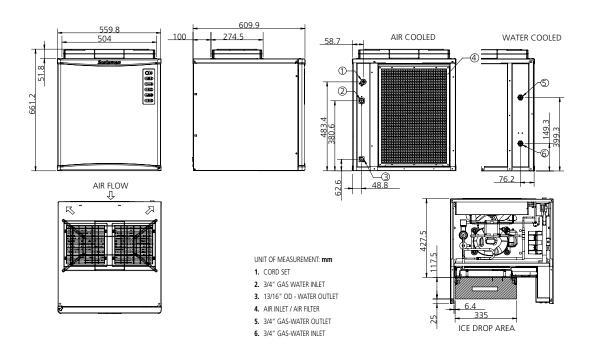

Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NW 507 AS OX	210	199	145
NWH 507 AS OX	201	192	141

Dimensions

Width: 560mm
Depth: 610mm
Height: 662mm
Nett weight: 67kg
Packed weight: 77kg

Water consumption

Air cooled version: NW 507 AS: 10.7 litres per hour NWH 507 AS: 10.0 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1210W,

10A cordset supplied

No. Circuit wire: 3 Compressor: 2941W

Energy consumption: NW 507 AS: 21.1kW/24hr NWH 507 AS: 20.2kW/24hr

Refrigerant type

R290

Installation distance from wall

Rear 100mm Top 400mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø 20mm

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

© Copyright Moffat Ltd



PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au