

SIDE BACK BAR

FEATURES

• EQUIPPED WITH EASY-TO-CLEAN AIR FILTER

The accumulation of dust in the condenser causes failures and/or breakdown in refrigeration. Refrigeration operates normally until they accumulate a certain amount of dust. When they reach over their limit, performance will drop rapidly, resulting in damages and possible disposal of stored good.

This is why all refrigeration manufactures require the condenser to be cleaned at least once a month for warranty to remain. Fortunately for SKIPIO, this process is simplified due to the frontal access air filter device. Users only need to pull out the filter and vaccum lightly to remove the dust. Simply place it back into position when complete.

• EFFICIENT REFRIGERATION SYSTEM

SKIPIO's refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration system. These include efficient evaporators and condensere for faster cooling and greater efficiency.

• FORCED AIR COOLING SYSTEM

Fast cooling and balanced temperature throughout the cabinet.

• STAINLESS STEEL COUNTERTOP AND INTERIOR

The exterior of cabinet is constructed with heavy gayge reinforced stainless steel countertop and wear-resistant black vinyl coated galvanized steel. The interior of the cabinet is white powder coated.

SKIPIO Back Bar model guarantees utmost in cleaning and long product life. It also can add a touch of style to the most refined setting.

• ERGONOMICALLY DESIGHED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

• LED LIGHTING INTERIOR

• DOUBLE PANEL GLASS DOORS WITH LOW-E GLASS(SG MODELS)

• HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

• ADJUSTABLE, HEAVY, DUTY, PE(POLYETHYLENE) COATED WIRE SHELVES

• SIDE MOUNT COMPRESSOR UNIT

• REFRIGERATOR HOLDS 33°F~38°F FOR THE BEST IN BEVERAGE PRESERVATION



SBB-2G



SIDE BACK BAR

MODEL	SBB-2G
Classification	Refrigerator
Cabinet Dimension (WxDxH mm)	1500 x 590 x 1047
Capacity(Liters)	400
Inner Temperature(°C)	1°C~8°C
Ambient Temperature(°C)	38
Refrigent	R-134A
Insulation Type	Polyurethane/ Cyclopentane + CFC Free
Power(W)	330W
Voltage(V/Hz/Ph)	240V / 50Hz / 1PH
Weight(Kg)	118
Door type	Swing door
Number of Doors	2
Compressor(HP)	1/4
Number of Shelves	2
Power plug	10A

PLAN VIEW

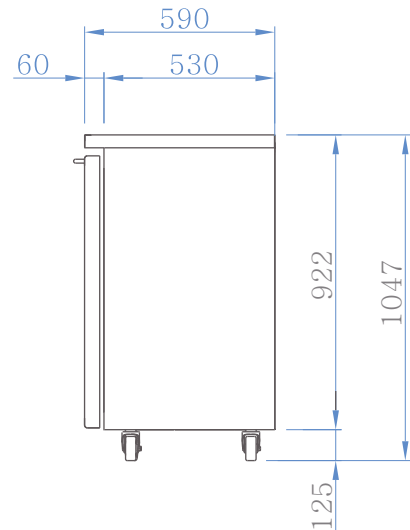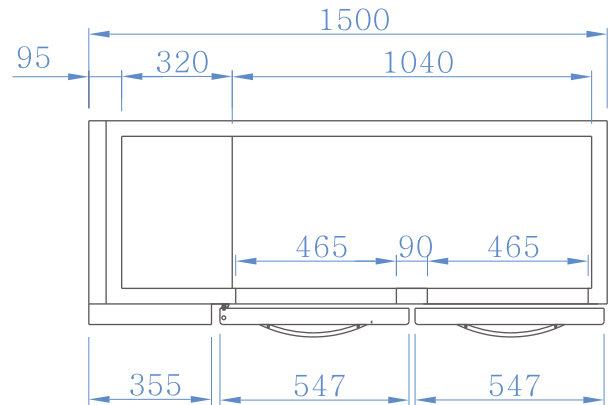

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

