


specifications

BME1500N-A Series

ActiveCore Series, 3 Door (Glass), Upright Fridge

Project: _____

Item No: _____

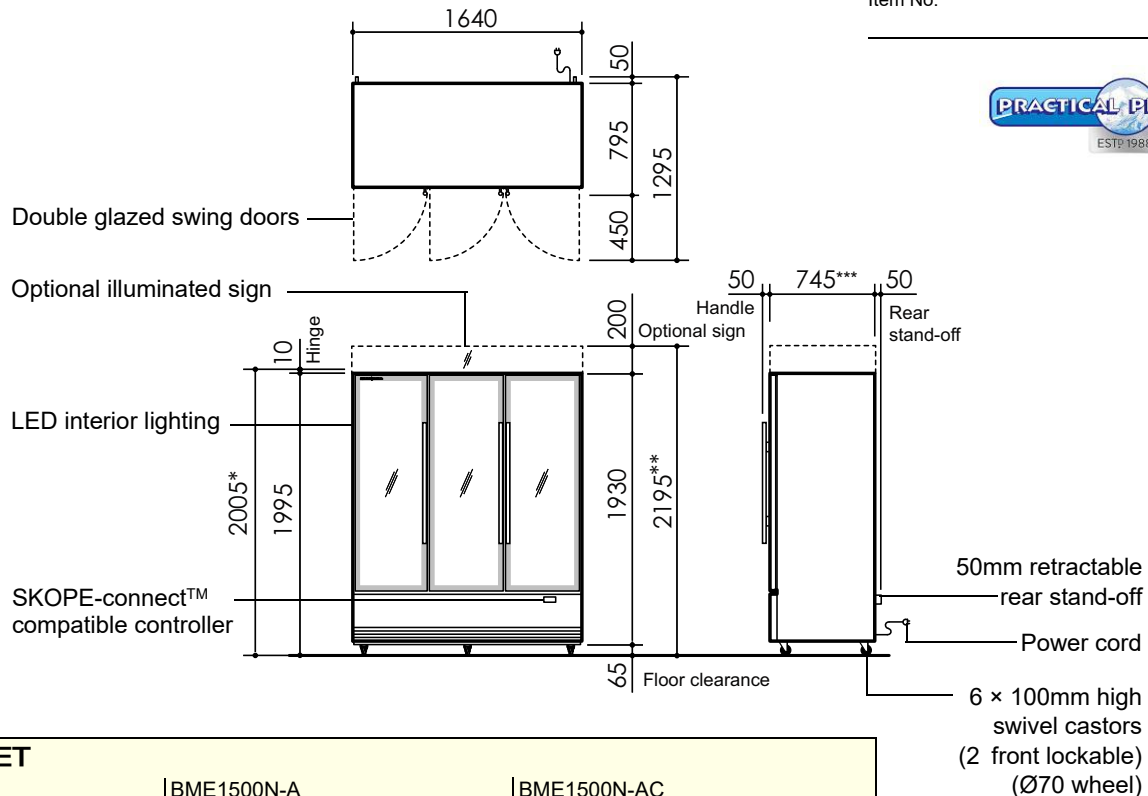

CABINET

Model ID	BME1500N-A	BME1500N-AC
Doors	3 × self-closing, double glazed, single Low-E, argon filled, lockable, argon filled, toughened safety glass swing doors (hinged LH, LH, RH)	
Internal door opening	3 × door openings: 1454mm high × 430mm wide	
Shelves	12 × wire and 3 × stainless steel 15 × wire and 3 × stainless steel Wire shelves: Adjustable height, 490 wide × 520 deep (5 each side), 540 wide × 520 deep (5 middle) Stainless steel bottom shelf: Not adjustable, 485 wide × 515 deep (1 each side), 545 wide × 515 deep (1 middle)	
Sign	n.a.	Illuminated sign
Material	Powdercoat galvanised steel	

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect™ 1°C to 15°C)
GEMS class	M1
GEMS energy consumption	4.99 kWh/24h
GEMS annual running cost	\$547 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	5
Interior side lighting	3 × 1370mm, 15W LED
Sign lighting	n.a.
Power cord	Supplied with 2.0m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.4 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	220 Watts/275 Watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	2005mm* / 2195mm**	1455mm
Width	1640mm	1540mm
Depth	795mm	602mm
Floor area	1.34m ²	
Weight	330kg	
Gross volume	1433 L	

* Height 2005mm without sign (BME1500-A)

** Height 2195mm with sign (BME1500-AC)

*** Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions		Overall cabinet dimensions	
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements

Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm