


## BME600N-A Series

ActiveCore Series, 1 Door (Glass), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

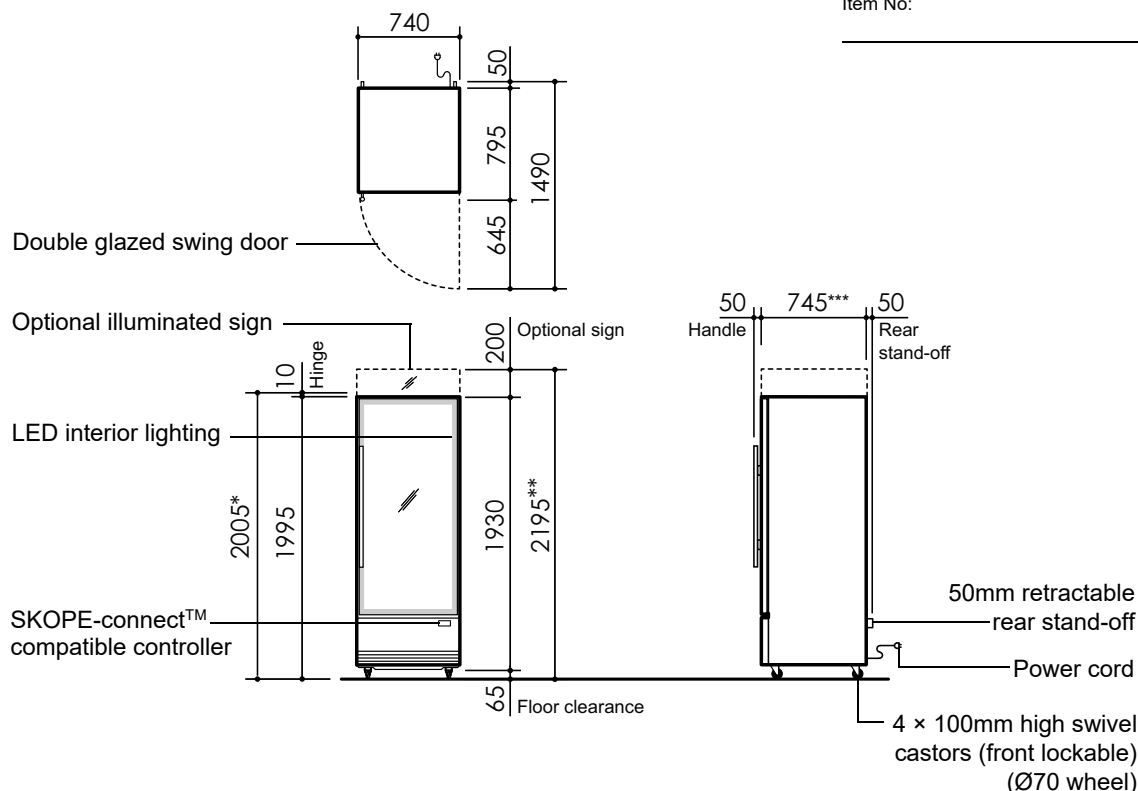

### CABINET

Model ID	BME600N-A	BME600N-AC
Doors	1 x self-closing, reversible, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged RH)	
Internal door opening	1 x door openings: 1454mm high x 620mm wide	
Shelves	4 x wire and 1 x stainless steel	5 x wire and 1 x stainless steel
	Wire shelves: Adjustable height, 625mm wide x 520mm deep	
	Stainless steel bottom shelf: Not adjustable, 625mm wide x 515mm deep	
Sign	n.a.	Illuminated sign
Material	Powdercoat galvanized steel	

### PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	M1
GEMS energy consumption	2.21 kWh/24h
GEMS annual running cost	\$242 p.a. (@ \$0.30/kWh)

### ELECTRICAL

Electrical safety climate class	5
Interior side lighting	1 x 1370mm, 15W LED
Sign lighting	n.a.
Power cord	Supplied with 2.0m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.9 Amps (includes unit 2.6 Amps)

### REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	100 Watts/130 Watts
Drainage	No plumbing required

### DIMENSIONS

	External	Internal
Height	2005mm* / 2195mm**	1454mm
Width	740mm	640mm
Depth	795mm	602mm
Floor area	0.63m <sup>2</sup>	
Weight	185kg	
Gross volume	584L	

\* Height 2005mm without sign (BME600-A)

\*\* Height 2195mm with sign (BME600-AC)

\*\*\* Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

### Ventilation requirements

Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm