


## PG200HF

Pegasus Horizontal 2/1  
INTEGRAL, 1 Door, Freezer

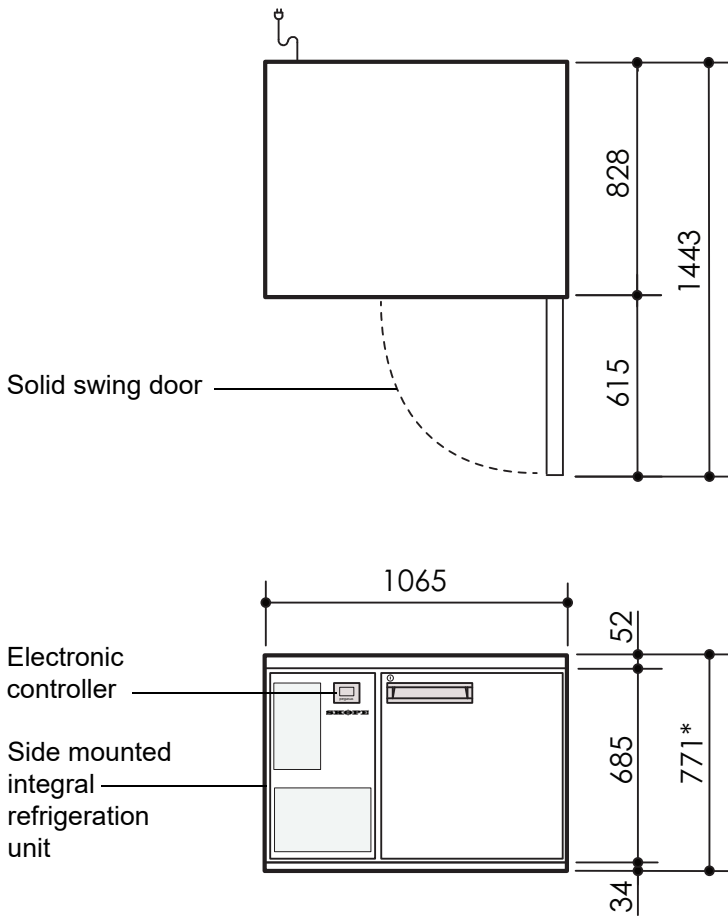

### CABINET DIMENSIONS

|                     | External           | Internal |
|---------------------|--------------------|----------|
| <b>Height:</b>      | 771mm*             | 565mm    |
| <b>Width:</b>       | 1065mm             | 565mm    |
| <b>Depth:</b>       | 828mm              | 650mm    |
| <b>Floor area:</b>  | 0.88m <sup>2</sup> |          |
| <b>Gross volume</b> | 210L               |          |
| <b>Net volume</b>   | 125L               |          |


\* Height includes plinth and worktop (excludes castors and adjustable legs).

#### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

| Linear dimensions | Overall cabinet dimensions | Length of multiple cabinets |                  |
|-------------------|----------------------------|-----------------------------|------------------|
|                   |                            | At each joint               | At each end wall |
| Less than 1 metre | ±5mm                       | ±5mm                        | +15mm            |
| More than 1 metre | -5mm to +10mm              | -5mm to +10mm               | +15mm            |

Pictured with optional 50mm stainless steel worktop



Power cord with 3-Pin plug

### CABINET SPECIFICATIONS

|  |   |
|--|---|
| <b>Door</b>                            | Solid stainless steel, self-closing door (with key lock) - RH hinged  |
| <b>Internal door opening size</b>      | 1 door opening: 565mm high x 565mm wide                               |
| <b>Shelves</b>                         | Two levels of non-tip, adjustable tray slides and/or shelves per door |
| <b>Worktop (optional)</b>              | Optional 50mm square edged stainless steel worktop                    |
| <b>Weight</b>                          | 132 kg  |
| <b>Electrical safety climate class</b> | 5   |
| <b>Internal lighting</b>               | n.a.  |
| <b>Electrical</b>                      | 230-240 Volts a.c. 50 Hz, 3.00 Amps                                   |
| <b>Temperature range</b>               | -18°C to -21°C up to 40°C ambient                                     |
| <b>GEMS class</b>                      | 5L1   |
| <b>GEMS energy consumption</b>         | 7.66 kWh/24h  |
| <b>GEMS annual running cost</b>        | \$839 p.a. (@ \$0.30/kWh)   |
| <b>Refrigeration system</b>            | Electronic controlled, side mounted, integral refrigeration unit      |
| <b>Refrigerant</b>                     | R452A / 750g  |
| <b>Nominal capacity</b>                | 180 Watts @ -30°C SST   |
| <b>Insulation</b>                      | 60mm thick, high density cyclo-isopentane polyurethane foam           |
| <b>Drainage</b>                        | No plumbing required  |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2012 SKOPE Industries Limited

PSS0295 Rev 2.3 Mar. 2021



PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au

