
## specifications







## **PG550HC-2**

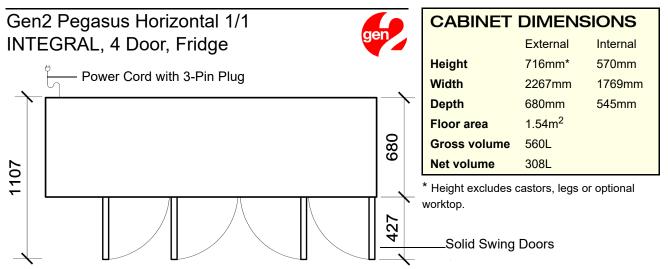

Side Mounted Integral Refrigeration Unit Electronic

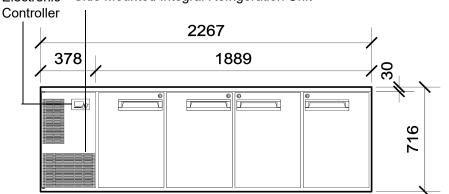



## CABINET SPECIFICATIONS

**Doors** Solid stainless steel, self-closing doors (with key lock) - LH & RH hinged

Internal door opening size 4 door openings: 570mm high x 365mm wide

**Shelves** Two levels of non-tip, adjustable tray slides and/or shelves per door Worktop (optional) Optional 35mm stainless steel worktop with 65mm square edged fascia

Weight 160 kg Electrical safety climate class

Internal lighting 2 x 5W T8 LED tubes (Ø26 x 360mm) - Door activated

**Electrical** 230-240 Volts a.c. 50 Hz, 3.24 Amps Temperature range +1°C to +4°C up to 40°C ambient

**GEMS class** 5M1

**GEMS** energy consumption 7.36 kWh/24h

**GEMS** annual running cost \$806 p.a. (@ \$0.30/kWh)

Refrigeration system Electronic controlled, side mounted, integral refrigeration unit

Refrigerant R134a / 530g

**Nominal capacity** 534 Watts @ -10°C SST

Insulation 60mm thick, high density cyclo-isopentane polyurethane foam

Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2008 SKOPE Industries Limited







PSS0181 Rev. 3.1 Mar. 2021