
specifications

Refrigeration

RF7.UPR.2.SD

ReFlex Series, 2 Solid Door, Upright Fridge

Project:

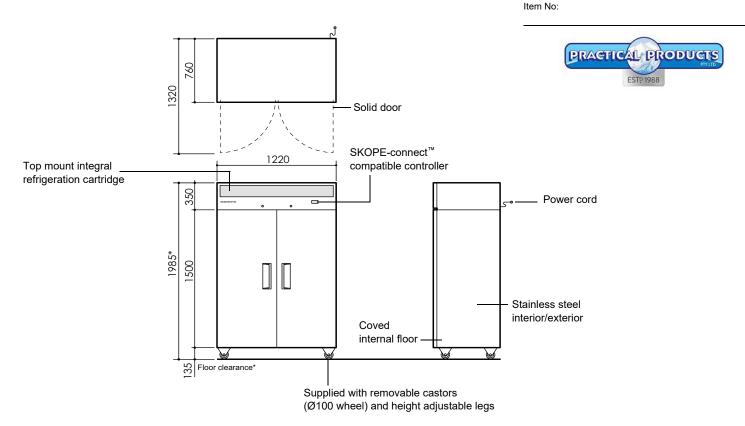

CABINET

Doors 2 × self-closing, lockable, solid swing doors. LH, RH Internal door opening 2 × door openings: 1375 mm high × 495 mm wide

10 × adjustable height shelves: 530 mm wide × 530 mm deep Shelves

Worktop

304 AISI stainless steel interior and exterior Material

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)

GEMS class

GEMS energy consumption 3.91 kWh/24 h

GEMS annual running cost \$428 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class

Interior lighting 2 × 1200 mm, 12W LED lights (door activated) Supplied with a 10 amp plug and 2 m lead Power cord Power supply 220-240 volts a.c. 50 Hz, single phase supply

2.0 amps (includes unit 1.5 amps) Current draw

REFRIGERATION

SCS Connect (SKOPE-connect[™] compatible) Controller

Bluetooth® wireless technology Connectivity interface

Refrigeration system Top mounted, integral, removable refrigeration cartridge

(part number UTKCNI-0018)

Refrigerant R290/90 g (natural refrigerant)

Nominal capacity 650 watts

Heat rejection (Avg/peak) 165 watts/205 watts Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice	e. Copyright © 2019 SKOPE Industries Limited
---	--

DIMENSIONS		
	External	Internal
Height	1985 mm*	1395 mm
Width	1220 mm	1100 mm
Depth	760 mm	600 mm
Floor area	0.93 m^2	1
Weight	159 kg	
Gross volume	921 L	
Net volume	712 L	
* With supplied castors fitted. See height variation below		

Height variation	
Supplied castors	1985 mm
Supplied height adjustable legs	1995-2035 mm
No castors or legs	1850 mm

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet di	mensions	
Less than 1 metre	±5 mm		
More than 1 metre	-5 mm to +10 mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5 mm	+15 mm	
More than 1 metre	-5 mm to +10 mm	+15 mm	

Ventilation requirements	
Тор	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

PSS0589 Rev. 2.13 Jul. 2022



