


RF8.PPZ.3.SD

ReFlex Series, 3 Solid Door Medium Pizza Preparation Fridge

Project: _____
 Item No: _____

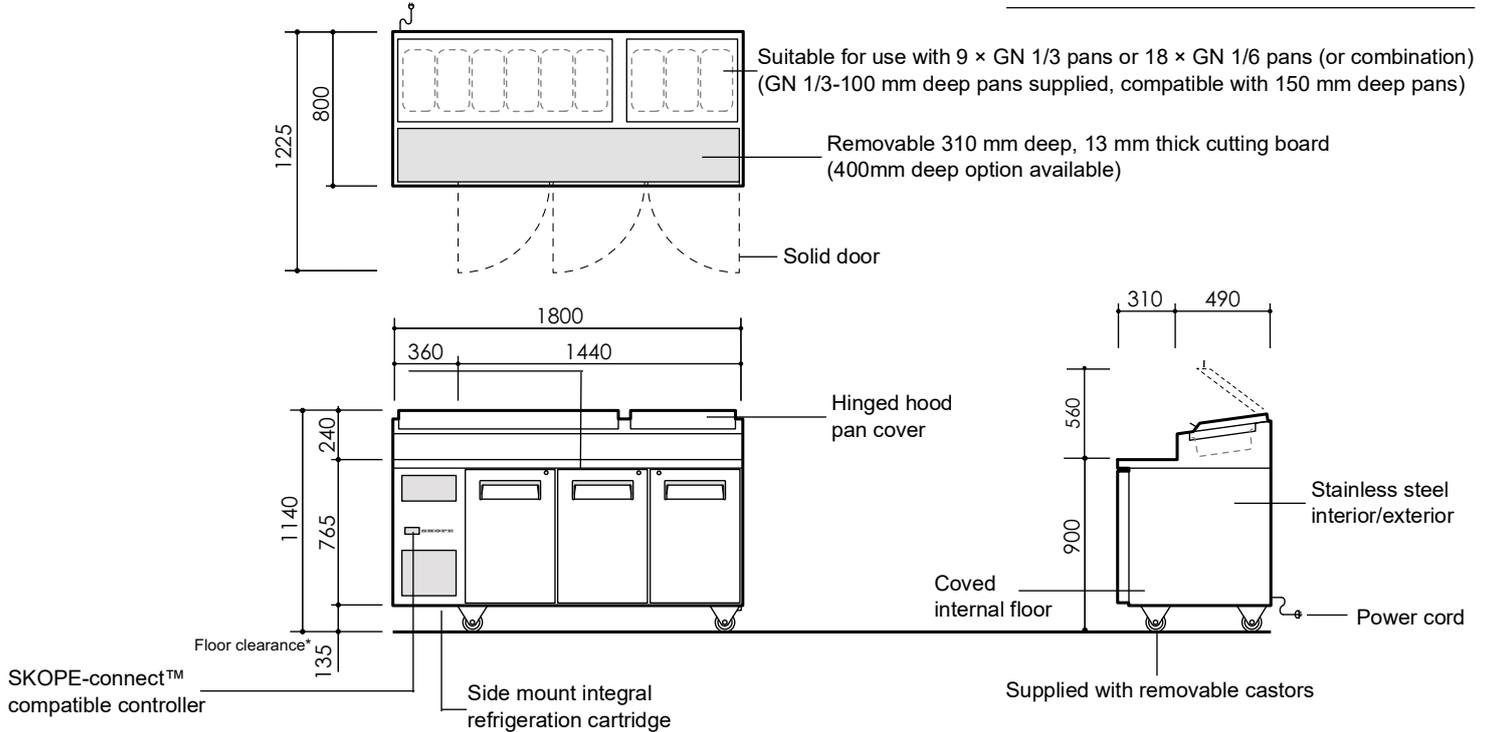

CABINET

| | |
|-----------------------|---|
| Doors | 3 x self-closing, lockable, solid swing doors with stay-open position at over 90°, hinged LH, LH, RH |
| Internal door opening | 3 x door openings: 590 mm high x 370 mm wide |
| Shelves | 6 x adjustable height shelves. Middle shelves: 475 mm wide x 610 mm deep. Outer shelves: 415 mm wide x 610 mm deep. Each shelf is held in place with 4 x shelf clips. Additional shelf clips are available on request. |
| Worktop | Removable, food grade, 13 mm plastic cutting board |
| Material | 304 AISI stainless steel interior and exterior |

PERFORMANCE

| | |
|--------------------------|--|
| Max. ambient temperature | 40°C (lid(s) closed), or 30°C (lid(s) open) |
| Temperature range | 1°C to 5°C (adjustable with SKOPE-connect™ -2°C to 15°C) |
| Total energy consumption | 6.45 kWh/24 h (@ 30°C/55% relative humidity) |
| Annual running cost | \$597 p.a. (@ \$0.30/kWh) |

ELECTRICAL

| | |
|---------------------------------|---|
| Electrical safety climate class | 5 (40°C/40% relative humidity) |
| Interior lighting | 2 x 400 mm, 4W LED lights (door activated) |
| Power cord | Supplied with a 10 amp plug and 2 m lead |
| Power supply | 220-240 volts a.c. 50 Hz, single phase supply |
| Current draw | 3.5 amps (includes unit 2.2 amps) |

REFRIGERATION

| | |
|----------------------------|--|
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth® wireless technology |
| Refrigeration system | Side-mounted, integral, removable refrigeration cartridge (part number ULQCNI-0030) |
| Refrigerant | R290/90 g (natural refrigerant) |
| Nominal capacity | 900 watts |
| Heat rejection (Avg./peak) | 230 watts/290 watts |
| Drainage | No plumbing required in standard applications. If lids are left open for more than 4 hours per day, or venues have high or fluctuating ambient temperatures and humidity, SKOPE recommends connecting condensate to an in-floor drain. |

DIMENSIONS

| | External | Internal |
|--------------|---------------------|----------|
| Height | 1140 mm | 605 mm |
| Width | 1800 mm | 1350 mm |
| Depth | 800 mm | 640 mm |
| Floor area | 1.44 m ² | |
| Weight | 212 kg | |
| Gross volume | 523 L | |

Height variation

| | |
|------------------------|-----------------|
| Supplied castors | 1140 mm |
| Height adjustable legs | 1150 to 1200 mm |
| No castors | 1005 mm |

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

| Linear dimensions | Overall cabinet dimensions | |
|-------------------|-----------------------------|------------------|
| Less than 1 metre | ±5 mm | |
| More than 1 metre | -5 mm to +10 mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | +15 mm |

Ventilation requirements

| | |
|--------|--------------|
| Top | Not required |
| Sides | Not required |
| Back | Not required |
| Bottom | Not required |