# specifications PRACTICAL PRODUCTS






# RF7.UPF.2.SD

ReFlex Series, 2 Solid Door Upright Freezer (R290)

Project: Item No:

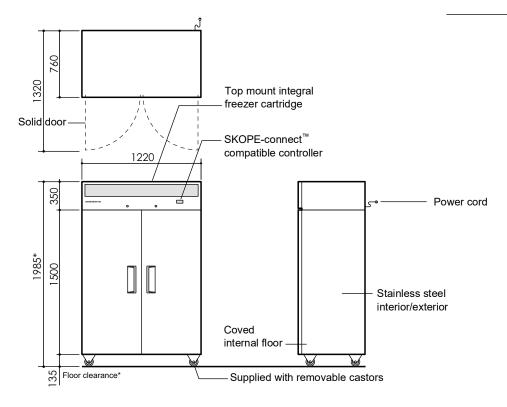

### **CABINET**

Doors 2 × self-closing, lockable, solid swing doors, left and right hand

2 × door openings: 1375 mm high × 495 mm wide Internal door opening

Shelves 10 × adjustable height shelves: 530 mm wide × 530 mm deep

Worktop

Material 304 AISI stainless steel interior and exterior

### **PERFORMANCE**

Max. ambient temp.

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

**GEMS** class

GEMS energy consumption 10.64 kWh/24h

GEMS annual running cost \$1165 p.a. (@ \$0.30/kWh)

#### **ELECTRICAL**

Electrical safety climate class

Interior lighting 2 × 1200 mm, 12W LED light (door activated) Power cord Supplied with 10 amp plug and 2 m lead Power supply 220-240 volts a.c. 50 Hz, single phase supply 5.0 amps (includes unit 4.6 amps)

Current draw

REFRIGERATION SCS Connect (SKOPE-connect<sup>™</sup> compatible) Controller

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable freezer cartridge (part number

UTKDNI-0037)

R290/105 g (natural refrigerant) Refrigerant

725 watts Nominal capacity

Heat rejection (Avg/peak) 450 watts/725 watts Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

DIMENSIONS			
	External	Internal	
Height	1985 mm*	1395 mm	
Width	1220 mm	1100 mm	
Depth	760 mm	600 mm	
Floor area	0.93 m <sup>2</sup>	•	
Weight	171 kg		
Gross volume	921 L		
Net volume	712 L		

<sup>\*</sup> With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985 mm
Height adjustable legs	1995 to 2035 mm
No castors or legs	1850 mm

Dimensional tolerances					
Before installing this cabinet allow the following dimensional tolerances:					
Linear dimensions	Overall cabinet dimensions				
Less than 1 metre	±5 mm				
More than 1 metre	-5 mm to +10 mm				
	Length of multiple cabinets				
	At each joint	At each end wall			
Less than 1 metre	±5 mm	+15 mm			
More than 1 metre	-5 mm to +10 mm	+15 mm			

Ventilation requirements		
Тор	300 mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

WA DEALER

PRACTICAL PRODUCTS PTY LTD