


## RF8.CBR.2.D4

ReFlex Series, 4 Drawer, Chef Base Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

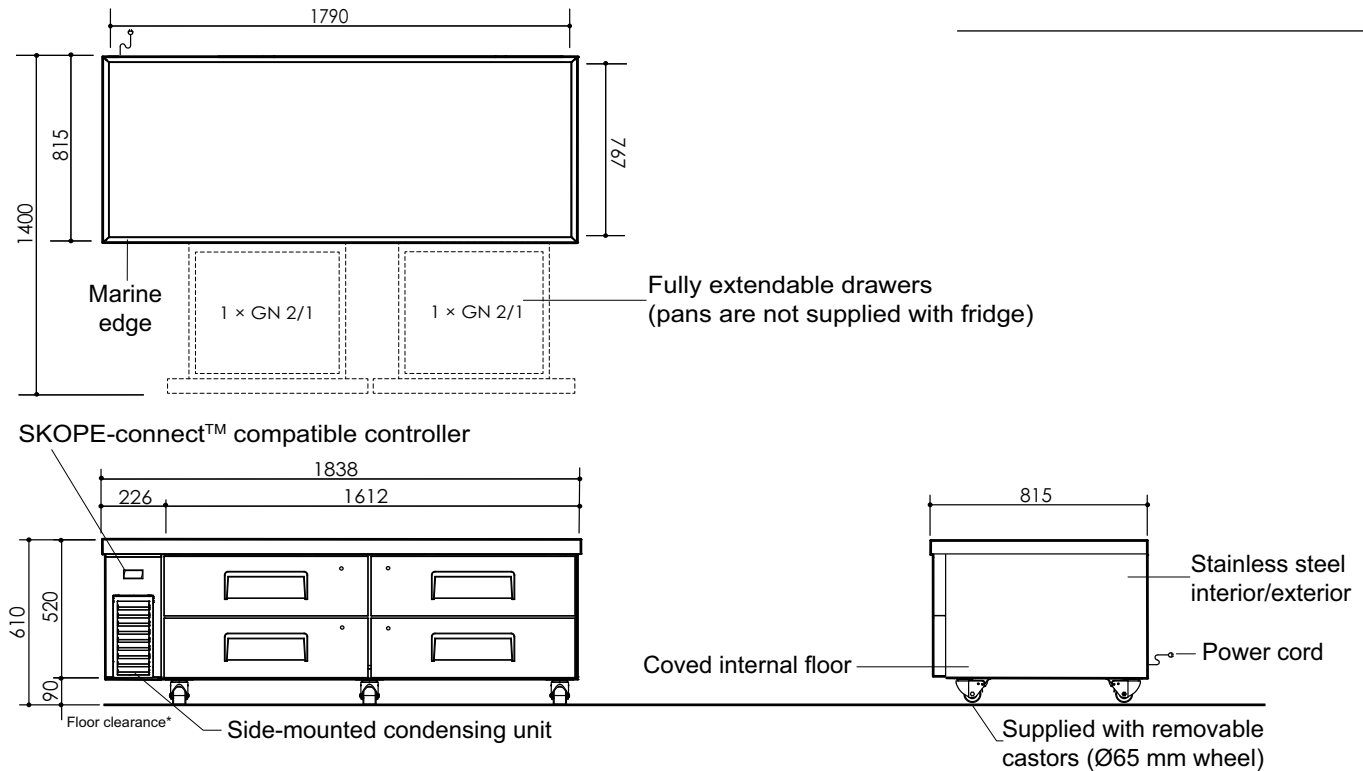

### CABINET

|          |                                                                                                                                                                                                                                           |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Drawers  | 4 × fully extendable, refrigerated, stainless steel drawers with individual key locks.<br>2 bank of full drawers including stainless steel sheet base and sides. Each drawer fits 1 × GN 2/1, 100 mm deep pan (not supplied with fridge). |
| Shelves  | n.a.                                                                                                                                                                                                                                      |
| Worktop  | Total thickness 45 mm (0.7 mm 304 AISI stainless steel over heat shield and insulating cyclopentane foamed core)                                                                                                                          |
| Material | 304 AISI stainless steel interior and exterior                                                                                                                                                                                            |

### PERFORMANCE

|                          |                                                        |
|--------------------------|--------------------------------------------------------|
| Max. ambient temp.       | 40°C                                                   |
| Temperature range        | 1°C to 4°C (adjustable with SKOPE-connect 0°C to 10°C) |
| GEMS class               | 5M1                                                    |
| GEMS energy consumption  | 4.40 kWh/24 h                                          |
| GEMS annual running cost | \$482 p.a. (@ \$0.30/kWh)                              |

### ELECTRICAL

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Electrical safety climate class | 5                                             |
| Interior lighting               | n.a.                                          |
| Power cord                      | Supplied with a 10 amp plug and 2 m lead      |
| Power supply                    | 220-240 volts a.c. 50 Hz, single phase supply |
| Current draw                    | 1.8 amps                                      |

### REFRIGERATION

|                           |                                                                           |
|---------------------------|---------------------------------------------------------------------------|
| Controller                | SCS Connect (SKOPE-connect™ compatible)                                   |
| Connectivity interface    | Bluetooth® wireless technology                                            |
| Refrigeration system      | Built-in, integral refrigeration system with side-mounted condensing unit |
| Refrigerant               | R290/100 g (natural refrigerant)                                          |
| Nominal capacity          | 650 watts                                                                 |
| Heat rejection (Avg/peak) | 185 watts/190 watts                                                       |
| Drainage                  | No plumbing required                                                      |

### DIMENSIONS

|              | External            | Internal |
|--------------|---------------------|----------|
| Height       | 600 mm*             | 379 mm   |
| Width        | 1838 mm             | 1510 mm  |
| Depth        | 815 mm              | 649 mm   |
| Floor area   | 1.50 m <sup>2</sup> |          |
| Weight       | 160 kg              |          |
| Gross volume | 371 L               |          |
| Net volume   | 118 L               |          |

\* With supplied castors fitted and excluding marine edge. See height variation below.

| Height variation                           |        |
|--------------------------------------------|--------|
| Supplied castors                           | 610 mm |
| Supplied castors and excluding marine edge | 600 mm |
| No castors                                 | 520 mm |

| Dimensional tolerances                                                     |                             |                  |
|----------------------------------------------------------------------------|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: |                             |                  |
| Linear dimensions                                                          | Overall cabinet dimensions  |                  |
| Less than 1 metre                                                          | ±5 mm                       |                  |
| More than 1 metre                                                          | -5 mm to +10 mm             |                  |
|                                                                            | Length of multiple cabinets |                  |
|                                                                            | At each joint               | At each end wall |
| Less than 1 metre                                                          | ±5 mm                       | +15 mm           |
| More than 1 metre                                                          | -5 mm to +10 mm             | +15 mm           |

| Ventilation requirements |                           |
|--------------------------|---------------------------|
| Top                      | Not required              |
| Sides                    | 100 mm for left side only |
| Back                     | Not required              |
| Bottom                   | Not required              |

SKOPE Industries Limited reserves the right to alter specifications without notice. Copyright © 2021

**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au

PSS0687 Rev. 1.6 Jul. 2023

