




Dimensions		Build		Technical	
External Width (mm)	597	Door Description	1 Solid Swing Door	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	794	Exterior Construction	Black powder coated steel front and sides. Stainless steel top. Galv rear.	Refrigerant	R134a
External Height (mm)	1010	Interior Construction	Stainless Steel floor. Galv sides.	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers. Height does not include 388 mm for draft tower.	Air Intake Position	Rear	Amps	1.2
Gross Volume (Litres)	227	Ventilation Position	Right side	60Hz model Amps	1.2
Unpackaged Weight (kg)	82	Clearance Required	26 mm rear, 26 mm right side.	Wattage	276
Packaged Weight (kg)	93	Cord Length (Meters)	2.13	60Hz model Wattage	276
Packaged Dimensions (W x D x H mm)	883 x 718 x 1143	Standard w/ Locks	standard	Defrost Type	Off-Cycle
Internal Capacity for Keg (L x D x H mm)	500 x 450 x 740				
Supplied Supports	Built-in 102 mm castors				

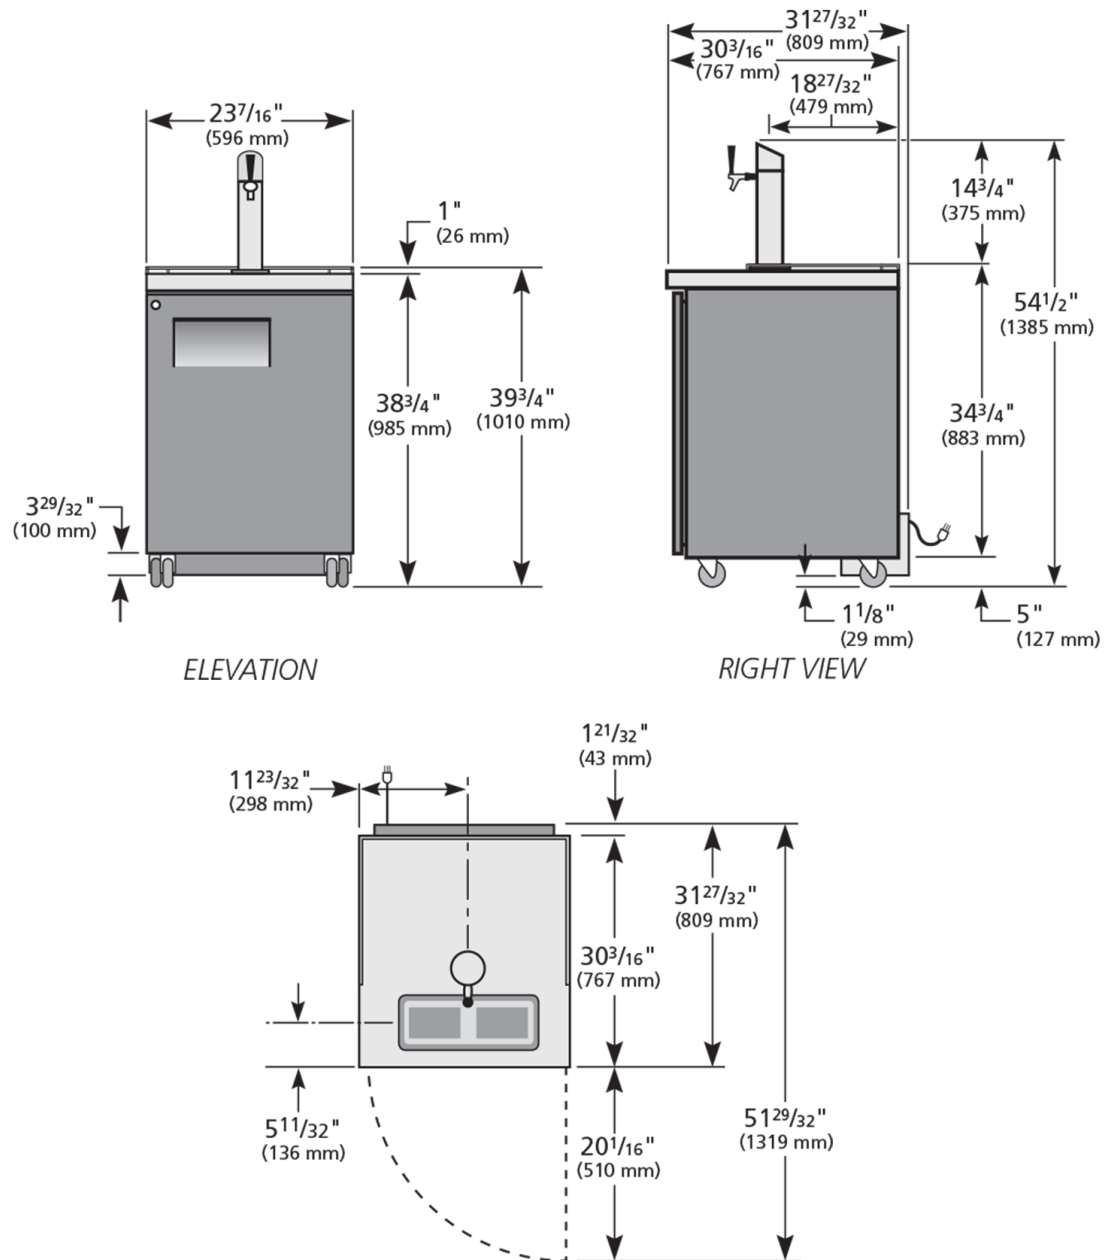

Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

TDD-1
 Keg Chiller / Dispenser, Black Ext, 1 Solid Swing Door


WARRANTY 5 YEARS
PARTS, COMPRESSOR AND LABOUR

 natural refrigerant.

Specifications subject to change without notice.
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

TRUE
REFRIGERATION