


# TRCB-82-84-HC


 Under-Equipment Refrigerator, 4 Drawers, Extended top



Dimensions		Build		Technical	
External Width (mm)	2134	Number of Drawers	4	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	816	Exterior Construction	Stainless steel front and top, aluminium sides and rear	Refrigerant	R290
External Height (mm)	648	Interior Construction	Clear coated aluminium, stainless steel base	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Air Intake Position	Front	Amps	2
Net Volume (Litres)	130	Ventilation Position	Right side	Wattage	460
Gross Volume (Litres)	496	Clearance Required	26 mm rear. Minimum clearance of 102 mm is required between bottom of cooking equipment heating element and the TRCB top.	Climate Class	5
Per Drawer Capacity (max depth mm)	Left: 3x 1/1 GN + Right: 2x 1/1 GN (100)			Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Unpackaged Weight (kg)	204	Cord Length (Meters)	2.13	Testing Standard	EN 16825
Packaged Weight (kg)	215	Max Weight Supported (kg)	492	EEC	D
Packaged Dimensions (W x D x H mm)	2388 x 914 x 762	Standard w/ Locks	Not standard (build option)	EI	63.1
Supplied Supports	ø 102 mm castors (127 mm height)			kWh/24hr	3.671
				kWh/Annum	1340
				Defrost Type	Auto

# TRCB-82-84-HC

 Under-Equipment Refrigerator, 4 Drawers, Extended top

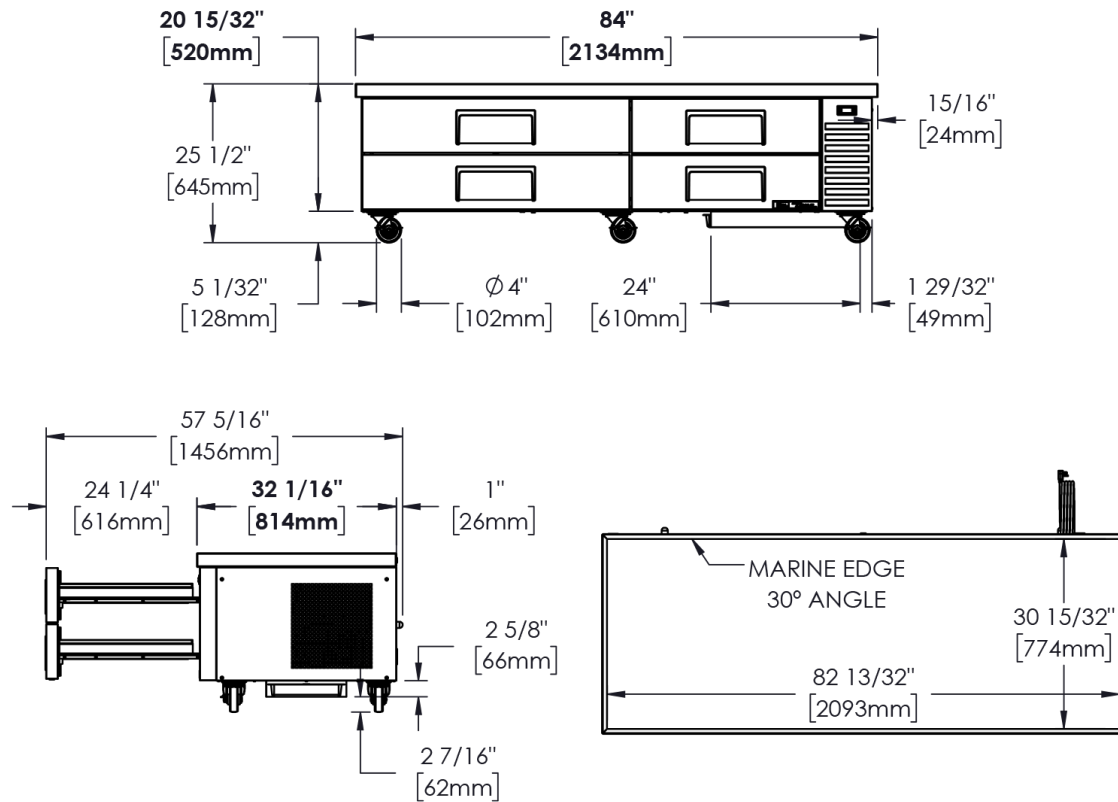

**WARRANTY** 5 YEARS  
 PARTS, COMPRESSOR AND LABOUR



Specifications subject to change without notice.  
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
 51 Paramount Dr Wangara WA 6065  
[sales@practicalproducts.com.au](mailto:sales@practicalproducts.com.au)  
[www.practicalproducts.com.au](http://www.practicalproducts.com.au)

**TRUE**  
 REFRIGERATION