

# TUC-67D-4-HC


 Deep Undercounter Refrigerator, 4 Drawers




Dimensions		Build		Technical	
External Width (mm)	1709	Number of Drawers	4	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	818	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Refrigerant	R290
External Height (mm)	839	Interior Construction	Clear coated aluminium, stainless steel base	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Air Intake Position	Front	Amps	1.3
Net Volume (Litres)	205	Ventilation Position	Front	Wattage	299
Gross Volume (Litres)	585	Clearance Required	Zero back and sides	Climate Class	5
Per Drawer Capacity (max depth mm)	1x 2/1 GN (200)	Cord Length (Meters)	2.13	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Unpackaged Weight (kg)	207	Standard w/ Locks	Not standard (SPEC3 option)	Testing Standard	EN 16825
Packaged Weight (kg)	218			EEC	A
Packaged Dimensions (W x D x H mm)	1880 x 966 x 1245			EEL	24.8
Supplied Supports	ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm)			kWh/24hr	1.56
				kWh/Annum	573
				Defrost Type	Auto



Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

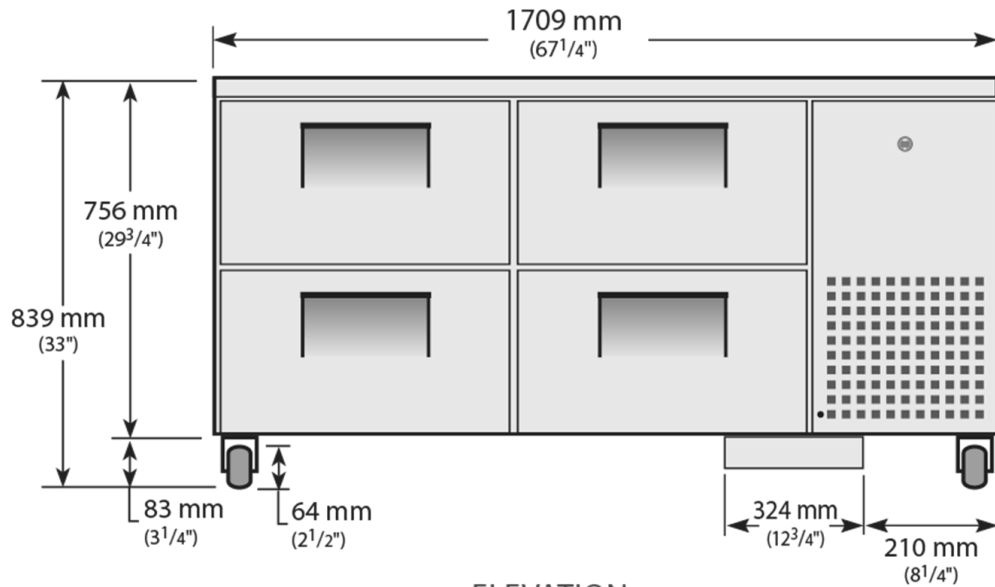**TUC-67D-4-HC**
 Deep Undercounter Refrigerator, 4 Drawers


ELEVATION

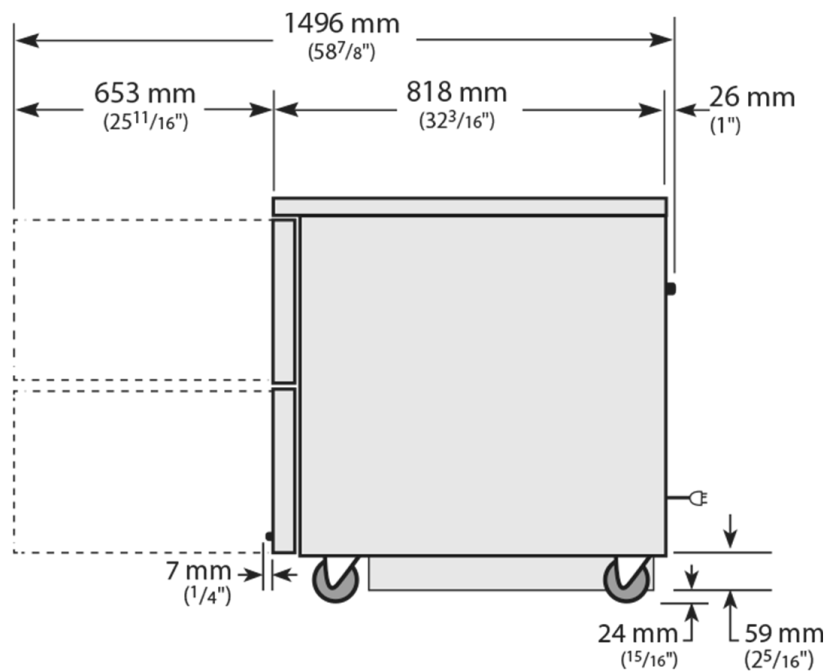

RIGHT VIEW



Specifications subject to change without notice.  
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
 51 Paramount Dr Wangara WA 6065  
 sales@practicalproducts.com.au  
 www.practicalproducts.com.au

