

TWT-60D-4-HC

 Worktop Counter Refrigerator, 4 Drawers



Dimensions		Build		Technical	
External Width (mm)	1534	Number of Drawers	4	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	766	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Refrigerant	R290
External Height (mm)	1004	Interior Construction	Clear coated aluminium, stainless steel base	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Air Intake Position	Front	Amps	1.3
Net Volume (Litres)	78	Ventilation Position	Front	Wattage	299
Gross Volume (Litres)	439	Clearance Required	Zero back and sides	Climate Class	5
Per Drawer Capacity (max depth mm)	1x 1/1 GN (150)	Cord Length (Meters)	2.13	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Unpackaged Weight (kg)	175	Standard w/ Locks	Standard	Testing Standard	EN 16825
Packaged Weight (kg)	186			EEC	C
Packaged Dimensions (W x D x H mm)	1601 x 839 x 1207			EEL	46.5
Supplied Supports	ø 127 mm castors (158 mm height)			kWh/24hr	2.53
				kWh/Annum	926
				Defrost Type	Auto




Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



TWT-60D-4-HC

Worktop Counter Refrigerator, 4 Drawers

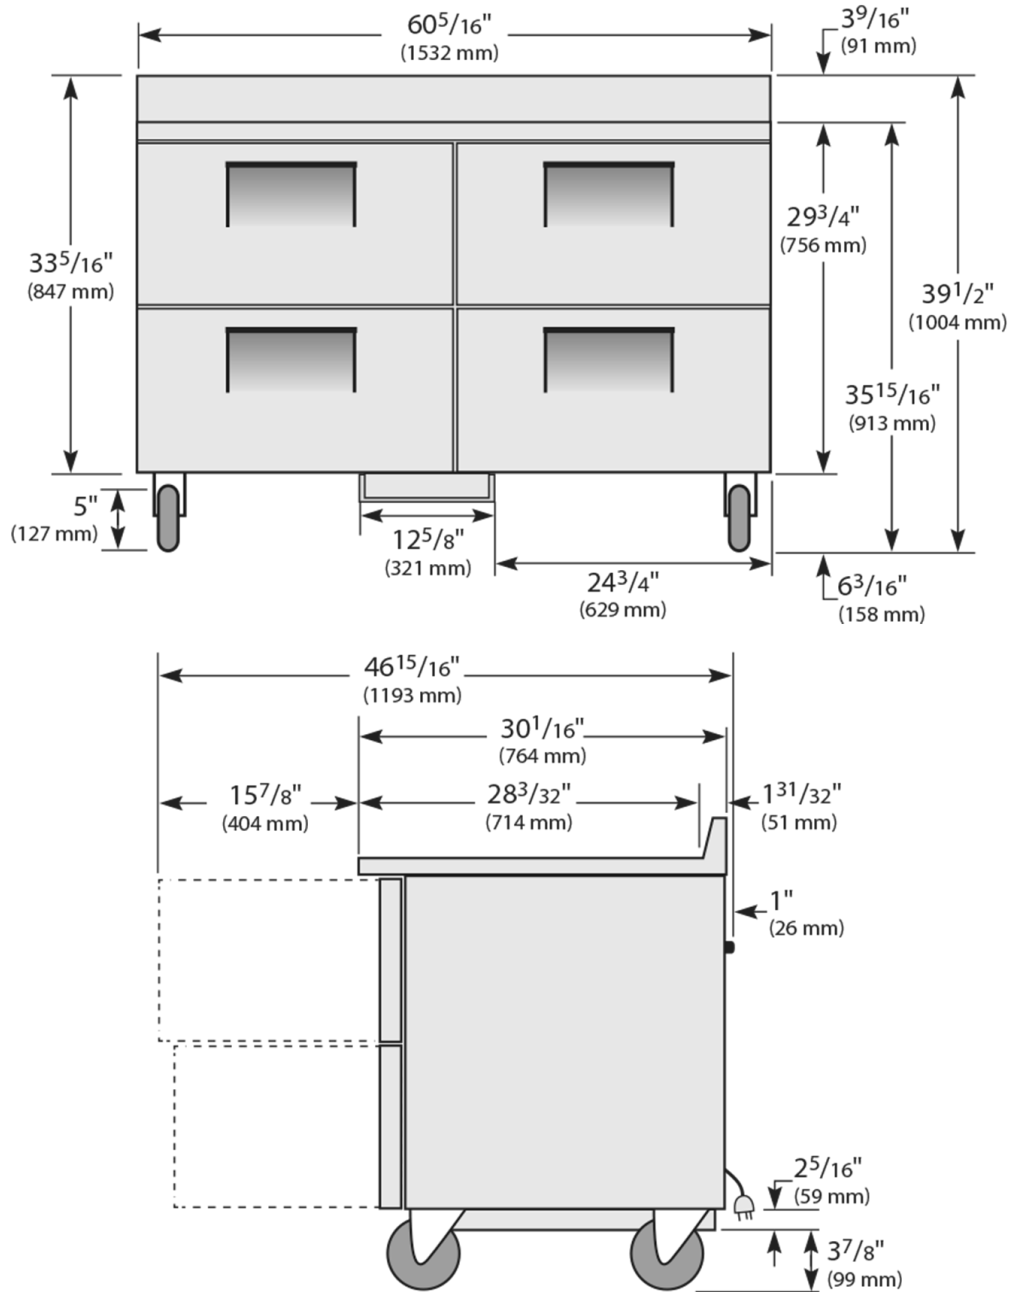

WARRANTY
PARTS, COMPRESSOR AND LABOUR
5 YEARS*

natural refrigerant.

Specifications subject to change without notice.
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

WA DEALER
PRACTICAL PRODUCTS PTY LTD

