

🞦 Deep Worktop Counter Refrigerator, 4 Drawers





Dimensions		Build		Technical	
External Width (mm)	1709	Number of Drawers	4	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	823	Exterior Construction	Stainless steel front & countertop, aluminium sides &	Refrigerant	R290
External Height (mm)	1004	Interior Construction	rear Clear coated aluminium, stainless steel base Front Front	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	include 26 mm for			Amps Wattage	299
Net Volume (Litres)	rear bumpers. 205	Air Intake Position Ventilation Position		Climate Class	5
Gross Volume (Litres)	585	Clearance Required	Zero back and sides	Operating Statement	Heavy Duty: This appliance is intended for use in ambient
Per Drawer Capacity (max	1x 2/1 GN (200)	Cord Length (Meters)	2.13	Testing Chanderd	temperatures up to 40°C. EN 16825
depth mm)		Standard w/ Locks	Not standard (SPEC3 option)	Testing Standard EEC	EN 16825
Unpackaged Weight (kg)	175			EEI	24.8
Packaged Weight (kg)	186			kWh/24hr	1.56
Packaged Dimensions (W x D	1880 x 966 x 1245			kWh/Annum	573
x H mm)	1000 X 900 X 1245			Defrost Type	Auto
Supplied Supports	ø 127 mm castors (158 mm height)				



Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")




Counters & Undercounters





🔛 Deep Worktop Counter Refrigerator, 4 Drawers

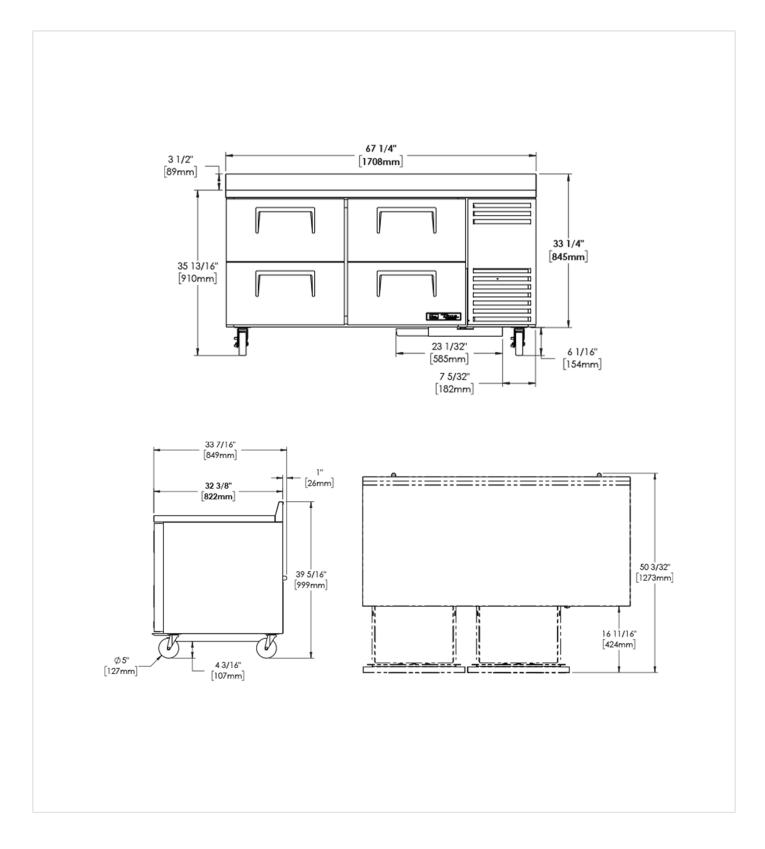



Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

WA DEALER PRACTICAL PRODUCTS PTY LTD