

Technical data sheet for

## **E23T3 DOUBLE STACKED**

Half Size Electric Convection Ovens TOUCH SCREEN CONTROL  
Double Stacked on a Stainless Steel Base Stand



Model E23T3/2C shown



### E23T3/2 E23T3/2C

E23T3 ovens shall be Moffat electrically heated Turbofan convection ovens. The ovens shall have a one piece vitreous enameled oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Ovens shall have capacity for three half size sheet pans. The ovens shall have 2.8kW heating elements. The ovens shall have a bi-directional single reversing fan system and feature a single halogen oven lamp. The oven shall feature a programmable Touch Screen menu controller. Ovens shall be fitted with a 15A plug-in cordset. Ovens shall be double stacked using Double Stacking Kits DSK23T (adjustable feet option) or DSK23TC (castor option). Units shall be supplied in 100% recyclable shipping packaging.

Double stack models are supplied as two individual ovens and a double stacking kit for field assembly.

E23T3/2 - Double stack with adjustable feet base stand

E23T3/2C - Double stack with castor base stand

### DOUBLE STACK FEATURES

- Two half size ovens
- Compact 745mm width
- Full stainless steel base stand
- Full stainless steel oven spacer frame
- Adjustable feet or castor models
- Guard rail for bottom oven

### OVEN FEATURES (each)

- 3 460mm x 330mm / 18" x 13" half size sheet pan capacity
- 3 GN 2/3 pan capacity
- 85mm tray spacing
- Touch Screen control
- Icon driven program menu
- USB port for program/icon updating
- Individual shelf timers
- Multi-stage programs
- Steam injection mode and manual injection
- Bi-directional reversing fan system
- 2.8kW heating
- 15A plug-in cordset fitted
- Vitreous enameled oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Halogen oven lamp
- Dia. 180mm full stainless steel oven fan
- 3 oven wire racks supplied

# turbofan®

**E23T3/2  
E23T3/2C**

**E23T3/2 E23T3/2C Half Size  
Electric Convection Ovens  
TOUCH SCREEN CONTROL  
Double Stacked on a Stainless  
Steel Base Stand**

**CONSTRUCTION - OVENS**

Vitreous enameled fully welded oven chamber  
Stainless steel front, sides and top exterior  
Stainless steel oven fan baffle and oven vent  
Removable 3 position chrome plated wire side racks  
Oven racks chrome plated wire (3 supplied)  
Stainless steel frame drop down hinged door  
5mm thick door outer glass  
5mm thick low energy loss door inner glass  
Heavy-duty counterbalanced door hinges  
Wear resistant powder coated welded door handle  
Stainless steel control panel  
Aluminised coated steel base and rear panels

**CONSTRUCTION - DOUBLE STACKING KIT**

All stainless steel construction  
Welded 38mm and 32mm square tube front and rear frame  
base stand  
4 adjustable feet on E23T3/2  
4 dia. 76mm swivel castors with 2 front castors dual wheel  
and swivel lock on E23T3/2C  
Stainless steel oven spacer frame  
Stainless steel bottom oven vent extension

**CONTROLS (each oven)**

5.7" LED backlit touch screen  
Icon driven program menu  
BMP image icon imports via USB port  
Temperature range 50-260°C  
Individual shelf timers  
Multi-stage programs  
Over-temperature safety cut-out

**CLEANING**

Stainless steel top and sides continuous exterior panel  
Vitreous enameled oven chamber  
Fully removable chrome plated oven side racks  
Removable stainless steel oven fan baffle  
Full stainless steel oven fan  
Easy clean door system with hinge out door inner glass  
(no tools required)  
Removable plug-in oven door seal (no tools required)  
76mm high stainless steel feet for easy access underside

**SPECIFICATIONS**

Electrical Requirements (each oven)  
230-240V, 50Hz, 1P+N+E, 3kW, 12A  
15A cordset fitted

Water Requirements (optional)  
Cold water connection ¾" BSP male  
80psi maximum inlet pressure / 20psi minimum inlet pressure

**External Dimensions**

Width 745mm  
Height 1571mm (E23T3/2)  
1653mm (E23T3/2C)  
Depth 643mm

**Oven Internal Dimensions (each oven)**

Width 495mm  
Height 305mm  
Depth 340mm  
Volume 0.51m<sup>3</sup>

**Oven Rack Dimensions**

Width 460mm  
Depth 330mm

**Nett Weight (double stack complete)**

99kg

**Packing Data (E23T3 ovens each)**

54.6kg  
0.36m<sup>3</sup>  
Width 755mm  
Height 585mm  
Depth 810mm

**Packing Data (Stacking Kit)**

15kg (DSK23T - adjustable feet)  
18kg (DSK23TC - castor)  
0.08m<sup>3</sup>  
Width 590mm  
Height 840mm  
Depth 160mm

Supplied CKD for assembly on site

**INSTALLATION CLEARANCES**


Rear 25mm  
LH Side 25mm  
RH Side 25mm

**CLEARANCE FROM SOURCES OF HEAT**

A minimum distance of 300mm from the appliance sides is required

**Double Stacking Kits**

For after market double stacking two E23T3 convection ovens  
DSK23T - Double stacking kit - adjustable feet  
DSK23TC - Double stacking kit - castor

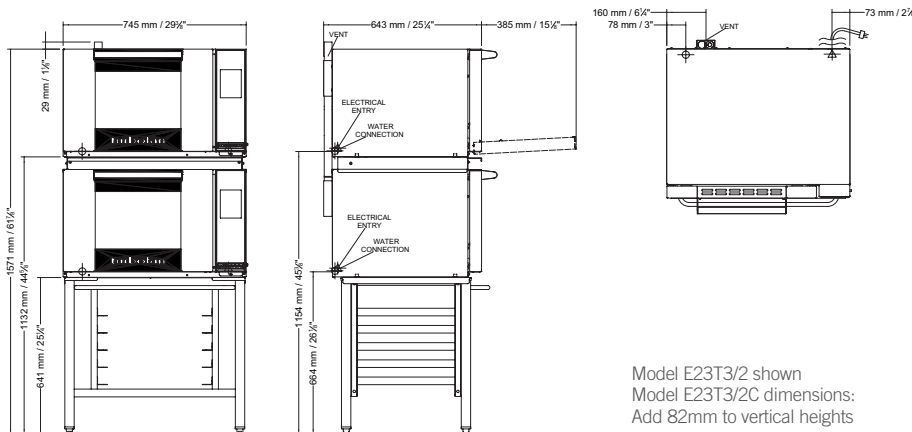

Model E23T3/2 shown  
Model E23T3/2C dimensions:  
Add 82mm to vertical heights

