

Technical data sheet for

## **E27T2 DOUBLE STACKED**

Full Size Electric Convection Ovens TOUCH SCREEN CONTROL  
Double Stacked on a Stainless Steel Base Stand



Model E27T2/2C shown



### **E27T2/2 E27T2/2C**

E27T2 ovens shall be Moffat electrically heated Turbofan convection ovens E.T.L. listed and NSF-4 listed. The ovens shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Ovens shall have capacity for two full size sheet pans. The ovens shall have 2.8kW heating elements for 220-240V models or 2.5kW heating elements for 208V models. The ovens shall have a bi-directional single reversing fan system and feature a single halogen oven lamp. The oven shall feature a programmable Touch Screen menu controller. Ovens shall be fitted with a NEMA 6-15P cordset. Ovens shall be double stacked using Double Stacking Kits DSK2728T (adjustable feet option) or DSK2728TC (castor option). Units shall be supplied in 100% recyclable shipping packaging.

Double stack models are supplied as two individual ovens and a double stacking kit for field assembly.

E27T2/2 - Double stack with adjustable feet base stand

E27T2/2C - Double stack with castor base stand

### **DOUBLE STACK FEATURES**

- Two full size ovens
- 945mm width
- Full stainless steel base stand
- Full stainless steel oven spacer frame
- Adjustable feet or castor models
- Guard rail for bottom oven

### **OVEN FEATURES (each)**

- 2 460mm x 660mm / 18" x 26" full size sheet pan capacity
- 2 400mm x 600mm tray capacity
- 115mm tray spacing
- Touch Screen control
- Icon driven program menu
- USB port for program/icon updating
- Individual shelf timers
- Multi-stage programs
- Steam injection mode and manual injection
- Bi-directional reversing fan system
- 2.8kW heating
- 15A plug-in cordset fitted
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Dual halogen oven lamps
- Dia. 180mm full stainless steel oven fan
- 2 oven wire racks supplied

# turbofan®

**E27T2/2 E27T2/2C Full Size  
Electric Convection Ovens  
TOUCH SCREEN CONTROL  
Double Stacked on a Stainless  
Steel Base Stand**

**CONSTRUCTION - OVENS**

Vitreous enameled fully welded oven chamber  
Stainless steel front, sides and top exterior  
Stainless steel oven fan baffle and oven vent  
Removable 2 position chrome plated wire side racks  
Oven racks chrome plated wire (2 supplied)  
Stainless steel frame drop down hinged door  
0.2" / 5mm thick door outer glass  
0.2" / 5mm thick low energy loss door inner glass  
Heavy-duty counterbalanced door hinges  
Wear resistant powder coated welded door handle  
Stainless steel control panel  
Aluminised coated steel base and rear panels

**CONSTRUCTION - DOUBLE STACKING KIT**

All stainless steel construction  
Welded 1½" and 1¼" square tube front and rear frame  
base stand  
4 adjustable feet on E27T2/2  
4 dia. 3" / 76mm swivel castors with 2 front castors dual  
wheel and swivel lock on E27T2/2C  
Stainless steel oven spacer frame  
Stainless steel bottom oven vent extension

**CONTROLS (each oven)**

5.7" LED backlit touch screen  
Icon driven program menu  
BMP image icon imports via USB port  
Temperature range 150-500°F / 50-260°C  
Individual shelf timers  
Multi-stage programs  
Over-temperature safety cut-out

**CLEANING**

Stainless steel top and sides continuous exterior panel  
Vitreous enameled oven chamber  
Fully removable chrome plated oven side racks  
Removable stainless steel oven fan baffle  
Full stainless steel oven fan  
Easy clean door system with hinge out door inner glass  
(no tools required)  
Removable plug-in oven door seal (no tools required)

**SPECIFICATIONS**

Electrical Requirements (each oven)  
230-240V, 50Hz, 1P+N+E 3.0kW, 12A  
15A cordset fitted

**Water Requirements (optional)**

Cold water connection ¾" BSP male  
80psi maximum inlet pressure / 20psi minimum inlet pressure

**External Dimensions**

Width 945mm  
Height 1571mm (E27T2/2)  
1653mm (E27T2/2C)  
Depth 762mm

**Oven Internal Dimensions (each oven)**

Width 695mm  
Height 305mm  
Depth 470mm  
Volume 0.10m<sup>3</sup>

**Oven Rack Dimensions**

Width 660mm  
Depth 460mm

**Nett Weight (double stack complete)**

141kg

**Packing Data (E27T2 ovens each)**

77.8kg  
0.57m<sup>3</sup>  
Width 875mm  
Height 640mm  
Depth 1010mm

**Packing Data (Stacking Kit)**

19kg (DSK2728T - adjustable feet)  
22kg (DSK2728TC - castor)  
0.08m<sup>3</sup>  
Width 590mm  
Height 840mm  
Depth 160mm

**Supplied CKD for assembly on site**

**INSTALLATION CLEARANCES**


Rear 25mm  
LH Side 25mm  
RH Side 25mm

**CLEARANCE FROM SOURCES OF HEAT**

A minimum distance of 300mm from the appliance sides is required

**Double Stacking Kits**

For after market double stacking two E27T2 convection ovens  
DSK2728T - Double stacking kit - adjustable feet  
DSK2728TC - Double stacking kit - castor

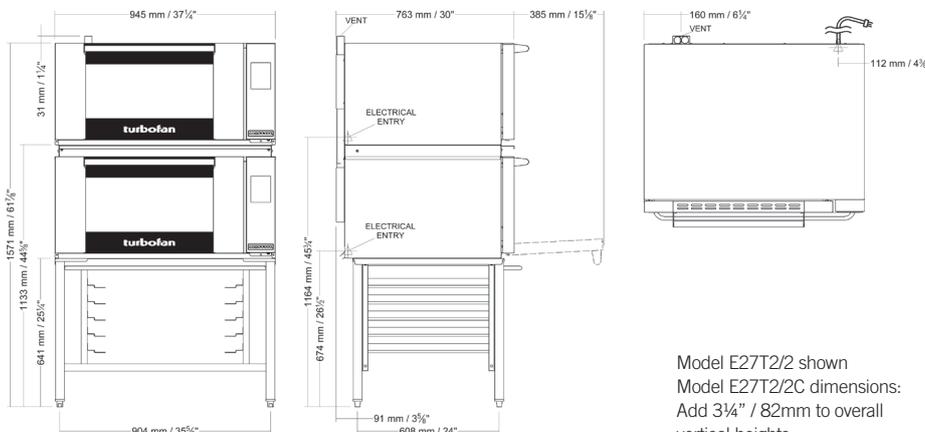

Model E27T2/2 shown  
Model E27T2/2C dimensions:  
Add 3¼" / 82mm to overall  
vertical heights

