
specifications



PG500HF

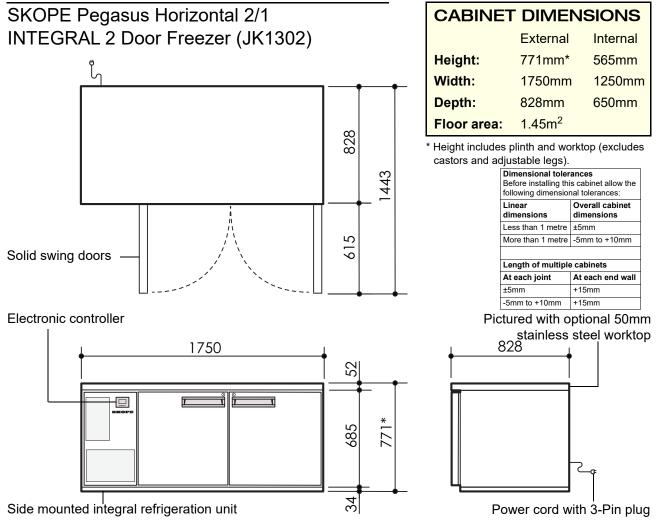

Copyright © 2012 SKOPE Industries Limited

CABINET SPECIFICATIONS	
Refrigeration system:	Electronic controlled, side mounted, integral refrigeration unit
Refrigerant:	R452A / 850g
Nominal capacity:	364 Watts @ -30°C SST
Cabinet internal volume:	480 litres
Insulation:	60mm thick, high density cyclo-isopentane polyurethane foam
Cabinet temperature range:	-18°C to -21°C up to 43°C ambient
Drainage:	No plumbing required
Electrical:	230-240 Volts a.c. 50 Hz, 4.75 Amps
Internal lighting:	n.a.
Internal door opening size:	2 door openings: 565mm high x 565mm wide
Door:	Solid stainless steel, self-closing doors (with key lock) - LH & RH hinged
Worktop (optional):	Optional 50mm square edged stainless steel worktop
Shelves:	Two levels of non-tip, adjustable tray slides and/or shelves per door
Weight:	147 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.



WA DEALER PRACTICAL PRODUCTS PTY LTD PSS0318 Rev 3.1 Nov. 2019



PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au