

TURBOFAN G32D4 GAS OVEN | INSTRUCTIONS

Installation & Connection –

(To be installed in compliance with AGA & local gas regulations)

Natural/LPG Piped Connection:

- Obtain qualified installation

L.P.G Gas Bottle Connection:

- Unit must be installed in areas with adequate ventilation
- Connect to the gas supply
- If you suspect a gas leak, check connections only with soapy water or a gas leak detector. If using soapy water, bubbles should appear at the leak point.
- **CONTACT CATERALL TO FIX.**

Operation –


- 1) Ensure gas supply is on and power supply is connected and on
- 2) Press the ON/OFF button
 - Burners will light up (check view hole in lower front panel)
 - 150°C will show on screen
 - Press again if failed to light
- 3) Oven pre-heats to 150°C. To adjust – rotate “TEMP” dial (- or +) to adjust accordingly
- 4) To view actual oven temperature, press “TEMP” button and after 5 seconds, the screen will revert back to the oven set temperature
- 5) To turn light ON/OFF, press the “LIGHT” button
- 6) Turn unit OFF by pressing “ON/OFF” button for 1.5 seconds
- 7) Disconnect gas and power supplies

Note: Steam button not applicable on this oven

Set Timer –

Note: Oven can be used without timer

- 1) Turn timer dial (- or +) to select required time. Required maximum is 180 minutes, minimum 1 minute.
- 2) Timer can be set to infinity (INF) where it will count elapsed time from 999 minutes. This is shown on the lower screen.
- 3) When cooking set time is complete, alarm will sound and lower screen will flash.
- 4) Press “START/STOP” button to cancel alarm. Oven will continue to cook at set temperature

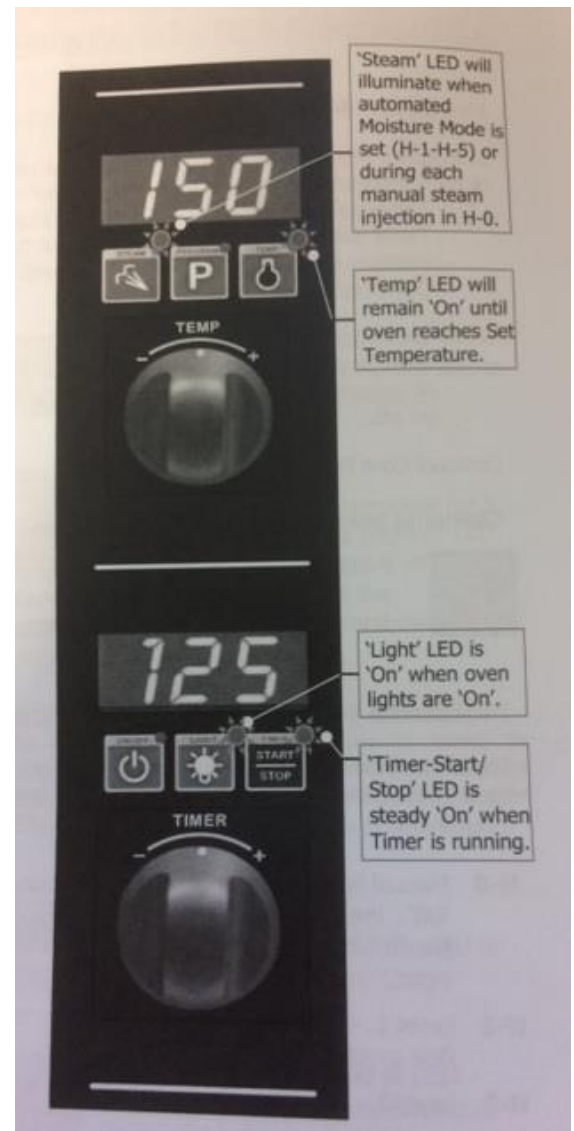

Should you have any queries, please contact us on 9377 3325.