



CB1265A



Self-contained ice maker - Sprayer system Daily production up to 134 kg

Brema's CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB1265A is a free-standing ice cube machine that produces 130kg of ice per 24 hours and has storage capacity of 65kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.

Features

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C rated
- Cleanable antiscale filter
- Air cooling system
- Easy cleanable internal rounded surfaces HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- 65kg storage capacity
- Produces 13g cubes















- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)





AISI 304 SS Scotch Brite finish



Adjustable Stainless Steel feet



Removable and cleanable air filter



Easy cleanable internal rounded surfaces



Disappearing insulated door

Ice cube size



Production 24h

	Air temp.	Water temp.	kg
	10° C	7° C	134
,	21° C	15° C	130
	32° C	21° C	106

3 Years Warranty

Certifications available for this model












































CB1265A



Self-contained ice maker - Sprayer system Daily production up to 134 kg

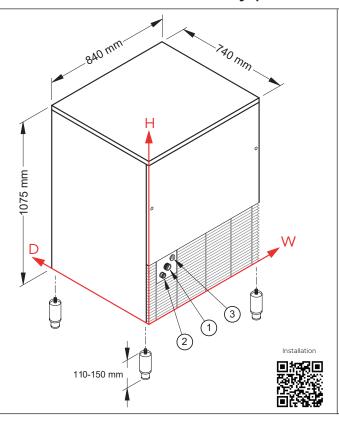

Working conditions

Location: Indoor

	Min	Max
Ambient temperature	+10°C	+43°C
Water temperature	+3°C	+32°C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

WA DEALER PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

Connections

All measures are referred to the rear bottom-left corner (W-H-Ø)

(1) Water in.: 141mm - 290mm - 3/4" (2) Water out.: 79mm - 245mm - 24mm

(3) Electrical connections.: 186mm - 326mm

Technical Information

Production in 24h	130kg
Store capacity, up to	65kg
Cooling system	А
Kind of cube (standard)	D-13g
Kind of cube (non-stock)	A-18g, C-33g, E-42g, B-60g
Refrigerant	R452A
Standard voltage	240V ~ 50 Hz - 15A (lead with plug supplied)
Energy consumption	1050W
Fuse	16A

All the technical information need to be considered at the following conditions: Sizes without feet

Standard Cube (13 g)

Ambient temperature +21°C Water temperature +15°C

Average power consumption at +43°C (standard voltage)

Finish	AISI 304 stainless steel
Clearance	100mm sides + back
Water consumption	A: 2.8I/kg
Sizes (W-D-H)	840 - 740 - 1075
Sizes with pack (W-D-H)	880 - 785 - 1245
Net weight	113kg
Gross weight	133kg

Models and specifications are subject to change without notice