

specifications

PG200HC

Pegasus Horizontal 2/1
INTEGRAL, 1 Door, Fridge




SKOPE[®]
Refrigeration


CABINET DIMENSIONS

| | External | Internal |
|---------------------|--------------------|----------|
| Height | 771mm* | 565mm |
| Width | 1065mm | 565mm |
| Depth | 828mm | 650mm |
| Floor area | 0.88m ² | |
| Gross volume | 210L | |
| Net volume | 125L | |

* Height includes plinth and worktop (excludes castors and adjustable legs).

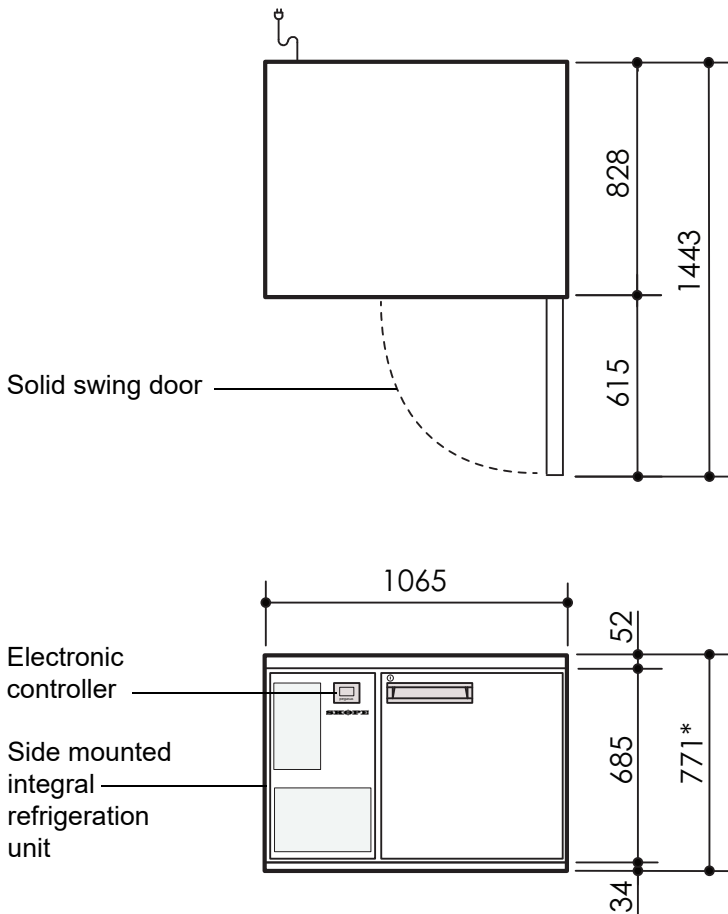

Pictured with optional 50mm
stainless steel worktop

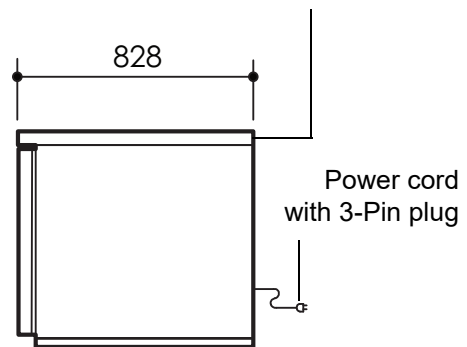

CABINET SPECIFICATIONS

| | |
|--|---|
| Door | Solid stainless steel, self-closing door (with key lock) - RH hinged |
| Internal door opening size | 1 door opening: 565mm high x 565mm wide |
| Shelves | Two levels of non-tip, adjustable tray slides and/or shelves per door |
| Worktop (optional) | Optional 50mm square edged stainless steel worktop |
| Weight | 120 kg |
| Electrical safety climate class | 5 |
| Internal lighting | n.a. |
| Electrical | 230-240 Volts a.c. 50 Hz, 2.54 Amps |
| Temperature range | +1°C to +4°C up to 40°C ambient |
| GEMS class | 5M1 |
| GEMS energy consumption | 4.14 kWh/24h |
| GEMS annual running cost | \$454 p.a. (@ \$0.30/kWh) |
| Refrigeration system | Electronic controlled, side mounted, integral refrigeration unit |
| Refrigerant | R134a / 450g |
| Nominal capacity | 447 Watts @ -10°C SST |
| Insulation | 60mm thick, high density cyclo-isopentane polyurethane foam |
| Drainage | No plumbing required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2012 SKOPE Industries Limited

PSS0195 Rev 2.2 Mar. 2021



WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

