specifications






PG400Prepr-2

SKOPE Gen2 Pegasus Horizontal 1/1 REMOTE 3 Door Prep Chiller (JH8303)



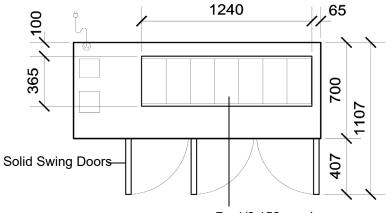

7 x 1/3 150mm deep pans


CABINET DIMENSIONS


External Internal Height: 751mm* 570mm Width: 1649mm 1301mm Depth: 700mm 545mm 1.15m² Floor area:

Height excludes castors or legs.

Dimensional tolerances Before installing this cabinet allow the following dimensional tolerances:	
Linear dimensions	Overall cabinet dimensions
Less than 1 metre	±5mm
More than 1 metre	-5mm to +10mm
Length of multiple cabinets	
At each joint	At each end wall
±5mm	+15mm
-5mm to +10mm	+15mm

Electronic Controller

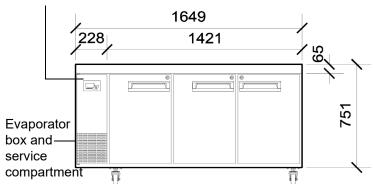



CABINET SPECIFICATIONS

Refrigeration system: Electronic controlled, side mounted, remote refrigeration unit

Electronic controller: CAREL ir33 electronic controller

Refrigerant: Thermostatic expansion valve fitted to suit R134a/R404A/R452A

Pipe connection size: Liquid line: 1/4". Suction line: 3/8"

Remote refrigeration duty: 706 Watts @ -10°C SST

Cabinet internal volume: 410 litres

Insulation: 60mm thick, high density cyclo-isopentane polyurethane foam

Cabinet temperature range: +1°C to +5°C up to 30°C ambient

Drainage: Evaporator drain fitted inside service compartment (requires plumbing)

Electrical: 230-240 Volts a.c. 50 Hz, 4.70 Amps

Internal lighting: 2 x 5W T8 LED tubes (Ø26 x 360mm) - Door activated

Internal door opening size: 3 door openings: 570mm high x 365mm wide

Doors: Solid stainless steel, self-closing doors (with key lock) - LH & RH hinged

Worktop: Accepts 7 x 1/3 150mm deep pans or 14 x 1/6 150mm deep pans Shelves: Two levels of non-tip, adjustable tray slides and/or shelves per door

Weight: 145 kg

www.intlcert.com

SKOPE Industries Limited reserve the right to alter specifications without notice.





