

PG500Prepr

SKOPE Pegasus Horizontal 2/1
REMOTE 2 Door Prep Chiller (JK8302)

CABINET DIMENSIONS

	External	Internal
Height:	771mm*	495mm
Width:	1750mm	1250mm
Depth:	828mm	650mm
Floor area:	1.45m ²	


* Height includes plinth and worktop (excludes castors and adjustable legs).

7 x 1/3 150mm deep pans with 2 pan lids.
Pan lids must be in place when pans not in use.

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	Length of multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5mm	±5mm	+15mm
More than 1 metre	-5mm to +10mm	-5mm to +10mm	+15mm

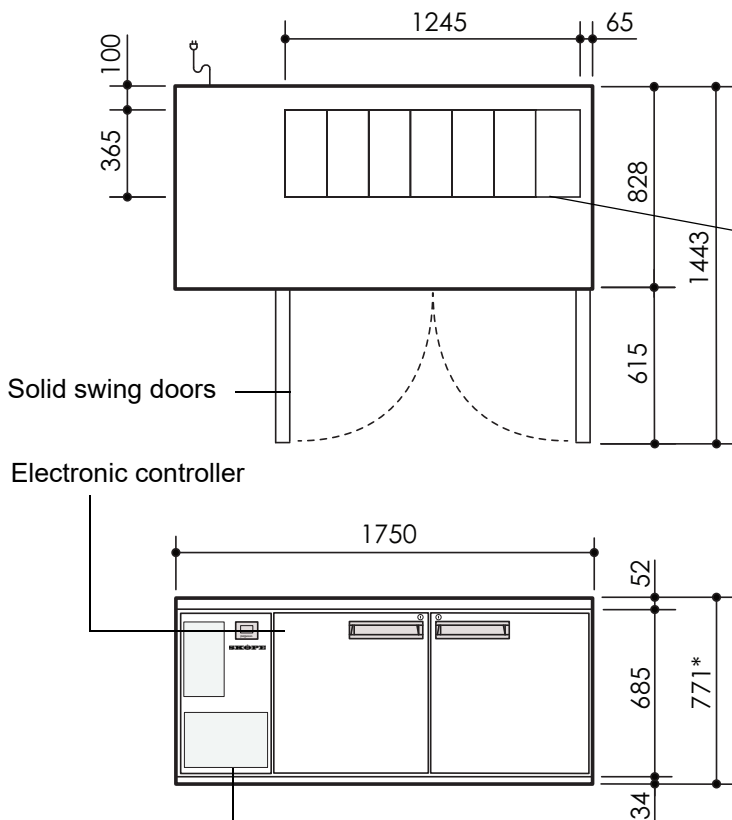

Solid swing doors

Electronic controller

Side mounted remote refrigeration unit

Power cord with 3-Pin plug

Copyright © 2012 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Electronic controlled, side mounted, remote refrigeration unit
Refrigerant:	Thermostatic expansion valve fitted to suit R134a/R404A/R452A
Pipe connection size:	Liquid line: 1/4". Suction line: 3/8"
Remote refrigeration duty:	706 Watts @ -10°C SST
Cabinet internal volume:	480 litres
Insulation:	60mm thick, high density cyclo-isopentane polyurethane foam
Cabinet temperature range:	+1°C to +5°C up to 30°C ambient
Drainage:	Evaporator drain fitted inside service compartment (requires plumbing)
Electrical:	230-240 Volts a.c. 50 Hz, 0.49 Amps
Internal lighting:	n.a.
Internal door opening size:	2 door openings: 565mm high x 565mm wide
Doors:	Solid stainless steel, self-closing doors (with key lock) - LH & RH hinged
Worktop:	Worktop accepts 7 x 1/3 150mm deep pans
Shelves:	2 shelves & adjustable tray slides per door (530mm wide x 650mm deep)
Weight:	135 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0233 Rev. 4.4 Nov. 2019