

SYNTHESIS 12/100 ELECTRIC CONVEYOR OVEN 2SV4504A



SPECIFICATIONS

Voltage	Trifase, 400 Vac 50-60 Hz
	Current at 400V 3N~ 73 Amp
Max Power	44900 Watts
Weight	450 kg
Plug Supplied	No, lead only
Noise level	<70 Decibel
Conveyor Width	40" (1010 mm)
Conveyor Length	2330mm
Chamber Length	1300mm
Chamber Height	100mm
Cable Length	2me
Time Range	2:20 - 30 minutes or complete halt
Thermostat	320°C
Ambient Temp	0 - 40°C
Max Humidity	95% Humidity without condensation
Warranty	4 Year Warranty (2 yr Labour 4 yr Parts)

DIMENSIONS

External Width	2450mm	Internal Width	1300mm
External Depth	1820mm	Internal Depth	1000mm
External Height	720mm	Internal Height	100mm




Main Features

- Made entirely from stainless steel
- Double glazed full width inspection door
- Easy access for thorough cleaning
- Cooling system for contact parts
- Omnidirectional wheels with breaks
- Conveyor belt with variable speed down to a complete halt
- 100 mm high cooking chamber
- Fine tuning of the ventilation flow
- Jets of hot air completely wrap the product as it moves along the wire mesh conveyer giving an evenly cooked result time after time
- All Synthesis ovens are stackable so you can step up your productivity to meet peak demand
- Total control of Top heating % Power and Bottom Heating % Power allowing total control.
- When you don't need to produce much you can save on energy by using just one baking module
- Management of 6 cooking programs: for each program you can set the cooking time, temperature and min/max adjustments to the power % of top / bottom Elements.
- Economy function keeps the oven at a lower temperature if it doesn't need to be operated at full working temperature
- Timer for programmed start, digital clock and self diagnostics


SYNTHESIS 12/100 SINGLE STACK CONVEYOR



FRONT

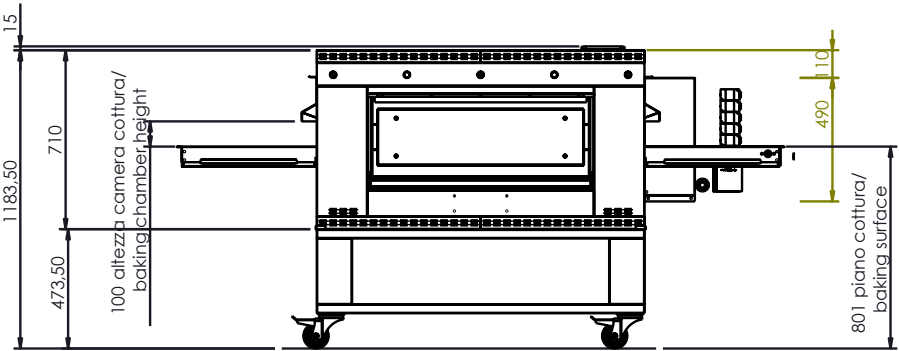


SIDE

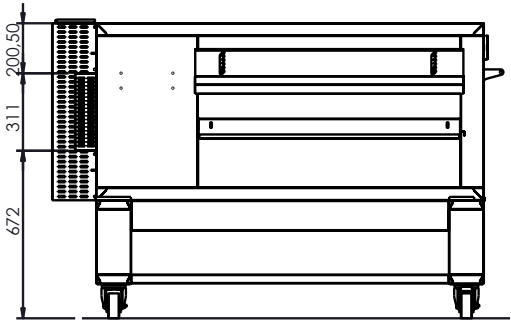


j l a b i L l j l a b i	m l q b k w ^ = L = m l t b o	
	GAS kW-(Kcal/h)	ELETTRICA kW
12/100V EL.		44+0.88

TOP

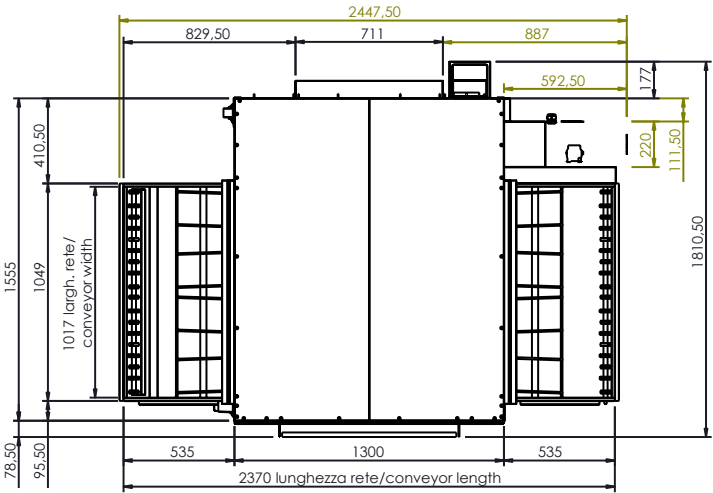

REAR

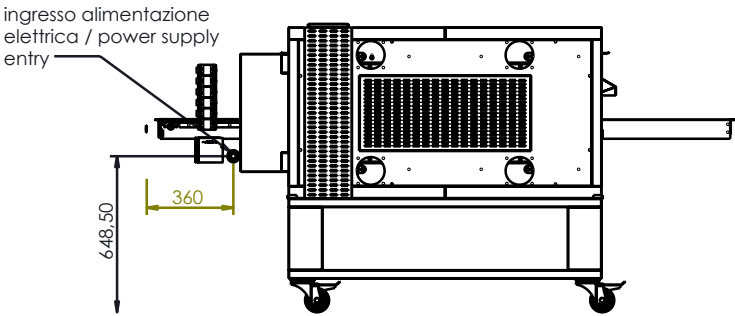


We reserve the right to alter specifications without notice.

SYNTHESIS 12/100 DOUBLE STACK CONVEYOR




FRONT

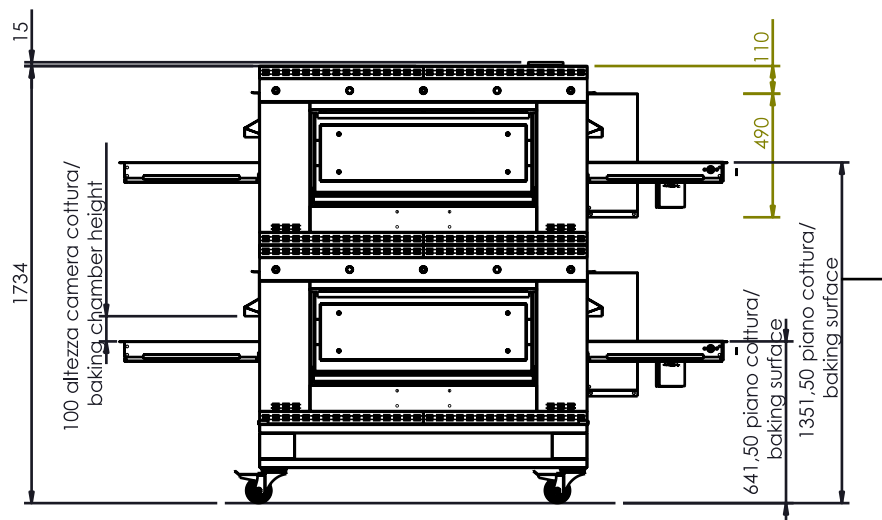


MODELLO / MODEL	POTENZA / POWER	
	GAS kW-(Kcal/h)	ELETTRICA kW
12/100V EL.		44+0.88
TOTALE N°2 MODULI/ TOTAL N°2 MODULES		88+1.76


SIDE

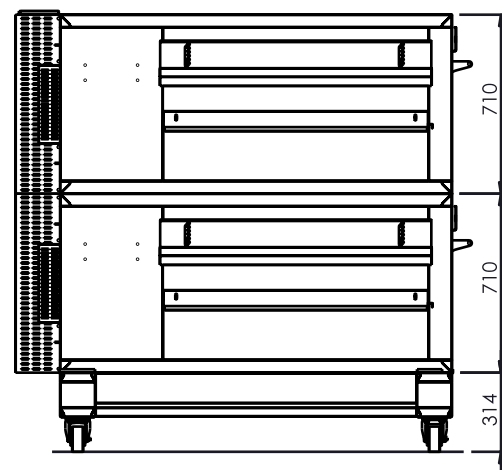

TOP

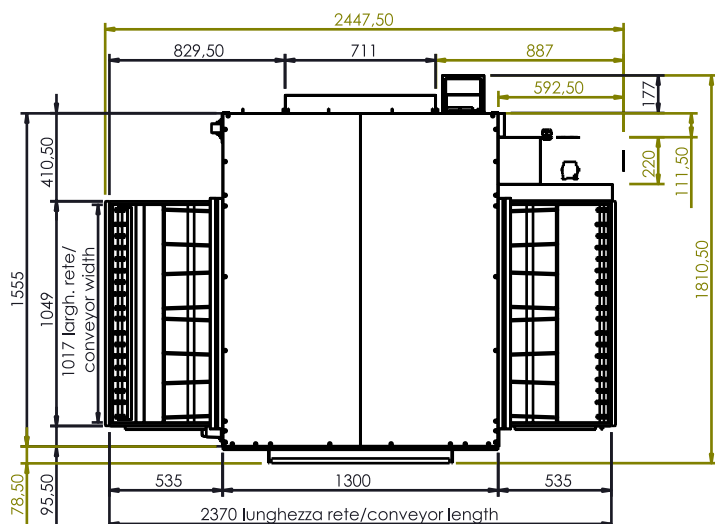

REAR

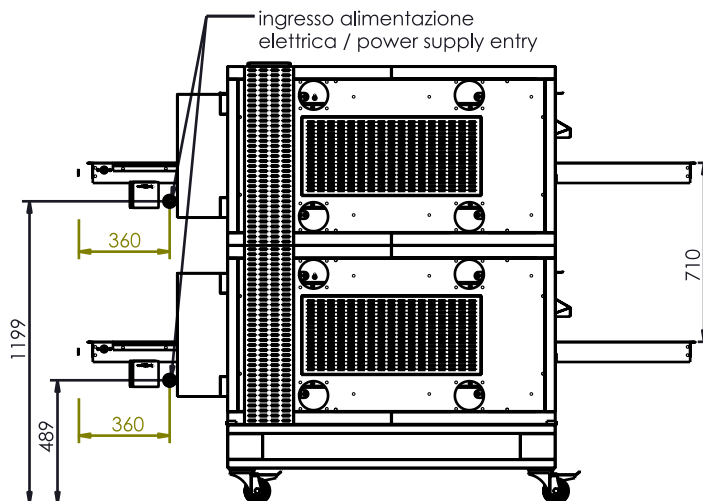

We reserve the right to alter specifications without notice.



PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au