



# E7 Series ice and water dispenser with Chewblet® ice machine

## undercounter

### Features

Compact size, only 37.1 cm (14.62") wide and 56.2 cm (22.12") depth to fit under standard counters

UD model fits under 86.4 cm (34.00") counters

3.2 kg (7 lb) ice storage capacity

Integral air-cooled ice machine with up to 54.4 kg (120 lb) daily production of popular Chewblet ice

- designed to serve up to 25 people (140 servings per 10 hr day<sup>1</sup>)
- soft, chewable, compressed nugget ice is preferred over cubes<sup>2</sup>
- environmentally responsible R134a refrigerant with zero ozone depletion potential
- energy saving sleep mode
- quiet production without noisy harvest cycles

### Durable, attractive dispenser

- modern styling, stainless steel exterior with accent trim
- dispense-activated soft blue light illuminates point-of-use
- easy-to-clean, removable 590 ml (20 oz) drip tray

### Designed with sanitation in mind

- Agion® silver-based antimicrobial product protection of key ice and water contact components<sup>3</sup>
- sanitary ice dispense reduces chance of contamination

### Installation

- comes fully assembled
- two easy connections – electric and water
- drainless design allows dispenser to be placed anywhere a water line can be run and eliminates the cost of a drain installation

### Warranty

- 2 years parts and labor, 5 years compressor parts

### Accessories

Drip tray drain kit (item# 00956375)

Cartridge, replacement 5 micron particle/carbon (item# 00968107)

Clarix® hardness removal filtration system (item# 00986059)

**NOTE:** For use in applications with greater than 5 mg/l but less than 400 mg/l total dissolved solids in water and less than 200 mg/l hardness (either naturally occurring or treated with reverse osmosis or other TDS reducing technology).  
Not recommended for use with softened water.



| 230 V 50 Hz – ice and water dispensers |                                |                     |                             |
|--|--------------------------------|---------------------|-----------------------------|
| Ice storage capacity                   | Configuration/ Height          | Filter <sup>1</sup> | Item number                 |
| <b>3.2 kg (7 lb)</b>                   | Ice and water 85.1 cm (33.50") | no filter           | <b>E7UC100A-IW-NF-ST-00</b> |
|  |                                | internal            | <b>E7UC100A-IW-CF-ST-00</b> |
|  | Ice-only 85.1 cm (33.50")      | no filter           | <b>E7UC100A-NW-NF-ST-00</b> |
|  |                                | internal            | <b>E7UC100A-NW-CF-ST-00</b> |
|  | Ice and water 80.0 cm (31.50") | no filter           | <b>E7UD100A-IW-NF-ST-00</b> |
|  |                                | internal            | <b>E7UD100A-IW-CF-ST-00</b> |
|  | Ice-only 80.0 cm (31.50")      | no filter           | <b>E7UD100A-NW-NF-ST-00</b> |
|  |                                | internal            | <b>E7UD100A-NW-CF-ST-00</b> |

<sup>1</sup> Internal filter is a 5 micron particle and carbon filter

**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au

Follett Europe Polska Sp. z o.o.  
Mokry Dwór 26C 83-021 Wiślina, Poland  
+48 (58) 785-6140 | Fax: +48 (58) 785-6159  
folletteurope.com

801 Church Lane | Easton, PA 18040, USA  
1.610.252.7301 | Fax: +1.610.250.0696 | follettice.com

**FOLLETT®**


## Specification

|  |   |
|--|---|
| Ice storage capacity                                     | 3.2 kg (7 lb)   |
| <b>W1</b> Width  | 37.1 cm (14.62")  |
| <b>D1</b> Depth  | 56.2 cm (22.12")  |
| <b>D2</b> Kick recess depth                              | 9.86 cm (3.88")   |
| <b>H1</b> Height – 7UC100A                               | 85.1 cm (33.50")  |
| <b>H1</b> Height – 7UD100A                               | 80.0 cm (31.50")  |
| <b>H2</b> Kick recess height                             | 10.16 cm (4.00")  |
| <b>H3</b> Dispense height clearance                      | 21.59 cm (8.50")  |
| Ventilation clearance                                    | 15.24 cm (6.00") front  |
| Service clearance  | 7.62 cm (3.00") behind  |
| <b>C1</b> 230 V/50/1 electrical                          | 5 amps.<br>Connect to dedicated 10 amp circuit, fuse or breaker.<br>Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord. |
| <b>C2</b> Water inlet                                    | 1/4" MPT  |
| Air temperature  | 10 - 38 C ( 50 -100 F)  |
| Water temperature  | 4 - 32 C (40 - 90 F)  |
| Water pressure   | 69 - 483 kpa ( 10 - 70 psi)   |
| Ice production at 21 C (70 F) air and 10 C (50 F) water  | 54.4 kg (120 lb)  |
| Ice production at 32 C (90 F) air and 21 C (70 F) water  | 40.8 kg (90 lb)   |
| Energy consumption 32 C (90 F) air and 21 C (70 F) water | 7.1 kWh per 45.4 kg (100 lb) ice  |
| Heat rejection   | 498 W (1700 BTU/hr)   |
| Water consumption  | 45.4 L (12 gal) of potable water per 45.4 kg (100 lb) of ice  |
| Approximate net weight                                   | 43 kg (94 lb)   |
| Approximate shipping weight                              | 46 kg (100 lb)  |

NOTE: For indoor use only. Designed for commercial use. Follett is not able to provide in-house services for residential installations.

**SHORT FORM SPECIFICATION:** (Choose one) Ice and water \_\_\_\_ or ice-only \_\_\_\_ dispenser to be Follett® automatic load in (choose one) \_\_\_\_ 85.1 cm (33.50") tall undercounter or \_\_\_\_ 80.0 cm (31.50") tall UD undercounter configuration, with 3.2 kg (7 lb) of storage. Environmentally responsible R134a ice machine to be air-cooled. Ice machine to produce approximately 54.4 kg (120 lb) of Chewblet compressed nugget ice at air temperature of 21 C (70 F) and water temperature of 10 C (50 F). Ice machine to be equipped with printed circuit board and diagnostics to allow simplified servicing and with capacitive touch user interface. Storage area to be insulated with non-CFC, high density foam-in-place polyurethane. 230 V/50/1. Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord. CE listed. Total dissolved solids in water not to great than 5 mg/l but less than 400 mg/l and hardness not to exceed 200 mg/l (either naturally occurring or treated with reverse osmosis or other TDS reducing technology).

## Dimensional drawing

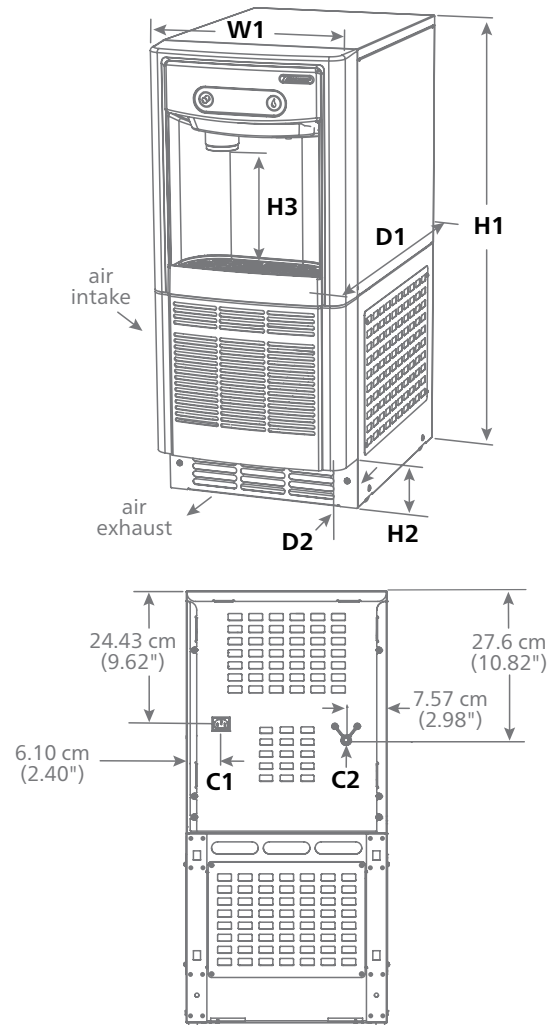

<sup>1</sup> 473 ml (16 oz) cups, 2/3 full of ice.

<sup>2</sup> Independent third party studies. Contact Follett for details.

<sup>3</sup> Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

Clarix is a registered trademark of the Aquis GmbH in Switzerland.

Agion is a registered trademark of Sciessent LLC.

Chewblet and Follett are registered trademarks of Follett LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au

## E7 Series undercounter