
specifications



CC700-4SW


Counterline - Slimline 4 Door (Swing), Integral Fridge

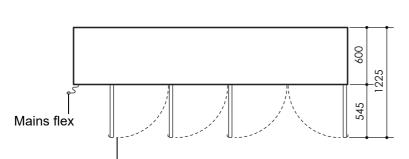

CABINET DIMENSIONS

	External	Internal
Height	725mm*	545mm
Width	2820mm	2340mm
Depth	600mm	485mm
Floor area	1.70m ²	
Gross volume	700L	

* Height excludes castors or legs

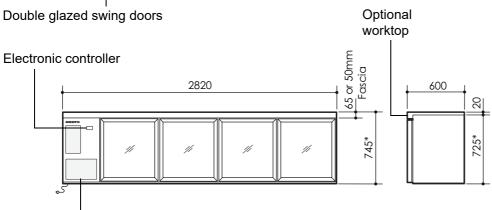

Side mounted integral refrigeration unit

CABINET SPECIFICATIONS		
Doors	Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors	
Internal door opening size	4 door openings: 544mm high x 520mm wide	
Shelves	Adjustable height, white plastic coated, steel wire shelves - two per door	
Worktop (optional)	Optional 20mm high stainless steel worktop with 65mm fascia	
Electrical safety climate class	5	
Internal lighting	2 x 20W T8 Frosted LED Tube (Ø26 x 900mm, 5500K) - Switched	
Electrical	230-240 Volts a.c. 50 Hz, single phase supply, 3.8 Amps	
Temperature range	+1°C to +4°C	
GEMS class	M1	
GEMS energy consumption	8.47 kWh/24h	
GEMS annual running cost	\$928 p.a. (@ \$0.30/kWh)	
Refrigeration system	Side mounted, integral refrigeration unit (UE21AAC-173ZC)	
Electronic controller	SKOPE CAREL ir33	
Refrigerant	R134a / 425 g	
Nominal capacity	737 Watts	
Insulation	50mm polyurethane foam	
Drainage	No plumbing required	

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2007 SKOPE Industries Limited



PSS0071 Rev. 4.2 Mar. 2021

PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

