

# CR9D

## 900mm Six Burner Gas Range Static Oven



CR9D

- 900mm wide
- 6 open burners
- 22MJ open burner rating
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners
- Cast iron burners and vitreous enamel potstands
- High crown static oven
- Capacity for one 2/1 GN or two 1/1 GN pans on oven rack
- Manual pilot ignition
- French door system
- Vitreous enameled oven liner
- Adjustable front feet and rear rollers
- Stainless steel finish
- Fully modular

### Also Available



CR9A

CR9B

CR9C

### OVERALL CONSTRUCTION

#### Cooktop

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- Vitreous enamelled control panel
- Stainless steel front, sides and splashback

#### Oven

- Vitreous enamelled oven liner
- Extra wide GN 2/1 capacity with 4 position racking
- Supplied with one chrome plated oven rack
- Vitreous enamelled oven spill tray
- Stainless steel doors and sides
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear

### CONTROLS

#### Cooktop

- Large easy use control knobs
- Variable high to low controls to open burners
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners

#### Oven

- 100-310°C thermostatic oven control
- Piezo ignition to oven pilot burner with flame failure

### CLEANING AND SERVICING

- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Stainless steel removable spill trays
- Stainless steel grease trays on griddles
- Access to all parts from front of unit

### Matching Products



CW2H

CSP6

CN4

CT9

CW3H

CW1H

CP4


CS9 / C900-S

**COBRA**<sup>®</sup>

YOUR STYLE, YOUR WAY

# CR9D

## 900mm Six Burner Gas Range Static Oven

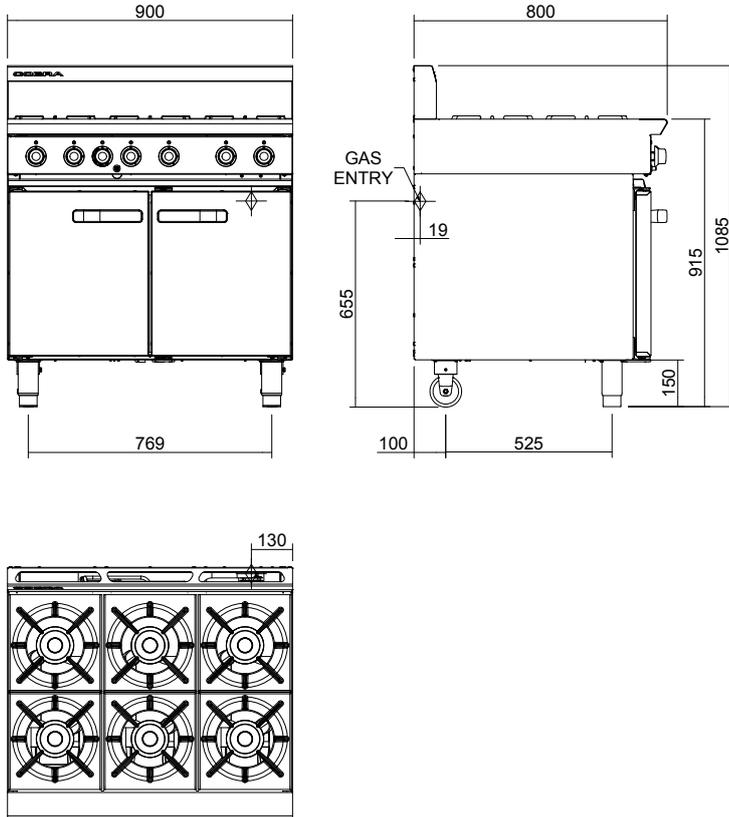

CR9D

### SPECIFICATIONS

#### Burners

Open Burners;  
22MJ/hr, 5.5kW each

Oven; 28MJ/hr, 7.8kW

Gas power (gross)  
CR9D 160MJ/hr, 44.4kW

#### Oven dimensions

Width 760mm  
Depth 615mm  
Height 365mm

#### Rack size

750mm x 590mm

Rack positions 4

#### Gas connection

R 3/4 (BSP) male  
130mm from RH side, 20mm from  
rear, and 655mm from floor

#### Dimensions

Width 900mm  
Depth 800mm  
Height 915mm  
Incl. splashback 1085mm

Nett weight  
121.5kg

#### Packing data

1.21m<sup>3</sup>, 162kg  
Width 1010mm  
Depth 955mm  
Height 1250mm

#### Gas types

Available in Natural gas and LP gas,  
please specify when ordering  
Other gas types on request



Cert. No. AGA 7225G

an Ali Group Company



The Spirit of Excellence



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au